







paslode.com

grkfasteners.com

tapcon.com



backeronrockon.com



ramsetpat.com



teksscrews.com



redheadanchoring.com



easyanchors.com

Table of Contents

PASLODE [®]		RED HEAD®	
PASLODE CORDLESS TOOLS	6-9	TRUBOLT* CONCRETE WEDGE ANCHORS	62-63
PASLODE PNUEMATIC TOOLS	10-17	RED HEAD CONCRETE ANCHORS	64-65
PASLODE MANUAL TOOLS	18-19	RED HEAD A7+ ADHESIVE ANCHORS	66-67
PASLODE FRAMING	20-21		
PASLODE FINISH & EXTERIOR	22-25		
PASLODE ACCESSORIES & CODE REPORTS	26-27	RAMSET®	
COMING SOON	28-29	RAMSET P.A.T. TOOLS & ACCESSORIES	68-69
GRK FASTENERS [™]		TEKS®	
$R4^{\scriptscriptstyle{TM}}$ MULTI-PURPOSE FRAMING & DECKING SCREWS	32-33	TEKS ROOFING SCREWS	72-73
RSS™ RUGGED STRUCTURAL SCREWS	34-35	TEKS METAL TO METAL SCREWS	74-75
DECK ELITE SCREWS	36-37	TEKS LATH SCREWS AND	76-77
FIN/TRIM™ TRIM HEAD SCREWS	38-39	WOOD TO METAL SCREWS	
RT COMPOSITE™ TRIM HEAD SCREWS	40-41		
STAINLESS STEEL SCREWS	42-43		
- 305 Stainless		BACKER-ON®, ROCK-ON®	
- 316 Marine Grade Stainless		CEMENT BOARD SCREWS, CBS	78-79
LOW PROFILE CABINET™ SCREWS	44-45		
TOP STAR™ SHIM SCREWS	46-47		
CALIBURN™ CONCRETE SCREWS	48	E-Z ANCOR®	
MSS™ METAL SIDING SCREWS	49	E-Z ANCOR MULTI-USE ANCHORS	80-81
STAR DRIVE BITS & ACCESSORIES	50		
COMING SOON	52-53		
		FASTENER APPLICATION INFORMATION	
		FASTENER APPLICATION INFORMATION	82-83
TAPCON®			
TAPCON CONCRETE SCREW ANCHORS	56-58		
TAPCON+ HEAVY DUTY CONCRETE	60-61	WARRANTIES	
SCREW ANCHORS		LIABILITY AND WARRANTIES	84-85



INNOVATION.

You could say we invented the nailer. And you would be right. Ever since we introduced the first pneumatic nailer, cordless framing nailer, and Positive Placement® metal connector system we've continued to improve our nailers and fasteners to be the best in the business.

QUALITY.

Paslode is committed to one thing. Excellence. We stand by our products above all else. Every Paslode product is engineered with expertise and battle-tested for realworld toughness and performance before it leaves our factory. Our decades of expertise in tool and nail manufacturing help us deliver products that stand up to the demands of the professionals who use them.

REPUTATION.

Nail by nail. Job by job. Day after day. We build our reputation the same way our customers do—one day at a time through hard work, reliability, and dedication. That's how Paslode became the standard by which other pneumatic and cordless fastening systems are measured. Our products are the go-to tools for professionals when it comes to framing, sheathing, trim and finish applications, fencing, floor and roof decking, siding, and insulation.





PATENTED CORDLESS TECHNOLOGY



BETTER THAN BATTERY ALONE

LIGHTER

The power of fuel means no heavy battery. Which makes our nailers the lightest on the market.

MORE RELIABLE

The simple combustion mechanism means fewer parts and less complicated wiring that can break.

MORE DURABLE

Simple self-maintenance/cleaning keeps Paslode cordless nailers running for up to 200,000 shots.





We're so confident in the quality of our cordless tools that we back each one with the industry's best guarantee.

If you have a problem with one of our cordless tools, you can send it to us and we'll fix it for free.

NO QUESTIONS.

NO HASSLES.

NO COSTS.

PASLODE® CORDLESS TOOLS **FRAMING**











CORDLESS XP 30 DEGREE FRAMING NAILER

- Power Fuel + Battery System delivers consistent power to drive nails flush, even into engineered lumber.
- Performance Proven to withstand wear and tear like no other and drives 9,000 shots per battery charge to keep you productive all day.
- Lightweight At only 7.2 lbs, the lightest cordless framing nailer on the market, even lighter than pneumatics.

CORDLESS 1-1/2" POSITIVE PLACEMENT® METAL CONNECTOR NAILER

- Convenience Move freely through the job without a hose or compressor.
- Maneuverability Lightweight and compact design for easy use overhead and in tight spaces.
- Accuracy Quickly and accurately locate holes with the Positive Placement® probe.

TOOL SPECIFICATIONS

100E 31 ECH ICATIONS	
Model	CFN325XP
Part #	906300
Weight	7.2 lbs w/battery
Dimensions	12"L x 4"W x 14.25"H
Nail Capacity	48 (1 Strip)
Nail Range	2" - 3-1/4"
Nail Diameter	.113 / .120 / .131
Nail Type	30° Paslode RounDrive® Full Head
Fuel Type	Cordless Framing Fuel (part# 816008)
Nails per Fuel Cell	Approx. 1,200
Battery	Li-ion battery (part# 902654) and Charger (part# 902667)
Battery Life	9,000 nails per charge
Warranty	1-year full 5-year extended limited

TOOL	. SPECIFICATIONS
Model	CF150-PP
Part #	906200
Weight	6.65 lbs w/battery
Dimensions	12.25"L x 5.5"W x 13.5"H
Nail Capacity	29 (1 Strip)
Nail Range	1-1/2"
Nail Diameter	.131" and .148"
Nail Type	Positive Placement® Metal Connector Nails
Fuel Type	Cordless Metal Connector Fuel (only available in fuel + nail packs)
Nails per Fuel Cell	Approx. 800
Battery	Li-ion Battery (#902654) 7 VDC
Battery Life	9,000 nails per charge
Warranty	1-year full 5-year extended limited

PASLODE® CORDLESS TOOLS

FINISH





- **Durability** Combustion technology that's proven to last for years of everyday use and exceed 150,000 shots.
- **Productivity** Narrow tapered body with high visibility no-mar tip and accurate depth control for a consistent, superior finish from shot 1 to shot 1,200.
- Lightweight Compact and lightweight. Best-in-class weight at 4.5 lbs for greater comfort, control, access and ease of use.

TOOL SPECIFICATIONS	
Model	IM250A-Li2
Part #	916200
Weight	4.5 lbs w/battery
Dimensions	12"L x 3.5"W x 11.25"H
Nail Capacity	100 (2 Strips)
Nail Range	1-1/4" - 2-1/2"
Nail Type	Angled 16GA - Galvanized
Fuel Type	Cordless Finish Fuel (part# 816007)
Nails per Fuel Cell	Approx. 1,200
Battery	Li-ion battery (part# 902654) and Charger (part #902667)
Battery Life	12,000 nails per charge
Warranty	1-year full 5-year extended limited



CORDLESS 16GA

STRAIGHT FINISH NAILER

- **Durability** Combustion technology proven to exceed 150,000 shots
- **Productivity** Consistent power from shot 1 to 1,200.
- **Lightweight** The lightest cordless finish nailer on the market.

TOOL SPECIFICATIONS	
Model	IM250S-Li
Part #	916000
Weight	4.6 lbs w/battery
Dimensions	10.5"L x 3.5"W x 11.75"H
Nail Capacity	100 (2 Strips)
Nail Range	1-1/4" - 2-1/2"
Nail Type	Straight 16GA - Galvanized
Fuel Type	Cordless Finish Fuel (part# 816007)
Nails per Fuel Cell	Approx. 1,200
Battery	Li-ion battery (part# 902654) and Charger (part #902667)
Battery Life	12,000 nails per charge
Warranty	1-year full 5-year extended limited





CORDLESS 18GA STRAIGHT BRAD FINISH NAILER

- **Durability** Combustion technology proven to exceed 150,000 shots.
- **Productivity** Consistent power from shot 1 to 1,200. Plus angled magazine to fit into tight spaces.
- **Lightweight** The lightest cordless finish nailer on the market. At only 4.6 lbs. it gives pros greater comfort, control, and ease of use.

TOOL	. SPECIFICATIONS
Model	IM200Li
Part #	918000
Weight	4.6 lbs w/battery
Dimensions	11.25"L x 3.5"W x 12"H
Nail Capacity	100 (2 Strips)
Nail Range	5/8" - 2"
Nail Type	18GA - Galvanized
Fuel Type	Cordless Finish Fuel (part# 816007)
Nails per Fuel Cell	Approx. 1,200
Battery	Li-ion battery (part# 902654) and Charger (part #902667)
Battery Life	12,000 nails per charge
Warranty	1-year full 5-year extended limited



CORDLESS 18GA STRAIGHT BRAD FINISH NAILER 1-STRIP

- Maneuverable Able to fit in tight spaces where others can't.
- Precise Drives nails flush for high quality craftsmanship.
- **Lightweight** The lightest cordless nailer on the market makes for reduced fatigue and increased productivity.

TOOL SPECIFICATIONS	
Model	IM200Li.2
Part #	918100 (Compact Mag)
Weight	4.25 lbs w/battery
Dimensions	11"L x 3.5"W x 11.5"H
Nail Capacity	50 (1 Strip)
Nail Range	5/8" - 2"
Nail Type	18GA - Galvanized
Fuel Type	Cordless Finish Fuel (part# 816007)
Nails per Fuel Cell	Approx. 1,200
Battery	Li-ion battery (part# 902654) and Charger (part #902667)
Battery Life	12,000 nails per charge
Warranty	1-year full 5-year extended limited

PASLODE® PNEUMATIC TOOLS

FRAMING



30 DEGREE POWERMASTER PLUS™ FRAMING NAILER

- **Durable** Built to last and requires less maintenance.
- Reliable Consistently drives nails flush.
- **Powerful** Proven performance on the toughest jobsites.



30 DEGREE

POWERFRAMER™ FRAMING NAILER


- **Durable** Reliable performance, minimum service.
- Powerful It drives nails flush, even in LVL.
- Lightweight Works faster with less fatigue.

TOOL SPECIFICATIONS	
Model	F350S
Part #	501000
Weight	8.4 lbs
Dimensions	19.25"L x 6.5"W x 13.25"H
Nail Capacity	2 Strips (84 nails)
Nail Range	2" - 3-1/2"
Nail Diameter	.113 / .120 / .131
Nail Type	30 Degree Paper Tape RounDrive®
Operating Pressure	80-120 psi (5.5 - 8.3 bar)
Warranty	1-year full 5-year extended limited

TOOL SPECIFICATIONS	
Model	PF350S
Part #	502000
Weight	7.5 lbs
Dimensions	18"L x 5"W x 13"H
Nail Capacity	2 Strips (84 nails)
Nail Range	2" - 3-1/2"
Nail Diameter	.113 / .120 / .131
Nail Type	30 Degree Paper Tape RounDrive®
Operating Pressure	80-120 psi (5.5 - 8.3 bar)
Warranty	1-year full 5-year extended limited







30 DEGREE COMPACT FRAMING NAILER

- **Compact** At only 12 inches long, fits easily into tight spaces.
- **Lightweight** Comfortable and maneuverable when working overhead.
- **Productive** By-pass follower provides quick re-load for increased productivity.

TOOL SPECIFICATIONS	
Model	F325R
Part #	513000
Weight	5.9 lbs
Dimensions	12.3"L x 4.3"W x 12.9"H
Nail Capacity	1 strip (42 nails)
Nail Range	2" - 3-1/4"
Nail Diameter	.113 / .120 / .131
Nail Type	30 Degree Paper Tape RounDrive®
Operating Pressure	90-120 psi (6.2 - 8.3 bar)
Warranty	1-year full 5-year extended limited

PASLODE® PNEUMATIC TOOLS

POSITIVE PLACEMENT® & tetraGRIP™





- Fast and accurate The innovative Positive Placement® probe tip guides nails for unmatched hole to hole speed.
- **Versatile** Drives both 1½" and 2½" Positive Placement® metal connector nails with shank diameters from .131 to 162.
- **Powerful** Powerful motor drives nails flush, even into engineered lumber.

TOOL SPECIFICATIONS	
Model	F250S-PP
Part #	500855
Weight	8.5 lbs
Dimensions	19.5"L x 5"W x 13.88"H
Nail Capacity	44 (2 Strips)
Nail Range	1-1/2" - 2-1/2"
Nail Diameter	.131 / .148 / .162
Nail Type	Positive Placement® Brite, Galvanized
Operating Pressure	80-120 psi (5.5 - 8.3 bar)
Warranty	1-year full 5-year extended limited



1½" POSITIVE PLACEMENT® METAL CONNECTOR NAILER

- Fast Positive Placement® probe for fastest hole to hole speed which provides widest angle of approach.
- Accurate Probing tip guides nails into hardware holes.
- **Powerful** Drives up to 1½" x .148 Metal Connector Nails flush even into LVL for all day performance.

TOOL SPECIFICATIONS	
Model	F150S-PP
Part #	515850
Weight	6.25 lbs
Dimensions	13"L x 3.7"W x 11.7"H
Nail Capacity	29 (1 Strip)
Nail Range	1-1/2"
Nail Diameter	.131 / .148
Nail Type	Positive Placement® Brite, Galvanized
Operating Pressure	90-120 psi (6.2 - 8.3 bar)
Warranty	1-year full 5-year extended limited







tetraGRIP™ COIL SUBFLOOR FASTENING SYSTEM

- Eliminates Nail Induced Floor Squeaks tetraGRIP fastener rotates as it drives to bond with the wood fibers. Use of glue between sheathing panels and floor framing is not required.
- Reduces Builder Warranty Costs Fewer call backs & repair costs
- **Reduces Framer Repair Costs** More efficient than screws and saves the framing company time and labor costs

TOOL SPECIFICATIONS		
Model	PF237C	
Part #	503000	
Weight	8.3 lbs	
Dimensions	12.25"L x 5"W x 13.5"H	
Nail Capacity	120 (1 Coil)	
Nail Range	2-3/8"	
Nail Diameter	.113	
Nail Type	tetraGRIP™ 0 Degree Coil Subfloor Fastener	
Operating Pressure	90-120 psi (6.2 - 8.3 bar)	
Warranty	1-year full 5-year extended limited	

		_					
tetraGRIP™ SUBFLOOR FASTENER							
Part #	Length	Diameter	Shank	Finish	Fasteners/ Coil		Fasteners/ Carton
650605	2-3/8"	.113	Barbed	Brite	120	18	2.160



tetraGRIPTM COIL SIDING NAILER SYSTEM

- Fast Install fiber cement siding 20% faster on average. Fast, secure installation without fasteneing to studs.
- Maneuverability The tetraGRIP™ Coil Siding Nailer weighs in at 4.9 lbs and has a compact design for maximum maneuverability.

TOOL SPECIFICATIONS		
Model	TG100CSN	
Part #	515400	
Weight	4.9 lbs	
Dimensions	12.25"L x 6"W x 11.5"H	
Nail Capacity	120 (1 Coil)	
Nail Range	1-1/8"	
Nail Diameter	.117	
Nail Type	tetraGRIP™ 0 Degree Studless Coil Siding Fastener	
Operating Pressure	90-120 psi (6.2 - 8.3 bar)	
Warranty	1-year full 5-year extended limited	

tetraGRIP™ SIDING FASTENER							
Part #	Length	Dia.	Shank	Finish	Fasteners/ Coil		Fasteners/ Carton
650964	1-1/8"	.117	Barbed	Galv. Steel	120	30	3,600

PASLODE® PNEUMATIC TOOLS

FINISH & EXTERIOR



16GA STRAIGHT

FINISH NAILER

- **Lightweight** Optimal balance, maximum comfort, and reduced fatigue for increased productivity.
- **Consistent** Each time the trigger is pulled, the nail drives flush into the applications.
- **Durable** Oil-free design allows for long term, maintenance free operation which reduced associated costs.

TOOL SPECIFICATIONS		
Model	T250S-F16P	
Part #	515500	
Weight	3.9 lbs	
Dimensions	12.3"L x 2.9"W x 11.6"H	
Nail Capacity	100 (2 Strips)	
Nail Range	1" - 2-1/2"	
Magazine Angle	Straight Collation	
Nail Type	16GA Galvanized Straight	
Operating Pressure	80-120 psi (5.5 - 8.3 bar)	
Warranty	1-year full 5-year extended limited	



18GA STRAIGHT

BRAD FINISH NAILER

- **Durability** Rugged lightweight body withstands high impact even if dropped.
- **Reliability** Professional-grade design offers consistent drive to finish the job right the first time.
- **Precision** Smaller nose provides clear line of sight for accurate nail placement.

TOOL	_ SPECIFICATIONS
Model	T200-F18P
Part #	515600
Weight	2.9 lbs
Dimensions	10.04"L x 2.56"W x 10.63"H
Nail Capacity	100 (2 Strips)
Nail Range	5/8" - 2"
Magazine Angle	Straight Collation
Nail Type	18GA Galvanized Straight
Operating Pressure	80-120 psi (5.5 - 8.3 bar)
Warranty	1-year full 5-year extended limited





O DEGREECOIL SIDING NAILER

- **Consistent** Reliable depth of drive means greater efficiency on jobsites
- Clean Finish Eliminates wire flagging
- **Lightweight & Balanced** Increase comfort to work longer and finish jobs faster

TOOL SPECIFICATIONS		
Model	PS225C	
Part #	515900	
Weight	4.5 lbs	
Dimensions	12-1/2"L x 5-3/4"W x 12-5/8"H	
Nail Capacity	300 (1 Coil)	
Nail Range	1-1/2"-2-1/4"	
Nail Diameter	.080105	
Nail Type	0 Degree Plastic Collated Coil Nails	
Operating Pressure	80-120 psi	
Warranty	1-year full 5-year extended limited	

PASLODE® PNEUMATIC TOOLS STAPLERS



16GA STANDARD CROWN STAPLER

- Speed Up to 10 staples per second.
- Power Drives flush in all materials.
- Durable Heavy duty all-metal magazine design.

TOOL SPECIFICATIONS		
Model	SCS200	
Part #	515700	
Weight	5.6 lbs	
Dimensions	15.1"L x 3.4"W x 11.7"H	
Magazine Capacity	150 staples	
Staple Range	3/4" - 2"	
Staple Type	1/2" Crown 16GA Galvanized	
Operating Pressure	80-120 psi (5.5 - 8.3 bar)	
Warranty	1-year full 5-year extended limited	



16GA WIDE CROWN STAPLER

- **Speed** Up to 10 staples per second.
- Power Drives flush in all materials.
- Durable Heavy duty all-metal magazine design.

TOOL SPECIFICATIONS		
Model	WCS200	
Part #	515800	
Weight	5.9 lbs	
Dimensions	15.1"L x 3.4"W x 11.7"H	
Magazine Capacity	150 staples	
Staple Range	3/4" - 2"	
Staple Type	15/16" Crown 16GA Galvanized	
Operating Pressure	80-120 psi (5.5 - 8.3 bar)	
Warranty	1-year full 5-year extended limited	





18GA CAPSTAPLER

- Convenient Staples and caps in one easy step.
- **Consistent Drive Performance** Saves time on roofing felt and housewrap.
- **Easy Loading** Open design makes staple and cap reloading a snap.

TOOL SPECIFICATIONS		
Model	CS150	
Part #	502575	
Weight	4.8 lbs	
Dimensions	15.5"L x 4"W x 10.5"H	
Staple Capacity	90 Staples	
Cap Capacity	1 Spool (240 Caps)	
Staple Range	1" - 1-1/2 "	
Staple Type	18GA 3/8" Narrow Crown	
Operating Pressure	70-110 psi (4.8 - 7.6 bar)	
Warranty	1-year full 5-year extended limited	

PASLODE® MANUAL TOOLS STAPLERS



20GA HAMMER TACKER STAPLER

- **Durable** Industrial strength design keeps you working for years
- **Professional** Engineered specifically for professional building applications
- **Reliable** Reduces tearing in roof paper, insulation and housewrap

TOOL SPECIFICATIONS		
Model	HT-550	
Part #	1013290	
Weight	2 lbs	
Dimensions	11.25"L x 1.25"W x 3"H	
Magazine Capacity	168 staples (2 strips)	
Staple Type	5000 Series	
Staple Gauge	20	
Staple Crown Width	1/2"	
Staple Length	1/4" - 3/8"	



20GA COMPRESSION STAPLER

- Simple Install staples with an easy push/squeeze
- **Professional** Engineered specifically for professional building applications
- **Versatile** Adjust installation power for the specific job requirements

TOOL SPECIFICATIONS		
Model	CS-5000	
Part #	1011910	
Weight	1.8 lbs	
Dimensions	7.5"L x 1.50"W x 4.75"H	
Magazine Capacity	84 staples (1 strip)	
Staple Type	5000 Series	
Staple Gauge	20	
Staple Crown Width	1/2"	
Staple Length	1/4" - 9/16"	





PASLODE® FRAMING FUEL, NAILS & FUEL+ NAIL PACKS

FUEL



PART #	PRODUCT	DESCRIPTION	ASSOCIATED PRODUCT(S)
816008	Cordless Framing Fuel -	Drives 1,200 nails,	906300 - CFN325XP Cordless XP Framing Nailer
	All Season	27 - month shelf life	905600 - CF325XP Cordless Framing Nailer
			902600 - CF325Li Cordless Framing Nailer
			900420 - IMCT Cordless Framing Nailer (with valve)

FUEL + NAIL PACKS







CORDLESS FRAMING FUEL + NAIL PACKS								
Part # Length Diamete		Diameter	Shank	Finish	Qty.			
650564	2"	.113	Ring	HDG	1,000			
650526	2-3/8"	.113	Ring	HDG	1,000			
650522	2-3/8"	.113	Smooth	Brite	1,000			
650523	2-3/8"	.113	Ring	Brite	1,000			
650565	2-3/8"	.113	Ring	Brite	3,000			
650527	3"	.120	Ring	*HDG	1,000			
650524	3"	.120	Smooth	*Brite	1,000			
650631	3"	.120	Smooth	*Brite	3,000			
650525	3"	.131	Smooth	*Brite	1,000			
650566	3"	.131	Smooth	*Brite	3,000			
650535	3-1/4"	.131	Smooth	*Brite	1,000			
650630	3-1/4"	.131	Smooth	*Brite	3,000			
650615	3-1/4"	.131	Smooth	*HDG	900			
	Part # 650564 650526 650522 650523 650565 650527 650524 650631 650525 650566 650535	Part # Length 650564 2" 650526 2-3/8" 650522 2-3/8" 650523 2-3/8" 650565 2-3/8" 650527 3" 650524 3" 650631 3" 650566 3" 650535 3-1/4" 650630 3-1/4"	Part # Length Diameter 650564 2" .113 650526 2-3/8" .113 650522 2-3/8" .113 650523 2-3/8" .113 650565 2-3/8" .113 650527 3" .120 650524 3" .120 650631 3" .131 650566 3" .131 650535 3-1/4" .131 650630 3-1/4" .131	Part # Length Diameter Shank 650564 2" .113 Ring 650526 2-3/8" .113 Smooth 650522 2-3/8" .113 Ring 650523 2-3/8" .113 Ring 650565 2-3/8" .113 Ring 650527 3" .120 Ring 650524 3" .120 Smooth 650531 3" .131 Smooth 650566 3" .131 Smooth 650535 3-1/4" .131 Smooth 650630 3-1/4" .131 Smooth	Part # Length Diameter Shank Finish 650564 2" .113 Ring HDG 650526 2-3/8" .113 Ring HDG 650522 2-3/8" .113 Smooth Brite 650523 2-3/8" .113 Ring Brite 650565 2-3/8" .113 Ring Brite 650527 3" .120 Ring *HDG 650524 3" .120 Smooth *Brite 650631 3" .120 Smooth *Brite 650525 3" .131 Smooth *Brite 650535 3-1/4" .131 Smooth *Brite 650630 3-1/4" .131 Smooth *Brite			

Note: 1,000 count cartons contain 1 fuel cell. 3,000 count cartons contain 3 fuel cells






CORDLESS POSITIVE PLACEMENT® FUEL + NAIL PACKS							
Part #	Length	Diameter	Shank	Finish	Qty.		
650921	1-1/2"	.131	Smooth	Brite, Heat Treated	800		
650923	1-1/2"	.131	Smooth	Mech Galv, Heat Treated	800		
650935	1-1/2"	.131	Smooth	Brite, Heat Treated	1,600		
650937	1-1/2"	.131	Smooth	Mech Galv, Heat Treated	1,600		
650922	1-1/2"	.148	Smooth	Brite, Heat Treated	800		
650924	1-1/2"	.148	Smooth	Mech Galv, Heat Treated	800		
650936	1-1/2"	.148	Smooth	Brite, Heat Treated	1,600		
650938	1-1/2"	.148	Smooth	Mech Galv, Heat Treated	1,600		



FRAMING NAILS



30° ROUNDRIVE® FRAMING NAILS							
Part #	Length	Diameter	Shank	Finish	#/Box		
650272	2"	.113	Smooth	Brite	5,500		
650381	2"	.113	Ring	HDG	2,000		
650273	2"	.113	Ring	Brite	5,500		
650382	2-3/8"	.113	Smooth	HDG	2,000		
650237	2-3/8"	.113	Smooth	Brite	5,000		
650383	2-3/8"	.113	Ring	HDG	2,000		
650238	2-3/8"	.113	Ring	Brite	5,000		
650966	2-3/4"	.120	Smooth	Brite	3,500		
650836	3"	.120	Smooth	Brite	2,500		
650384	3"	.120	Smooth	HDG	2,000		
650385	3"	.120	Ring	HDG	2,000		
650967	3"	.120	Ring	Brite	3,000		
405253	2-1/2"	.131	Smooth	Brite	3,000		
650830	3"	.131	Smooth	Brite	2,500		
650386	3"	.131	Smooth	HDG	2,000		
650387	3"	.131	Ring	HDG	2,000		
650969	3"	.131	Ring	Brite	2,500		
650839	3-1/4"	.131	Smooth	Brite	2,500		
650388	3-1/4"	.131	Smooth	HDG	2,000		
650474	3-1/4"	.131	Ring	HDG	2,000		
650968	3-1/2"	.131	Smooth	Brite	2,500		
650476	3-1/2"	.131	Smooth	HDG	2,000		
657381	2"	.113	Ring	HDG	750		
657604	2-3/8"	.113	Smooth	Brite	750		
657603	2-3/8"	.113	Ring	Brite	750		
657383	2-3/8"	.113	Ring	HDG	750		
657836	3"	.120	Smooth	Brite	750		
657385	3"	.120	Ring	HDG	750		
657830	3"	.131	Smooth	Brite	750		
657387	3"	.131	Ring	HDG	750		
657388	3-1/4"	.131	Smooth	HDG	750		
657839	3-1/4"	.131	Smooth	Brite	750		



Positive Placement® Nail heads marked for easy identification

POSI	POSITIVE PLACEMENT® METAL CONNECTOR NAILS							
Part #	Length	Dia.	Finish	#/Box				
650645 (4 boxes per c	1-1/2" arton, 4,000 Q ^a	.131 ty)	Brite, Heat Treated	1,000				
650025 (Bulk box)	1-1/2"	.131	Brite, Heat Treated	4,000				
650646 (3 boxes per c	1-1/2" arton, 3,000 Q	.148	Brite, Heat Treated	1,000				
650026 (Bulk box)	1-1/2"	.148	Brite, Heat Treated	3,000				
650199 (Bulk box)	2-1/2"	.131	Brite, Heat Treated	2,500				
650027 (Bulk box)	2-1/2"	.148	Brite, Heat Treated	2,500				
650028 (Bulk box)	2-1/2"	.162	Brite, Heat Treated	2,000				
650197 (Bulk box)	1-1/2"	.131	Mech. Galv, Heat Treated	4,000				
650481 (4 boxes per c	1-1/2" arton, 2,000 Q	.148	Mech. Galv, Heat Treated	500				
650014 (Bulk box)	1-1/2"	.148	Mech. Galv, Heat Treated	3,000				
650106 (Bulk box)	2-1/2"	.148	Mech. Galv, Heat Treated	2,500				
650198 (Bulk box)	2-1/2"	.162	Mech. Galv, Heat Treated	2,000				


For use with 515850 (1-1/2") and 500855 (1-1/2" + 2-1/2")

For use with 906300, 501000, 502000 and 513000

PASLODE® FINISH & EXTERIOR

FUEL, NAILS & STAPLES

FINISH FUEL

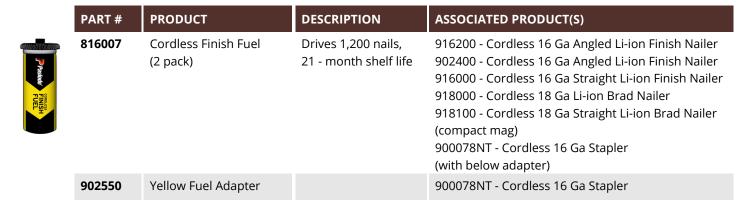

FINISH NAILS



16GA ANGLED FINISH							
Part #	Length	Gauge	Finish	Qty.			
650230	1-1/4"	16 GA Angled	Galvanized	2,000			
650231	1-1/2"	16 GA Angled	Galvanized	2,000			
650047	2"	16 GA Angled	Galvanized	2,000			
650232	2-1/2"	16 GA Angled	Galvanized	2,000			

6 boxes per carton, 12,000 Qty For use with 902400, 900600 and 500910



18GA BRAD NAILS							
Part #	Length	Gauge	Finish	Qty.			
650212	1"	18 GA Brad	Galvanized	2,000			
650213	1-1/4"	18 GA Brad	Galvanized	2,000			
650214	1-1/2"	18 GA Brad	Galvanized	2,000			
650215	2"	18 GA Brad	Galvanized	2,000			

6 boxes per carton, 12,000 Qty For use with 918000, 918100, 515600 and 500959 PAGE 22



16GA STRAIGHT FINISH								
Part #	Length	Gauge	Finish	Qty.				
650282	1-1/4"	16 GA Straight	Galvanized	2,000				
650283	1-1/2"	16 GA Straight	Galvanized	2,000				
650285	2"	16 GA Straight	Galvanized	2,000				
650287	2-1/2"	16 GA Straight	Galvanized	2,000				

6 boxes per carton, 12,000 Qty For use with 916000, 515500 and 501680



STAPLES





16GA STANDARD (1/2") CROWN STAPLES							
Part #	Length Wire Crown Finish		Qty.				
0T5242	1"	16GA	1/2"	Galvanized	16,500		
0T5238	1-1/4"	16GA	1/2"	Galvanized	13,500		
0T2695	1-1/2"	16GA	1/2"	Galvanized	10,500		
0T2250	1-3/4"	16GA	1/2"	Galvanized	9,000		
0T2258	2"	16GA	1/2"	Galvanized	7,500		

For use with 515700, 900078NT, and 501230

16GA WIDE (15/16") CROWN STAPLES							
Part #	Length	Wire	Crown	Finish	Qty.		
404069	7/8"	16GA	15/16"	Galvanized	9,000		
404070	1"	16GA	15/16"	Galvanized	9,000		
404071	1-1/4"	16GA	15/16"	Galvanized	9,000		
0T2855	1-1/2"	16GA	15/16"	Galvanized	10,500		
650098	1-3/4"	16GA	15/16"	Galvanized	9,000		

For use with 515800, and 501265



	20GA (1/2") CROWN 5000 SERIES STAPLES								
Part #	Length	Wire	Crown	Finish	Point	Qty.	Ctns/Case		
650929	1/4"	20GA	1/2"	Galvanized	Chisel	5,000	20		
650925	5/16"	20GA	1/2"	Galvanized	Chisel	5,000	20		
650932	5/16"	20GA	1/2"	Galvanized	Divergent	5,000	20		
650926	5/16"	20GA	1/2"	Galvanized	Chisel	5,000	10		
650934	5/16"	20GA	1/2"	Galvanized	Chisel	1,000	20		
650928	3/8"	20GA	1/2"	Galvanized	Chisel	5,000	20		
650930	3/8"	20GA	1/2"	Galvanized	Chisel	5,000	10		
650927	1/2"	20GA	1/2"	Galvanized	Chisel	5,000	20		
650931	9/16"	20GA	1/2"	Galvanized	Chisel	5,000	20		
650933	9/16"	20GA	1/2"	Galvanized	Chisel	5,000	10		

For use with 1013290 and 1011910

PASLODE® FINISH & EXTERIOR STAPLES (CONT.) & COIL SIDING NAILS

CAP STAPLES



FasCaps PLASTIC CAPS AND STAPLES						
Part #	Length	Wire	Crown	Finish	Qty.	
650592	1"	18GA	3/8"	Galvanized	10,080	
650597	1-1/2"	18GA	3/8"	Galvanized	8,640	

FasCaps are 6 inner boxes per carton For use with 502575

COIL SIDING NAILS



0 DEGREE COIL SIDING NAILS								
Part #	Length	Dia.	Shank	Shank Finish				
650955	1-7/8"	.086	Ring	Hot Dipped Galv.	3,600			
650958	1-7/8"	.091	Ring	Electro-Galvanized	9,000			
650960	1-7/8"	.091	Smooth	Electro-Galvanized	9,000			
650954	1-7/8"	.099	Screw	Aluminum	9,000			
650959	2"	.092	Smooth	Hot Dipped Galv.	3,600			
650956	2-1/4"	.092	Ring	Hot Dipped Galv.	3,600			
650957	2-1/4"	.099	Smooth	Electro-Galvanized	7,200			
650961	2-1/4"	.099	Ring	Electro-Galvanized	7,200			

Note: Coils contain 300 fasteners





PAGE 25

PASLODE® ACCESSORIES & CODE REPORTS CORDLESS & PNEUMATIC

CORDLESS BATTERIES

PART#	PRODUCT	DESCRIPTION	ASSOCIATED PRODUCT(S)		
902654	Paslode 7V Li-ion Battery	Framing: 9,000 nails per charge Finish: 12,000 nails per charge Full charge in 90 minutes	906300 - CFN325XP Cordless XP Framing Nailer 905600 - CF325XP Cordless Framing Nailer 916200 - Cordless 16 Ga Angled Li-ion Finish Nailer 902400 - Cordless 16 Ga Angled Li-ion Finish Nailer 916000 - Cordless 16 Ga Straight Li-ion Finish Nailer 918000 - Cordless 18 Ga Li-ion Brad Nailer 906200 - CF150-PP Cordless 1-1/2" Positive Placement Metal Connector Nailer		
902667	Paslode 7V Li-ion Battery Charger	2x faster charge time, 2 minute quick charge drives up to 200 nails	902654 - Paslode 7V Li-ion Battery		
219413	Auto Adapter Kit	Charger base and auto adapter cord	All Paslode Li-ion Tools		
900200	Paslode Ni-Cd Stick Battery Charger	2 hour charge time	404717, 404717A - Oval Ni-Cd Battery		
404717A	Oval Ni-Cd Battery 3-pack	Drives up to 4,000 nails per charge; Recharges within 2 hours	902200 - CF325 Cordless Framing Nailer 900420 - IMCT Cordless Framing Nailer 900600 - IM250A Cordless 16 Ga Angled Finish Nailer 901000 - Cordless 18 Ga Brad Nailer 902000 - Cordless 16 Ga Straight Finish Nailer		

CORDLESS ACCESSORIES

		,	
PART #	PRODUCT	DESCRIPTION	ASSOCIATED PRODUCT(S)
219377	Cordless 7V Li-ion Framing Tune-up Kit		905600 - CF325XP Cordless Framing Nailer 906300 - CFN325XP Cordless XP Framing Nailer 902600 - CF325Li Cordless Framing Nailer
219409	Cordless Li-ion Finish/Trim Tune-up Kit		902400 - IM250A-Li 16 Ga Angled Li-ion Finish Nailer 916000 - IM250S-Li 16 Ga Straight Li-ion Finish Nailer 918000 - IM200Li 18 Ga Straight Li-ion Brad Nailer
219348	Cordless Tool Cleaner	12oz. Bottle	All Paslode Cordless Tools
401482	Cordless Nailer Lubrication Oil	4oz. Bottle	All Paslode fuel-powered cordless nailers
902473	No-Mar Tips	3-pack - Angled	902400 - Cordless 16 Ga Angled Finish Nailer 916200 - Cordless 16 Ga Angled Li-ion Finish Nailer
219236	No-Mar Tips	3-pack - Straight	916000 - Cordless 16 Ga Straight Finish Nailer
901252	No-Mar Work Contact Element	1-pack - Framing	905600 - CF325XP Cordless Framing Nailer 906300 - CFN325XP Cordless Framing Nailer 902600 - CF325Li Cordless Framing Nailer 902200 - CF325 Cordless Framing Nailer



PNEUMATIC ACCESSORIES

PART#	PRODUCT	DESCRIPTION	ASSOCIATED PRODUCT(S)
403720	Pneumatic Nailer Lubrication Oil	12 oz. Bottle	All Paslode pneumatic nailers
219228	No-Mar Nose	Protects wood surfaces	501000 - F350-S PowerMaster Plus

CODE REPORTS

LISTED MANUFACTURER	PRODUCT	ESR NUMBER	QR CODE
ISANTA	Power-Driven Staples and Nails	ESR-1539	
Paslode, An Illinois Tool Works Company	Paslode Positive Placement Nails and Duo-Fast Connector Framing Nails	ESR-2126	
Paslode, An Illinois Tool Works Company	Paslode tetraGRIP nails	ESR-3071	
Paslode, An Illinois Tool Works Company	Paslode Nails	ESR-3072	回表 (B) (S) (A) (A) (B) (A) (B) (B) (B) (B) (B) (B) (B) (B
Paslode, An Illinois Tool Works Company	Paslode and Duo-Fast Galvanized Nails	ESR-3326	

COMING SOON IN 2024





The XP is becoming the XPro.

The lightweight, fuel-driven nailer, now with sequential and rapid fire modes.

- **Reliability** Consistently drives nails from the first shot to the last.
- **Productivity** Drives 8x more nails per battery charge than battery only tools.
- **Power** 10% more power than previous XP model.







CORDLESS 0 DEGREE COIL SIDING AND FENCING NAILER

- **Convenient** More maneuverability and increased efficiency. No need to set up an air compressor or move a hose for a few hours of work.
- **Consistent** Fuel powered. Set the depth once and get the same performance every time.
- **Productive** Fast, accurate drive helps you work faster.



FASTENERS[™]

GREATNESS AT EVERY TURN

GRK Fasteners offers a wide selection of fasteners that includes multipurpose, structural, deck, trim, cabinet, composite and stainless screws, but they all have one thing in common—quality.

GRK Fasteners allows users to complete jobs with more productivity. Our patented W-CutTM Threadform feature reduces installation torque and allows fast driving and ease of install, the recessed Star Drive eliminates recess stripping for improved productivity, and the Zip-TipTM feature eliminates the need for pre-drilling and allows one-step installation. GRK's feature-rich screws drive jobsite productivity and allow users to keep moving from one job to the next.

GRK fasteners are corrosion resistant, approved for use in treated lumber and designed for both interior and exterior use.





R4TM MULTI-PURPOSE FRAMING & DECKING SCREWS



FASTER DRIVE FOR IMPROVED PRODUCTIVITY

GRK's R4™ Multi-purpose Screw is a versatile, code-approved fastener for hundreds of applications. Its feature-rich design provides a fast and reliable connection every time.

- Fast Bite Tip: Provides a fast start for one-step installation
- **Zip-Tip™:** Eliminates pre-drilling
- W-Cut™: Low torque, faster drive
- **Precision Fit:** Reduces wobble between R4 screws and GRK bits for improved productivity¹
- CEE Thread™: Enlarges hole to reduce splitting²
- Star Drive Recess: Zero stripping, with 6 points of contact
- Underhead Cutting Teeth: Cuts wood fiber & provides flush seating
- GRK Head Markings: Easy identification of genuine GRK screws
- Climatek™ Indoor/Outdoor Coating: ICC-ES AC257 code approved for use in treated lumber³
- Code Approved: For structural applications (see ESR-3201)⁴
- Some sizes also available in 305 and 316 grade Stainless Steel
 For interior / exterior use
- 1. Precision Fit included on #9 and #10 sizes only
 - 2. CEE Thread included on fasteners 2" and longer
 - 3. For cedar, redwood and other naturally protected woods, GRK 305 and 316 stainless steel is recommended
 - 4. ICC Code Approval for #9, #10, and #12 sizes only






ESR-3201



AC257 Treated Lumber Approved



	U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Contractor Packs (XL buckets) Part No.	Contractor Packs (XL buckets) Qty.	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack MC Qty./ Screw Qty. (per EA)
T-15	#6 x 1-1/4"	00051	13,000						
T-15	#8 x 1-1/4" #8 x 1-1/2" #8 x 1-3/4" #8 x 2" #8 x 2-1/2"	00073	6,500			01069 01073 01075 01077 01079	1,300 1,000 925 850 650	96080 96085 02075 02077 02079	4/110 4/110 20/100 20/100 20/100
T-25	#9 x 1-1/4" #9 x 1-1/2" #9 x 1-3/4" #9 x 2" #9 x 2-1/2" #9 x 2-3/4" #9 x 3-1/8"	00091 00095 00097 00099 00101 00103 00105	8,000 5,200 4,500 3,700 2,900 2,000 1,900	120990 121010 121050	990 900 720	01095 01099 01101 01103 01105	820 690 575 480 425	02095 103099 103101 02103 103105	20 / 100 4 / 110 4 / 100 10 / 100 4 / 80
T-25	#10 x 2" #10 x 2-1/2" #10 x 2-3/4" #10 x 3-1/8" #10 x 3-1/2" #10 x 4" #10 x 4-3/4"	00131 00133 00135 00137 00139 00141 00143	3,200 2,500 2,000 1,500 1,200 1,000 800	95200 121410	630 450	01133 01137 01139 01141 01143	470 350 300 270 230	103133 103137 02139 103141 02143	4/80 4/70 10/50 4/50 10/50
T-25	#12/14 x 5-5/8" #12/14 x 6-3/8" #12/14 x 8"	00173 00177 00181	600 1,000 500					96089 02177 02181	4 / 50 9 / 50 9 / 50

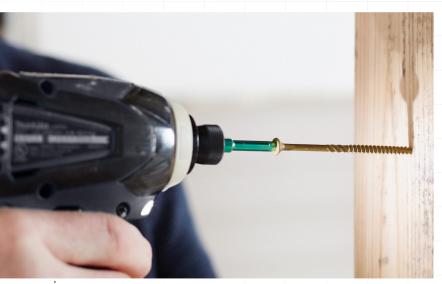

- Pro Packs need to be ordered in multiples of two
 2" bit included in Pro Packs. 1" bit with Handy Packs

APPLICATIONS:

- Multi-Purpose Framing
- Interior and Exterior Remodeling
- Porches and Patios
- Fencing
- Exterior Structures

RSS™ STRUCTURAL RUGGED STRUCTURAL SCREWS



EASY TO INSTALL LAG ALTERNATIVE

GRK's RSS™ Rugged Structural Screw is a structural fastener designed for ease of installation and the strongest of connections. RSS fasteners drive into most woods without the need for pre-drilling. The specially engineered design results in a low-effort installation, especially compared to conventional lag screws.


- Fast Bite Tip: Provides a fast start for one-step installation
- Zip-Tip™: Eliminates pre-drilling¹
- W-Cut™: Low torque, faster drive
- Precision Fit: Reduces wobble between RSS screws and GRK bits for improved productivity²
- Integrated Washer Head: Maximum clamping force
- **Star Drive Recess:** Zero stripping, with 6 points of contact
- **GRK Head Markings:** Easy identification of genuine GRK screws
- CEE Thread™: Enlarges hole to reduce splitting³
- Climatek™ Indoor/Outdoor Coating: ICC-ES AC257 code approved for use in treated lumber³
- **Code Approved:** For structural applications (see ESR-2442)⁴
- Some sizes also available in 305 and 316 grade
 Stainless Steel
 For interior / exterior use
- 1. Zip-Tip included on fasteners 2-1/2" and longer
- 2. Precision Fit included on 5/16" sizes only
- 3. CEE Thread included on fasteners 3-1/8" and longer
- For cedar, redwood and other naturally protected woods, GRK 305 and 316 stainless steel is recommended
- 5. ICC Code Approval for 1/4", 5/16", and 3/8" sizes only



	U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Pro Pack Part No.	Pro Pack Qty.	Handy Pack Part No.	Handy Pack MC Qty./ Screw Qty. (per EA)	Individually Tagged Part No.	Individually Tagged (Qty./Ctn.)
T-25	#10 x 2-1/2" #10 x 3-1/8"	10133 10137	1,000 800	11137	236	12133 12137	10 / 50 10 / 50		
T-25	1/4" x 1-1/2" 1/4" x 2" 1/4" x 2-1/2" 1/4" x 3-1/2" 1/4" x 3-1/8"	10151 10155 10157	1,000 800 700			12151 12155 12161	20 / 50 10 / 50 10 / 50	90305 90306	1/75 1/75
T-30	5/16" x 2-1/2" 5/16" x 2-3/4" 5/16" x 3-1/8" 5/16" x 3-1/2" 5/16" x 4" 5/16" x 5-1/8" 5/16" x 6"	10217 10219 10221 10223 10225 10231 10235	600 500 500 500 400 300 300	12219 12221 12223 12225 12231 12235	2/100 2/100 2/100 2/100 9/50 9/50	12217 14221 95307 14225 14235 14235	9 / 100 10 / 25 4 / 45 10 / 25 10 / 25 10 / 25	96001 90307 96005 96010 96015	1 / 50 1 / 50 1 / 50 1 / 50 1 / 40
T-40	3/8" x 3-1/8" 3/8" x 4" 3/8" x 6" 3/8" x 7-1/4" 3/8" x 8" 3/8" x 10" 3/8" x 12" 3/8" x 14-1/8" 3/8" x 16"	10273 10275 10281 10285 10287 10293 10299	400 400 300 200 300 300 300 300	12275 12281 12285 12287 12293 12299 12307 12311	9 / 50 2 / 50			96020 96025 96030	1 / 25 1 / 25 1 / 20

RSS™ JTS - JOIST AND TRUSS SCREW



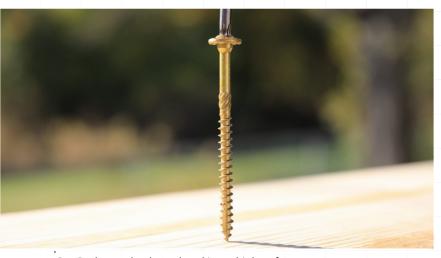

- Pro Packs need to be ordered in multiples of two
- 2" bit included in Pro Packs. 1" bit with Handy Packs

APPLICATIONS:

- Structural Decking
- Heavy Duty Framing
- LVL Fastening
- Ledger Boards
- Multi-ply
- Interior and Exterior Remodeling

DECK ELITEDECKING SCREWS



SPEED. QUALITY. ELEVATED CRAFTSMANSHIP

GRK's Deck Elite screws are designed for use in wood deck boards and provide a quick drive and clean finish. Deck Elite screws start immediately in wood with a smooth, fast drive to increase productivity on the job and the tan color of the screw provides an ideal finish.

- Tan Color: Provides an ideal finish
- Fast Bite Tip: Provides a fast start for one-step installation
- Zip-Tip™: Eliminates pre-drilling
- W-Cut™: Low torque, faster drive
- CEE Thread™: Enlarges hole to reduce splitting¹
- Star Drive Recess: Zero stripping, with 6 points of contact
- GRK Head Markings: Easy identification of genuine GRK screws
- Corrosion Resistant Coating: Resists rust and keeps decks looking new
- For use in wood deck boards, fencing, and deck rails, including pressure treated lumber²
- For interior / exterior use

- 1. CEE Thread included on fasteners 2" and longer
- For cedar, redwood and other naturally protected woods, GRK 305 and 316 stainless steel is recommended








U.S (Std.) Size	Contractor Packs	Contractor Packs	Pro Pack	Pro Pack
(Dia. x Length)	(XL buckets) Part No.	(XL buckets) Qty.	Part No.	Pail Qty.
#8 x 2	40803	1,080	10803	540
#9 x 1-5/8"	49159	1,080	19159	540
#9 x 2-1/2"	49212	800	19212	400
#9 x 3"	40903	700	10903	350

- Contractor Packs and Pro Packs need to be ordered in multiples of two
- 2" bit included in Pro Packs. 1" bit with Contractor Packs



- Deck Boards
- Fencing
- Deck Rails

FIN/TRIMTM FINISHING TRIM HEAD SCREWS

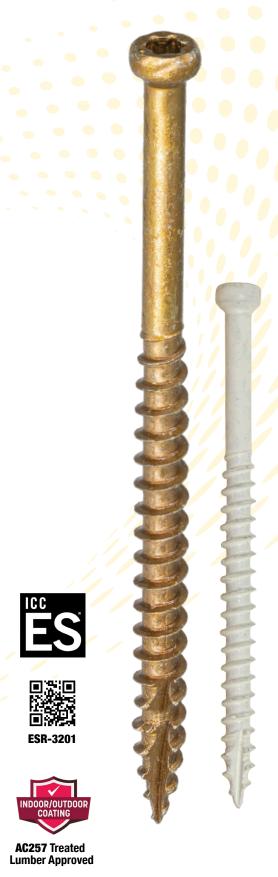

PROFESSIONAL FINISH, PROFESSIONAL LOOK

GRK's Fin/Trim™ screws are an excellent choice for most fine carpentry applications, as well as window extension jambs, joining cabinets and more. A combination of the smallest screw head available and code approved structural performance means the most secure, concealed fastening in the industry.

- Trim Head: Clean, finished look
- Star Drive Recess: Zero stripping, with 6 points of contact
- W-Cut™: Low torque, faster drive
- Zip-Tip™: Eliminates pre-drilling
- Climatek™ Indoor/Outdoor Coating: ICC-ES AC257 code approved for use in treated lumber¹
- **Code Approved:** For structural applications (see ESR-3201)
- Some sizes also available in 305 and 316 grade Stainless Steel
 For interior / exterior use

 For cedar, redwood and other naturally protected woods, GRK 305 and 316 stainless steel is recommended



U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack MC Qty./Screw Qty. (per EA)
#8 x 1-1/4" #8 x 1-1/2" #8 x 2" #8 x 2-1/2" #8 x 3-1/8"	15728 15730 15734	4,500 3,500 2,500	116724 116728 16730 115734	600 510 605 300	96055 119724 119728 119730 119734	6 / 100 6 / 100 6 / 100 6 / 100 6 / 100
#9 x 4" #9 x 5"					117760 117766	4 / 50 4 / 50



White Fin/Trim™				
#8 x 2"	16828	605	96060	4 / 100
#8 x 2-1/2""	16830	505	96065	4 / 100

- Pro Packs need to be ordered in multiples of two
 2" bit included in Pro Packs. 1" bit with Handy Packs



- Trim Work
- Cabinets
- Fine Carpentry


RT COMPOSITETM EXTERIOR TRIM SCREW



INSTALL RIGHT THE FIRST TIME

The RT Composite™ screw is a specially designed fastener for attaching composite and cellular PVC materials. Reverse threading under the head of the fastener helps the screw head disappear beneath the surface of the classic wood composite material while reducing or eliminating the dimple that is common in this substrate.

- Trim Head: Clean, finished look
- **Underhead Reverse Thread:** Reduces or eliminates mushrooming
- Star Drive Recess: Zero stripping, with 6 points of contact
- W-Cut™: Low torque, faster drive
- Zip-Tip™: Eliminates pre-drilling
- Climatek™ Indoor/Outdoor Coating: ICC-ES AC257 code approved for use in treated lumber¹
- Available in Climatek or White Cimatek coated finish
- Some sizes also available in 305 for interior / exterior use





ESR-3201




	U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack MC Qty./Screw Qty. (per EA)
T-10	#8 x 2" #8 x 2-1/2" #8 x 3-1/8"	16077 16079 16083	725 605 514	119077 119079 119083	6 / 100 6 / 100 6 / 100
T-15	#9 x 2-1/2" #9 x 3-1/8"	16101 16105	408 348		

White RT Composite™



#8 x 2"	16628	605	17628	20 / 100
#8 x 2-1/2"	16630	505	96075	4 / 100
#8 x 2-3/4"			17632	20 / 100
#8 x 3-1/8"			17634	10 / 100

- Pro Packs need to be ordered in multiples of two2" bit included in Pro Packs. 1" bit with Handy Packs

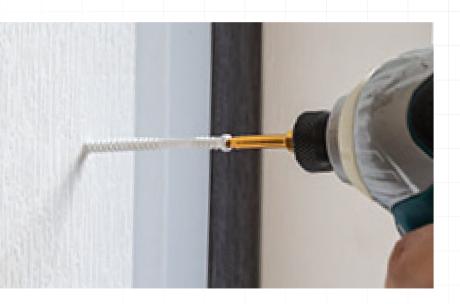

- Exterior Trim
- cPVC Deck Boards
- Hidden Fastening Systems

STAINLESS STEEL SCREWS

305 CORROSION RESISTANCE FOR HIGH MOISTURE ENVIRONMENTS

316 MARINE GRADE PROTECTION FOR SUPERIOR CORROSION RESISTANCE



GRK's line of stainless steel fasteners feature designs from R4, RSS, Fin/Trim, and RT Composite screws in corrosion and stain resistant material.

GRK recommends 305 stainless steels screws for applications that require superior corrosion resistance in exterior environments with high moisture content, such as docks, boardwalks, pools, and hot tubs. 305 stainless is also recommended for use with cedar, redwood and various other wood species that have higher acid content. 305 stainless steels screws are recommended for applications located more than 1 mile from the coast.

316 stainless steels screws are recommended for applications where extreme corrosion resistance is necessary, such as environments with high exposure to chlorides- such as de-icing salts- and in coastal applications within 1 mile of the coast. They are also suitable for use in chemically treated wood and naturally-protected wood such as cedar and redwood.

305 Stainless Steel

- For use within 1-15 miles of the coast
- For use in cedar, redwood, specialty hardwood, IPE, and Mangaris
- Corrosion resistance for wet environments
- Stain resistant in specialty wood

316 Stainless Steel



- For use within 1 mile of the coast
- Marine-Grade protection for superior corrosion resistance
- Superior Corrosion resistance for coastal environments
- Stain resistant in specialty wood





ESR-2442




ESR-3201





	U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack MC Qty./Screw Qty. (per EA)
	R4™ Screws: 305						
T-25	#10 x 2-1/2" #10 x 3-1/8"	25133 25137	2,500 1,500	61633 61637	240 210	61733 61737	4 / 80 4 / 70
	RSS™ Screws: 305	5					
T-30	5/16" x 3-1/8" 5/16" x 4" 5/16" x 5-1/8" 5/16" x 6"	30221 30225 30235	500 400 300			62225 132231	4 / 45 4 / 40
	RT COMPOSITE™	Trim Screw	s: 305				
T-10	#8 x 2" #8 x 2-1/2"			36077 36079	600 560	37079	20 / 100
T-15	#9 x 2-1/2"			36101	365		
	FIN / TRIM™ Scre	ws: 305					
T-10	#8 x 1-1/2" #8 x 2" #8 x 2-1/2" #8 x 3-1/8"			61728 61730 36734	510 420 385	37724 67728 67730 37734	20 / 100 6 / 100 6 / 100 10 / 100
T-15	#9 x 2-1/2"			36752	365		
	R4™ Screws: 316						
T-25	#10 x 2-1/2" #10 x 3-1/8"					137133 137147	4 / 80 4 / 70
	FIN / TRIM™ Scre	ws: 316					
T-10	#8 x 2-1/2"					147730	6 / 100





- Boardwalks
- Pool Decks
- Spas

LOW PROFILE CABINET™

CABINET SCREWS



QUICK AND SECURE INSTALLATION

GRK's Cabinet screws are designed for use in cabinet construction and installation. Cabinet screws are manufactured in a #8 gauge (4 mm) diameter for universal size convenience.

- Star Drive Recess: Zero stripping, with 6 points of contact
- Zip-Tip™: Eliminates pre-drilling¹
- W-Cut™: Low torque, faster drive
- Washer Head: Creates a flush, clean hold for a strong and secure installation
- Climatek™ Indoor/Outdoor Coating: ICC-ES AC257 code approved for use in treated lumber²
- White Cabinet Coating: Color matched for interior applications
- For interior / exterior3 use

- 1. Zip-Tip included on fasteners 1-1/4" and longer
- 2. For cedar, redwood, and other naturally-protected woods, GRK recommends stainless steel fasteners
- 3. White Cabinet Coating only suitable for interior use



U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack MC Qty./Screw Qty. (per EA)
#8 x 1"					96050	6 / 100
#8 x 1-1/4"	10069	4,000	100069	330	114069	6 / 100
#8 x 1-1/2"	10073	3,000	100073	330	114073	6 / 100
#8 x 1-3/4"	10075	2,000			12075	10 / 100
#8 x 2"	10077	2,000	96077	330	113077	4/100
#8 x 2-1/2"	10079	1,500	110079	330	113079	4 / 100
#8 x 2-3/4"					113081	4 / 100
#8 x 3-1/8"	10083	1,000	110083	270	114083	6 / 50

T-15

#8 x 1-1/4"		120680	6 / 80
#8 x 1-1/2"		120670	6 / 80
#8 x 2-1/2"		120660	6 / 80

• Pro Packs need to be ordered in multiples of two

White Low Profile™ Cabinet Screws

• 2" bit included in Pro Packs



- Cabinet Construction & Installations
- Trim & Moulding
- Light-Duty Framing

TOP STARTM ADJUSTABLE SHIM SCREWS



FOR PLUMB INSTALLATION OF WOODEN DOORS AND WINDOWS. NO MORE SHIMS!

GRK's adjustable Top Star™ shim screw is a screw within a screw that allows you to install wooden doors or windows without the use of shims. The quick and easy system reduces labor and allows for hassle free adjustment to ensure plumb installation.

The 4-point top sleeve provides a secure hold into the frame, while the GRK Star Drive bit is used to make the adjustments needed for a perfect, shim-free installation.

The Top Star's highly-engineered system can be used for installation of wooden doors, windows, insulation, paneling, wall-units, and cabinets.

- Recessed Star Drive: Zero stripping, with 6 points of contact
- **4-point 3/8" Diameter Threaded Sleeve** provides a secure hold in your wooden frame
- Micro-Adjustments allow for an absolute plumb installation
- Use with GRK's Top Star™ Crown and T-15 Star Bit System
- Zinc Plated finish for lasting durability
- For Shim Free Installation of wooden doors, windows, insulations, paneling, built-in wall units, and cabinets



U.S (Std.) Size	Pro Pack	Pro Pack	
(Dia. x Length)	Part No.	Pail Qty.	
3/8" x 3-1/8"	20161	100	

• Pro Packs need to be ordered in multiples of two

The Complete Top Star™ System Includes:

Bit


Crown


Threaded Sleeve













The Bit drives the Top Star™ into the material when the Crown and Bit are combined. Using the Bit without the Crown adjusts the distance.





The Threaded Sleeve moves independently from the Top Star™ unless locked by the Crown. When locked, the Top Star™ gets driven into the material.

Unlocked, the installed Top Star™is ready for leveling.



- Wooden Doors
- Windows
- Insulation

CALIBURN™ CONCRETE SCREW



HEAVY DUTY CONCRETE AND MASONRY FASTENER

Caliburn™ Concrete screws are professionally engineered fasteners with a patented thread design for ease of driving the screw into concrete and similar applications.

- Star Drive Recess: Zero stripping, with 6 points of contact
- Aggressive Heavy Duty Threads lock into concrete and can be removed/reinserted without screw damage
- Calibrun™ XL: washer head design for superior holding power
- Climatek™ Indoor/Outdoor Coating: ICC-ES AC257 code approved for use in treated lumber
- Ideal for use in anchoring to concrete or wood to concrete applications including basement framing and sheds

- Wood to Concrete Framing
- Electrical and Plumbing Fixtures
- Caliburn XL for Heavy Duty Concrete Anchoring





U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Handy Pack Part No.	Handy Pack MC Qty./Screw Qty. (per EA)
Caliburn™ XL				
19/64" x 2-3/4" 19/64" x 3-1/2"	55778	400	57774 57778	10 / 25 10 / 25
19/64" x 5"	55//6	400	57785	10 / 25





POWDER COATED HEAD FOR A CLEAN FINISHED LOOK

This screw has an integrated washer-head and is complemented by a rubber washer below the screw head. This feature also helps protect the washer from prolonged exposure to the sun for long lasting, secure siding installations.

- White Color, Low Profile Head produces a clean, finished look which is preferred for moldings, closet organizers, and metal siding
- Washer Head increases holding power
- Rubber Washer: seals drill hole from the elements
- W-Cut™ Thread Design tiny saw blades reduce torque by cutting through the material
- ZIP-TIP™ for easy starts and no pre-drilling
- For use in interior or exterior applications including metal siding, garage door trim, and even closet organizers. Not for use with treated lumber

APPLICATIONS:

- Metal Siding
- Garage Door Trim
- Closet Organizers





U.S (Std.) Size	Bulk	Bulk
(Dia. x Length)	Part No.	Box Qty.
#9 x 1-1/2"	40090	3000

• 1" bit included in Handy Packs

STAR DRIVE BITS CROWN / BIT



Bit Size	Bit Color	Fits	Bulk Part No.	Bulk Box Qty.	Carded Part No.	Carded Qty/per pack
T-10 2" T-10 3"	Yellow Yellow	Trim™ Head #8			187419 87421	2 2
T-15 2" T-15 3"	Red Red	R4™ Screw #6 & 8 Trim™ Head #9 Cabinet™ Screw			187427 87429	2 2
T-20 2"	Purple				187435	2
T-25 2" T-25 3"	Green Green	R4™ #9,10 &12 RSS™ #10 & 1/4" MSS™ #9	86443	25	187443 87445	2 2
T-30 2" T-30 3"	Black Black	RSS™ Structural Screw 5/16" Caliburn™ & Caliburn PH™	86451	25	187451 87453	2 2
T-40 2"	Blue	Caliburn XL™ Screws RSS™ Structural Screw 3/8"			187459	2





COMING SOON IN 2024


BLACK RSS™ STRUCTURAL RUGGED STRUCTURAL SCREWS

RSS™ Black Structural Screws are designed for outdoor and decking applications. The black coating provides a bold finish for structural connections.



AUGERBOLT™ THROUGH BOLT FASTENING

AugerBolt simplifies the installation process of through bolts by combining the drilling and install steps and eliminating loose components.






DECK ELITE ANGLEPRO™

The AnglePro Hidden Fastening System provides a premium aesthetic by eliminating the visiability of screws. The AnglePro guides Deck Elite Fasteners precisely between the gaps of each board leaving a perfect finish.



DECK ELITEHIDDEN FASTENERS

For use with the Deck Elite AnglePro. Robust clamping threads provide 2 times the holding strength. Available in stainless steel and coated finishes.

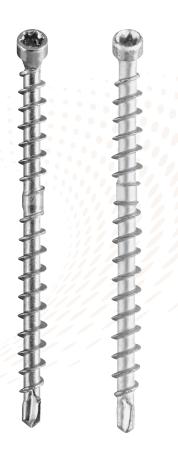

Tapcon® is the #1 recognized screw anchor brand in the industry. For decades, Tapcon has helped professionals get their concrete anchoring jobs done right the first time, every time.

The blue, corrosion-resistant coating enables our anchors to withstand the harshest conditions, and their unmatched performance (30% less torque and 20% more holding power) in concrete, block and brick applications make them an excellent alternative to expansion anchors, plugs and lag shields.

For quality, strength, and ease of installation, nobody matches the confidence pros get from using the original true blue screw.





TAPCON® CONCRETE SCREW ANCHORS



NOTHING ANCHORS LIKE A TAPCON.

Tapcon concrete anchors deliver the ease of use, superior precision, and unparalleled performance that professionals demand.

- **Eliminate bit slips** and increase productivity with star recess on flat head Tapcon anchors
- Resist head snaps and spin outs with under-head ribs on hex head Tapcon anchors
- **Superior holding strength** for confidence in a job done right
- **Corrosion resistant**, long lasting performance with Climaseal™ coating
- **WERCS threadform** allows for easy installation across a variety of masonry substrates
- **ICC-ES** recognized for use in concrete and masonry (ESR-2202 & ESR-1671)

APPLICATIONS:

Star Head

- Furring Strips
- Wood Framing
- Window Frames

Hex Head

Electrical Boxes





U.S (Std.) Size (Dia. x Length)	Bucket Part No.	Bucket Qty.	Lg. Clam Part No.	Lg. Clam Qty.	Med. Pack Part No.	Med. Pack Qty.	Small Pack Part No.	Small Pack Qty.
STAR HEAD								
3/16" x 1-1/4" 3/16" x 1-3/4" 3/16" x 2-1/4" 3/16" x 2-3/4" 3/16" x 3-1/4" 1/4" x 1-3/4" 1/4" x 2-1/4" 1/4" x 2-3/4" 1/4" x 3-3/4"	28550 28555 28560 28565 28575 28585	225 225 225 225 225 225	28350 28355 28360 28365 28307 28375 28380 28385 28395	75 75 75 75 75 75 75 75 75	28250 28255 28260 28265 28275 28280 28285 28390	25 25 25 25 25 25 25 25 25	28150 28155 28160 28165 28107 28175 28180 28185 28295	8 8 8 8 8 8
1/4" x 4"			28304	50	28397	25	28204	8
HEX HEAD 3/16" x 1-1/4" 3/16" x 1-3/4" 3/16" x 2-3/4" 1/4" x 1-1/4" 1/4" x 1-3/4" 1/4" x 2-3/4" 1/4" x 2-3/4" 1/4" x 3-3/4" 1/4" x 3-3/4" 1/4" x 4"	24515 24520 24525 24530 24501	225 225 225 150 150	24300 24305 24310 24315 24320 24325 24330 24301 24340	75 75 75 75 75 75 75 75	24200 24205 24210 24215 24220 24225 24230 24335 24345	25 25 25 25 25 25 25 25 25 25	24100 24105 24110 24115 24120 24125 24130 24101	8 8 8 8 8 8
3/16" x 1-3/4" 3/16" x 2-1/4" 3/16" x 2-3/4" 1/4" x 2-3/4" 1/4" x 3-1/4" 1/4" x 3-3/4"	IELD TAPCO	N	28371 28372 28367 24388 24391 24392	75 75 75 75 75 75	28267 24288	25 25	28171 28172 28167 24188	8 8 8 8
410 STAINLESS S	TEEL TAPCO	N						
3/16" x 1-3/4" 3/16" x 2-3/4" 1/4" x 1-3/4" 1/4" x 2-3/4"							26155 26165 26120 26130	8 8 8 8
MAXI-SET TAPCO	N							
1/4" x 2-1/4" 1/4" x 2-1/4"			24326 24323	50 50				
STORM GUARD								
1/4" x 2-1/4"					35235	25		

 $[\]bullet$ Pre-drill bit included in Star Head and Hex Head packs of 75 quantity and larger

TAPCON® CONCRETE SCREW ANCHORS

U.S (Std.) Size (Dia. x Length)	Bucket Part No.	Bucket Qty.	Lg. Clam Part No.	Lg. Clam Qty.	Med. Pack Part No.	Med. Pack Qty.	Small Pack Part No.	Small Pack Qty.
TAPCON DRILL BITS								
5/32" x 3-1/2"							11256	1
5/32" x 4-1/2"							11247	1
5/32" x 5-1/2"					11249	4	11363	1
3/16" x 3-1/2"							11257	1
3/16" x 4-1/2"							11248	1
3/16" x 5-1/2"					11250	4	11362	1
5/32" x 7" SDS							11492	1
3/16" x 7" SDS							11491	1
1/4" x 7" SDS							11493	1
3/8" x 8" SDS							11494	1
1/2" x 10" SDS							11495	1
TAPCON PRO INS	TALLATION	KIT						
Tapcon Pro Install Tool							79013	1

TAPCON+®HEAVY DUTY CONCRETE SCREW ANCHORS



STRONGER. FASTER. EASIER.

Tapcon+ unmatched performance in concrete, block and brick applications make them an excellent alternative to expansion anchors, plugs, lag shields and have a blue corrosion resistant coating that enables them to withstand the harshest conditions. That's why when pros look for quality, strength and ease of installation, they choose Tapcon.

- **ICC-ES Approved** for use in uncracked & cracked concrete and seismic conditions (ESR-3699)
- Heavy-Duty Holding Power in all concrete conditions
- **Flexibility:** to install closer to the edge & closer together with confidence
- Precision Fit: A long-standing reputation for quality, strength, and ease of installation from industry professionals









U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.	Pro Pack Qty.	Handy Pack Part No.	Pro Pack Pail Qty.	Small Pack Part No.	Small Pack Qty.
5/16" x 2-1/4"			24292	15	24192	4
5/16" x 3"			24293	15	24193	4
3/8" x 1-3/4"	11440	10			50440	2
3/8" x 2-1/4"	11441	10			50441	2
3/8" x 3"	11413	10			50403	2
3/8" x 4"	11414	10			50404	2
3/8" x 5"					50445	2
3/8" x 6"					50446	2
1/2" x 3"	11447	10			50447	2
1/2" x 4"	11420	10			50408	2
1/2" x 5"	11449	10			50449	2
1/2" x 6"	11421	10			50426	2



- Sill Plates
- Post Cap Connector
- Ledger Board
- Heavy Equipment
- Industrial Racking/Shelving
- Modular Walls
- Machinery

Trubolt. WEDGE ANCHORS HEAVY DUTY CONCRETE ANCHORS



MAXIMUM STRENGTH FOR HEAVY-DUTY CONCRETE ANCHORING

Trubolt Wedge Anchors offer maximum strength and ultimate flexibility making them the PRO choice for heavy-duty anchoring. This wedge anchor features a high-strength body that is built to resist tension and shear loads.

- **ICC-ES Approved** for use in uncracked concrete (ICC-ES-ESR-2251)
- Heavy-Duty Holding Power in concrete conditions
- Fully Threaded Anchor Design for application versatility
- Stainless Steel Clip provides extra corrosion protection
- A long standing reputation for quality, strength, and ease of installation from industry professionals







U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.	Pro Pack Qty.	Handy Pack Part No.	Handy Pack Pail Qty.	Poly-Bag Part No.	Poly-Bag Qty.
1/4" x 2-1/4"			12377	25	50080	1
3/8" x 2-1/4"	12367	50	12015	15	50081	1
3/8" x 3"	03014	50			50082	1
3/8" x 3-3/4"	12370	50	12016	15	50083	1
3/8" x 5"			12022	15	50084	1
1/2" x 2-3/4"					50085	1
1/2" x 3-3/4"	12371	25	12017	10	50181	1
1/2" x 4-1/4"	12372	25	12020	10	50086	1
1/2" x 5-1/2"	12373	25	12019	10	50087	1
1/2" x 7"					50088	1
5/8" x 5"	12310	10			50089	1
5/8" x 6"	03041	10				
5/8" x 7"	03044	10			51030	1
5/8" x 8-1/2"					50305	1
3/4" x 5-1/2"	02992	10			51001	1
HOT-DIPPED GALV	VANIZED					
1/2" x 5-1/2"HDG			12021	10	50303	1
1/2" x 7" HDG	12029	10			50307	1
5/8" x 6" HDG	03555	10				



- Machinery
- Sill plate installation

RED HEAD® CONCRETE ANCHORS

CONCRETE ANCHORS



VERSATILE ANCHORING SOLUTIONS FOR CONCRETE & BUILDING

Red Head can help you get any job done right, from heavy-duty ceiling applications to light-duty work in block and brick.

Our sleeve anchor is our most versatile anchor with the ability to fasten in block, brick, masonry, and solid concrete.

For a lighter duty project, Poly-Set and Hammer-Set are great choices for block, brick and concrete and allow for a quick and easy installation. For heavy-duty overhead applications, use our Drop-In anchors. Use the complete family of anchors and SDS bits to ensure precise hole depth and diameter when using our anchors.





U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.	Pro Pack Qty.	Handy Pack Part No.	Handy Pack Pail Qty.	Poly-Bag Part No.	Poly-Bag Qty.
SLEEVE ANCHORS						
1/4" x 2-1/4" Acorn Hd 1/4" x 2-1/4" Threshold Hd 1/4" x 3-1/8" Flat Hd 5/16" x 1-1/2" Hex Hd 5/16" x 2-1/2" Hex Hd 3/8" x 1-7/8" Hex Hd 3/8" x 3" Hex Hd 1/2" x 2-1/4" Hex Hd 1/2" x 4" Hex Hd 5/8" x 4-1/4" Hex Hd 5/8" x 6" Hex Hd	11281 11283 11285	50 25 25	11013 11014 11018	15 10 10	50122 50123 50121 50112 50113 50114 50115 50116 50117 50118 50119 50120	1 1 1 1 1 1 1 1 1 1
HAMMER-SET ANCHORS						
1/4" x 1" 1/4" x 1-1/2" 1/4" x 2" 1/4" x 3"	35300 35303 35305 35207	75 50 50 25	35200 35203 35205	25 15 15		
DROP-IN ANCHORS						
3/8" Anchor 1/2" Anchor 3/8" Setting Tool 1/2" Setting Tool	01891	50			50125 50126 07499 07501	1 1 1 1



- Conduit Clips
- Drywall tracks
- Curtain rods
- Shelving
- Shelf Ledgers
- Racking
- Secure Transformers
- Light Fixtures

A7+ ADHESIVE ANCHORS HIGH STRENGTH ADHESIVE ANCHORING SOLUTION



CONCRETE ANCHORING AND REINFORCING SOLUTIONS

For jobs requiring versatility, high performance, and efficiency, Red Head's A7+ Concrete Adhesive Anchor is the one anchoring solution that does it all. A7+ takes only 45 minutes to fully cure and can be used in challenging conditions like cold temperatures and water-filled holes. A7+ is also ICC-ES approved for cracked concrete and seismic building code requirements.

- **ICC-ES approved** For use in cracked concrete and seismic conditions (ICC-ES-ESR-3903)
- Quick 45 minute cure time for fast installation
- **Easy dispensing** with a standard caulk gun, eliminating the need for any special tools
- Increased productivity with a successful cure in saturation concrete and water-filled holes
- A long-standing reputation for quality, strength, and ease of installation from industry professionals.





ESR-390



ESR-395



A7+ can also be used in any standard mediumduty caulk gun, eliminating the inconvenience of needing a special dispensing tool. Combine the simplicity of dispensing with the quick-curing product, and installation is fast, easy, and doesn't take time away from the rest of the project. The A7+ concrete adhesive anchoring solution is a high-performing anchor that rivals other products on the market in both price and features. This high performance and efficiency allows for less time on the job and more productivity.

Providing code approved performance and a fast 45 minute cure time, Red Head A7+ is the concrete anchoring adhesive that delivers.

U.S (Std.) Size (Dia. x Length)	Part No.	Qty.
9.5 oz. Cartridge	07111	1



APPLICATIONS:

For use in:

- Concrete
- · Grout-filled and hollow brick
- Clay tile

RAMSET® TOOLS PINS + LOADS















FSR-1790



ESR-2690

DURABLE. STURDY. POWERFUL.

From concrete to steel, Ramset has the tool to help you get the job done on time. Ramset is designed with speed and productivity in mind. With innovative solutions we provide you with the best anchoring experience.

- Powder actuated tools for concrete or steel
- Drives jobsite speed through quick and efficient fastening
- Market leading tool innovations help you get the job done right
- The Powder Actuated Tool choice for PROs

Item/Tool	Part No.	Qty.
Cobra+ .27 Caliber Semi-Automatic Powder Actuated Tool	16942	1
MasterShot .22 Caliber Single-Shot <i>Powder Actuated Tool</i>	40088	1
TriggerShot .22 Caliber Single-Shot Powder Actuated Tool	40066	1
HammerShot .22 Caliber Single-Shot Powder Actuated Tool	00022	1



U.S (Std.) Size (Dia. x Length)			Pack t No.	Pro Pack Qty.		Handy Pack Part No.		Handy Pack Pail Qty.	
DRIVE PI	NS								
.300 x 1/2" .300 x 3/4" .300 x 1" .300 x 1-1/2" .300 x 2" .300 x 2-1/2" .300 x 3"			06171 00747 00759 00774 00780 00786 00794		100 100 100 100 100 100 100 00787				25
DRIVE PI	S WITH WAS	SHERS							
.300 x 1" .300 x 1-1 .300 x 1-1 .300 x 2" .300 x 2-1 .300 x 3"	/4"		00797 00803 00800 00806 00809 07886	100 100 100 100 100 100		00804 00810 07887		25 15 15	
RAMGUA	RD DRIVE PII	NS FOR USE	IN TREATED L	UMBER					
.300 x 2-1	.300 x 2-1/2" .300 x 2-1/2" with Washers .300 x 3" with Washers		09167 09173 09176	100 100 100					
Caliber	Color	Туре	Strip Load Part No.	Qty.	Single Shot Box Pt. #	Single Shot Box Qty.	Sing Blis	gle Shot ter pt.#	Single Shot Blister Qty.
.22 .22 .22 .27 .27 .27	Brown Green Yellow Green Yellow Red	Powder Powder Powder Strip Strip Strip	00652 00667 00682	100 100 100	00594 00601 00607	100 100 100			



- 2 x 4 framing
- Furring strips
- Attaching electrical boxes

TE S

Teks was established in 1967 with the introduction of the original self-drilling screw. Since then, we have continued to innovate and provide value-added metal fastening solutions to the construction market.

We take pride in our commitment to operational excellence, superior service and new product development. That has guided the company through decades of growth by meeting the ever-changing needs of the residential/renovation construction industry. Focusing on the needs of our end-users enables us to optimize our product offering and service based on their requirements.



TEKS® METAL FASTENERS ROOFING SCREWS



TEKS ROOFING SCREWS

Teks Roofing Screws provide secure metal to metal fastening with strong holding power, without need to pre-drill.

- The **self-sealing neoprene washer** provides a waterproof seal.
- The premium finish provides exceptional corrosion resistance in harsh outdoor environments.

Teks colored roofing screws are designed for fastening colored metal roofing and siding panels for a perfect color match that provides a clean look and quality finish.

- Full head paint coverage
- Incorporates durable and long lasting liquid paint
- High grade steel
- Weather tight seal

The Elite screws are trusted for their superior drilling performance, fast installation and holding power – making them the go-to screw for pros who want unparalleled performance and superior results.

- Maxiseal™ Washer: Washer attached directly to head of screw for better waterproofing even at an angle.
- **Shankguard™:** Improved under-roof corrosion resistance.
- Hi-grip^{TM*} Threading: Prevents water entry and over-drilling
 - *Not available on 1" screws
- Climacoat Coating: No streaking or rust from corrosion
- Comes in drill point and sharp point



U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack Qty.					
TEKS® ROOFING SCREWS									
HEX WASHER HEAD / SHARP POINT (METAL TO WOOD)									
9 x 1"	21401	360	21400	120					
9 x 1-1/2"	21406	400	21404	100					
HEX WASHER HEAD / DRILL POI	NT (METAL TO METAL)								
12 x 3/4"			21408	90					
12 x 1"	21418	400	21412	80					
12 x 1-1/2"	21422	300	21419	75					
12 x 3"			21417	40					
TEKS® COLORED ROOFING	SCREWS (SHARP POI	NT)							
9 x 1-1/2" (Green)			21414	100					
9 x 1-1/2" (White)			21424	100					
TEKS® ELITE PREMIUM ROC	FING SCREWS								
SHARP POINT									
10 x 1-1/2"	21453	300	21452	100					
12 x 1"	21450	120							
DRILL POINT	DRILL POINT								
12 x 1"			21470	80					
12 x 1-1/2"	21473	225	21472	75					

APPLICATIONS





ROOFING SCREWS:

- Ideal for attaching metal roofing and siding
- Sharp point for use in metal to wood applications
- Drill point for use in metal to metal applications

TEKS® METAL FASTENERS METAL TO METAL SCREWS



SECURELY FASTEN METAL WITH SPEED

Teks® fasteners are offered in sharp and drill points that easily penetrate light to heavy gauge metal and wood. Professionals no longer have to struggle when engaging their work surface.

Teks® fasteners are offered in a wide variety of head styles to meet professionals installation needs. No tool slippage or cam-outs even with old sockets and worn bits. Professionals can drill, tap, and fasten – all in one motion.

- Drive surface and recess: Reduces cam-outs to prevent slipping during installation
- **Drill Points:** Self-drills through light to heavy gauge metal with ease
- **Sharp Points:** Self-pierces into light gauge metal to start drilling faster
- **Self-Tapping Threads:** Taps their own threads to provide less effort when fastening into metal
- Corrosion Resistant Finish: Protects the job's appearance with long lasting coating

APPLICATIONS



METAL TO METAL:

- Attaching HVAC
- Electrical
- Metal framing
- General metal to metal applications



U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack Qty.					
TEKS® METAL TO METAL SCREWS									
HEX WASHER HEAD / DRILL POINT (METAL TO METAL)									
8 x 1/2"			21308	280					
8 x 3/4"			21312	180					
8 x 1"			21316	170					
10 x 5/8"			21396	170					
10 x 3/4"	21322	450	21320	150					
10 x 1"			21328	140					
10 x 1-1/2"			21332	90					
12 x 3/4"			21336	120					
12 x 1"	21341	400	21340	100					
12 x 1-1/2"			21344	80					
12 x 2"			21348	60					
12/14 x 2"			21820	60					
14 x 3/4"			21349	100					
14 x 1"			21351	60					
14 x 1-1/2"	24250	120	21352	50					
14 x 2-1/2"	21358	120	21356	30					
HEX WASHER HEAD / SHARP POI	NT (METAL TO METAL	.)							
6 x 1/2"			21301	320					
8 x 1-1/2"			21318	85					
10 x 3/4"			21327	150					
PAN HEAD / DRILL POINT (META	L TO METAL)								
8 x 1/2"			21360	300					
8 x 3/4"			21364	240					
10 x 3/4"			21372	170					
PAN HEAD / SHARP POINT (MET.	AL TO METAL)								
6 x 1/2"			21359	300					
PANCAKE HEAD / DRILL POINT (METAL TO METAL)								
10 x 5/8"			21376	190					

TEKS® METAL FASTENERS LATH SCREWS AND WOOD TO METAL SCREWS



Teks Lath Screws provide secure metal-to-metal and metal-to-wood fastening with strong holding power, without the need to pre-drill.

- Lath head: Lath Screws feature a low-profile head for a semi-flush finish for virtually any application
- Self-tapping threads: Ensure strong holding power
- **Zinc plated finish:** Protects the job's appearance.

Teks Wood-to-Metal screws help you secure wood to metal without pre-drilling. The special wings ream a hole in the wood to prevent thread engagement during drilling; these wings break away when self-tapping into metal providing a secure hold.

- **Precision point with wings:** Designed to drill, tap, and fasten all in one motion
- **Climacoat premium coating:** Provides a long life finish for exterior applications
- High performance drive: Surfaces reduce camouts to penetrate surface the first time for easy installation
- Wings: Ream a hole in the wood to prevent thread engagement and break away when self-tapping into metal

APPLICATIONS



LATH SCREWS:

- Attaching lath to wood or steel studs for stucco/ plaster applications
- Attaching pre-drilled metal brackets to post-framing
- Any general applications requiring a wide, low-profile head



WOOD TO METAL:

- Attaching roof/subfloor decking
- Attaching trailer beds to frame
- Attaching wood headers to steel frame



U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack Qty.				
TEKS® LATH SCREWS								
MODIFIED TRUSS HEAD / SHARP POINT (METAL OR LATH TO WOOD)								
8 x 1/2"			21500	260				
8 x 3/4"	21506	600	21504	200				
8 x 1"	21510	510	21508	170				
8 x 1-1/4"			21512	140				
8 x 1-5/8"			21516	120				
8 x 2"			21518	100				
8 x 2-1/2"			21519	80				
MODIFIED TRUSS HEAD / DR	LL POINT (LATH OR MET	AL TO METAL)						
8 x 1/2"			21520	260				
8 x 3/4"	21525	600	21524	200				
8 x 1"	21530	510	21528	170				
8 x 1-1/4"			21532	140				
8 x 1-5/8"			21536	120				
8 x 2"			21538	100				
8 x 2-1/2"			21540	80				
TEKS® WOOD TO METAL	SCREWS							
PHILLIPS FLAT HEAD / DRILL	POINT W/REAMER WING	(WOOD TO METAL)						
1/4-20 x 3"			21378	40				
10 x 1-7/16"	21381	300	21380	100				
12 x 2-3/4"	21386	200	21384	40				

BACKER-ON® ROCK-ON® CEMENT BOARD SCREWS



CEMENT BOARDS FASTENED RIGHT

Backer-On® cement screws are designed for attaching HardieBacker® cement board and Rock-On® cement board screws are designed for attaching Durock® cement board to wood or light gauge steel studs. The patented serrated head design countersinks for a flush finish even at angle, providing a smooth surface for tile installation. The T-25 Star Drive recess provides Stikfit™ for one-handed installation. Climacoat corrosion resistant finish prevents rust from bleeding into grout. Making it perfect for use in high moisture areas such as bathrooms and kitchens.

Backer-On® and Rock-On® cement board screws comply with ANSI standards for cement board installation as specified by cement board manufacturers. Cement board manufacturers require ANSI compliance in order to remain eligible for warranty.

- **Serrated Head:** Designed to drive flush even at an angle
- Star Drive with T-25 Bit: Provides Stikfit™ for easy one-handed installation and eliminates cam-outs
- **Hi-Lo / Single Threads:** Starts quickly and drives smooth in cement boards
- **Sharp Points:** Offers immediate pick-up and eliminates the need to pre-drill
- **Climacoat Finish:** Corrosion resistant for preventing rust from bleeding into tile



U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack Ctn. Size/Qty.				
BACKER-ON® SCREWS								
#9 x 1-1/4" #9 x 1-5/8" #9 x 2-1/4"	23406 23416	750 575	23401 23411 23421	M/185 M/140 M/100				
ROCK-ON® SCREWS								
#9 x 1-1/4" #9 x 1-5/8" #9 x 2-1/4"	23306 23316	750 575	23301 23311 23321	M/185 M/140 M/100				
BACKER-ON® ROCK-ON® SO	BACKER-ON® ROCK-ON® SCREWS							
#9 x 1-1/4" #9 x 1-5/8" #9 x 2-1/4"	23505 23515	750 575	23500 23510 23520	M/185 M/140 M/100				



APPLICATIONS:

- Attaching fiber cement board to wood or light gauge steel framing
- Attaching fiberglass reinforced cement board to wood or light gauge steel framing

Pro Tip: Standard roofing nails, dry wall screws, and other alternatives to cement board screws are typically not specified by cement board manufacturers and not ANSI compliant.

E-Z ANCOR® DRYWALL ANCORS



E-Z Ancor® Twist-N-Lock



E-Z Ancor® Stud Solver



E-Z Ancor® Toggle Lock



E-Z Ancor® Heavy Duty Toggle Lock

EASY TO INSTALL WITH STRONG HOLDING POWER

E-Z Ancors® are ideal for hanging accessories, signs, fixtures, and shelving units on drywall. Designed to self-drill flush into drywall for easy and fast installations. No pre-drilling necessary. The threads are formed to provide increased stability and a secure hold.

E-Z Ancor® Twist-N-Lock is designed for light to medium-duty applications. The audible click provides confirmation of the anchor being firmly set. Threads cut deeply to resist pull-out and provide a secure hold.

E-Z Ancor® Stud Solver is designed for light to medium-duty applications. Installs anywhere on a wall, even if you hit a wood stud behind the drywall. Threads cut deeply to resist pull-out and provide a secure hold.

E-Z Ancor® **Toggle Lock** is designed for heavy-duty drywall applications. The superior 1-piece assembly prevents losing extra pieces behind the wall. The toggle bar swivels easily during assembly to provide a secure hold.

Buildex® Stucco Anchor is designed for light to medium-duty applications in stucco. The zinc plating is designed to be durable in exterior and interior applications. Kits include a drill bit for installation.

E-Z Ancor® Heavy Duty Drywall Toggle Anchors are designed for medium to heavy-duty hollow wall applications. The metal toggle bar clamps the wall providing an even and secure hold. The flexible plastic straps allow the toggle bar to swivel for easy installation.

- No Pre-Drilling: Screws directly into drywall with a Phillips screwdriver
- Self-Piercing Point: Positions anchor in desired location without slipping and starts self-drilling faster
- Clean Finish: Installs flush into drywall
- **Strong Holding Power:** Prevents loose connections and items from wobbling



U.S (Std.) Size (Max Load)	Lg. Pack Part No.	Lg. Pack Qty.	Med. Pack Part No.	Med Pack Qty.	Small Pack Part No.	Small Pack Qty.	
E-Z ANCOR TWIST-N-LOCK ANCHORS							
50 lbs. 75 lbs.	25350 25310	50 50	25200 25210	25 20	11353 11364	6 4	
E-Z ANCOR STUD SOLVER A	NCHORS						
40 lbs. 50 lbs.	25325 25316	50 50	25225 25216	25 20	25125 29503	4 5	
E-Z ANCOR / E-Z TOGGLE LO	OCK ANCHOR						
100 lbs.	25320	25	25220	10	10006	2	
BUILDEX® STUCCO ANCHO	RS						
3/16"x 1-1/2"Hex Hd 3/16"x 1-1/2"Flat Hd 1/4"x 2-7/8"			31810 31820 31840	25 25 25	31710 31720 31740	4 4 4	
E-Z ANCOR HEAVY DUTY TOGGLE ANCOR							
110 lbs 3/16" Bolt 120 lbs 1/4" Bolt			25730 25731	25 25	25720 25721	10 10	

E-Z ANCOR CONTRACTOR PACKS								
U.S (Std.) Size (Max Load)	Contractor Pack Qty.							
E-Z ANCOR CONTRACTOR TWIST-N-	LOCK ANCHORS							
75 lbs.	25410	100						
E-Z ANCOR CONTRACTOR STUD SOI	E-Z ANCOR CONTRACTOR STUD SOLVER ANCHORS							
50 lbs.	25616	100						
E-Z ANCOR TWIST-N-LOCK AND STUD SOLVER ANCHORS COMBO								
50 lbs./75 lbs.	25600	25/25						

Warning: Do not use Twist-N-Lock or Stud Solver anchors for ceiling applications. Do not use for mounting televisions. Load ratings are for items hung flush to the wall. Load ratings decrease when hanging items that project from the wall.



APPLICATIONS:

For Mounting:

- Picture Frames
- Shelving
- Mounting Brackets
- Hooks
- And more

FASTENER APPLICATION INFORMATION

ITW's Residential and Renovation Construction product lines are used in a variety of fastening applications. When choosing a fastener for a particular application, consideration needs to be made regarding its environment, particularly when exposed to moisture, treated lumber, dissimilar materials, and/or marine environments. These coating and material guidelines are not exhaustive and individual application conditions need to be considered prior to design or use.

For more assistance, please contact Customer Service at (877) 489-2726.

ENVIRONMENTAL CONDITION QUICK REFERENCE¹

Product Line	Coating	Interior ²	Exterior, Protected ³	Exterior, Exposed ⁴	Freshwater/ Coastal ⁵	Marine/High Chloride ⁶
	Brite	Х				
	Electrogalvanization	Х				
	Hot Dip Galvanization	Х	Х	Х		
Paslode	Mechanical Galvanization	Х	Х	Х		
	HDG PLUS	Х	Х	Х		
	304 Stainless Steel	Х	Х	Х	Х	
	Aluminum	Х	Х	Х		
	Blue Climaseal	Х	Х			
	White Ultrashield	Х	Х	Х		
Tapcon	Silver Ultrashield	Х	Х	Х		
	410 Stainless Plus Ultrashield	Х	х	Х		
Red Head	Zinc Electroplate	Х				
кеа неаа	Hot Dip Galvanization	Х	Х	Х		
Ramset	Zinc Electroplate	Х				
Kamset	Ramguard HDG	Х	Х	Х		
	Zinc Electroplate	Х				
	Climatek	Х	Х	Х		
GRK	White Climatek	Х	Х	Х		
GKK	Deck Elite	Х	Х	Х		
	305 Stainless Steel	Х	Х	Х	Х	
	316 Stainless Steel	Х	Х	Х	Х	х
Rock-On/Backer-On	Climacoat	Х				
TEKS	Zinc Electroplate	Х				
	Gray Spex	Х	Х			
	TEKS Climacoat	Х	Х	Х		

- 1. For cases when the environmental condition is not known, it is recommended to conservatively choose a fastener with a higher level of corrosion resistance.
- 2. Dry, interior conditions, with minimal direct moisture contact.
- 3. Outdoor conditions that result in intermittent water exposure. Applications are either covered by features such as roofing or lap siding or temporarily exposed to precipitation but allow for quick drainage.
- 4. Outdoor conditions that result in exposure to the full effects of weather.
- 5. Conditions where fasteners are regularly exposed to freshwater, or in regions of high humidity, such as being within 1 and 15 miles of a coast.
- 6. Within one (1) mile of seawater coast or direct exposure to chlorides, such as de-icing salts.

WOOD APPLICATION QUICK REFERENCE

Product Line	Coating	Untreated Wood ¹	Chemically Treated Wood, Above Ground ²	Chemically Treated Wood, Ground Contact³	Naturally Protected Wood ⁴
	Brite	Х			
	Electrogalvanization	Х			
	Hot Dip Galvanization	Х	Х	Х	X ⁵
Paslode	Mechanical Galvanization	х	х	Х	х
	HDG PLUS	Х	Х	Х	Х
	304 Stainless Steel	Х	Х	Х	X
	Aluminum	Х			X
	Blue Climaseal	Х			
	White Ultrashield	х			
Tapcon	Silver Ultrashield	Х			
	410 Stainless Plus Ultrashield	х			
Red Head	Zinc Electroplate	Х			
кеа неаа	Hot Dip Galvanization	Х	Х	Х	X ⁵
Ramset	Zinc Electroplate	Х			
Kamset	Ramguard HDG	Х	Х	Х	X ⁵
	Zinc Electroplate	Х			
	Climatek	Х	X6	X ₆	
GRK	White Climatek	Х	X ₆	X ₆	
GKK	Deck Elite	Х	Х	Х	
	305 Stainless Steel	Х	Х	Х	Х
	316 Stainless Steel	Х	X	X	X
Rock-On/Backer-On	Climacoat	X			
	Zinc Electroplate	Х			
TEKS	Gray Spex	Х			
	TEKS Climacoat	Х	X		

- $1. \quad \text{Sawn or processed lumber that has not undergone chemical treatment.} \\$
- 2. Wood with preservative treatment such as ACQ or CA, with above ground contact according to AWPA Use Category UC3A.
- 3. Wood with preservative treatment such as ACQ or CA, with ground contact according to AWPA Use Category UC4A or ICC-ES AC257 Exposure Condition 3.
- 4. Wood species such as cedar or redwood that are naturally protected from environmental decay.
- 5. Interaction between naturally protected woods and HDG coatings may result in staining.
- 6. See ICC-ES ESR-3201 or ESR-2442 for details on approved preservative types.

LIABILITY AND WARRANTIES

Mechanical Fastening Warranty: (Includes GRK Fasteners, Tapcon, Red Head, Ramset, Teks, Rock-On, Backer-On, and E-Z Ancor). ITW Brands warrants that these products are free from defects in material and workmanship. ITW Brands's sole liability for any breach of this warranty shall be to replace this product or refund the purchase price.

Liability: Claims against GRK or ITW Brands shall be limited to a refund or credit for the price billed or paid for faulty or incorrect merchandise. Seller shall not be responsible for buyer's manufacturing costs, labor, alternate purchases, extra freight, replating, plating, lost profit, good will, recall costs, or other incidental or consequential damages.

Refunds/Replacements: In order to request a refund or replacement, please contact ITW Customer Service at BrandsCS@itwbrands.com or 877-489-2726 to start the process.

THERE ARE NO UNDERSTANDINGS, AGREEMENTS, REPRESENTATIONS, OR ADDITIONAL WARRANTIES, EXPRESSED OR IMPLIED (INCLUDING ANY REGARDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), NOT SPECIFIED HEREIN, RESPECTING ANY SALE OF PRODUCTS BY GRK FASTENERS™ (TO THE EXTENT PERMITTED BY LAW).

LIABILITY AND WARRANTIES

GRK Fasteners™ ("GRK") is a distributor of commercial-grade fasteners. The parts that we supply are quality inspected by independent labs.

We maintain lot traceability on all products listed in this catalog as long as they are in their original bulk boxes. Certifications are maintained on all fasteners.

Hydrogen Embrittlement: GRK takes measures during production of all fasteners to mitigate hydrogen embrittlement, including post-coating baking. These processes, however, do not guarantee that hydrogen embrittlement will not still be present or that it will not occur at a later date while in service. Specialized testing or a substitute part may be required, depending on the application.

GRK Warranty: GRK warrants to the first retail purchaser that its Climatek[™] coated, Deck Elite coated, and stainless steel screws will not rust under normal environmental conditions when used in accordance with the recommendations listed in this catalog. This warranty is not transferable. Visit www.grkfasteners.com for more information.



paslode.com





tapcon.com



backeronrockon.com



ramsetpat.com





redheadanchoring.com



FULL-LINE CATALOG

