



## 2026 FULL LINE PRODUCT CATALOG





[paslode.com](http://paslode.com)



[grkfasteners.com](http://grkfasteners.com)



[tapcon.com](http://tapcon.com)



[backeronrockon.com](http://backeronrockon.com)



[ramsetpat.com](http://ramsetpat.com)



[teksscrews.com](http://teksscrews.com)



[redheadanchoring.com](http://redheadanchoring.com)



[easyanchors.com](http://easyanchors.com)

# Table of Contents

---

## **PASLODE®**

PASLODE CORDLESS TOOLS	6-9
PASLODE PNEUMATIC TOOLS	10-17
PASLODE MANUAL TOOLS	18-19
PASLODE FUEL AND NAILS	20-25
PASLODE ACCESSORIES & CODE REPORTS	26-27

## **RED HEAD®**

TRUBOLT® CONCRETE WEDGE ANCHORS	58-59
RED HEAD T7+ ADHESIVE ANCHORS	59
RED HEAD CONCRETE ANCHORS	60-61

## **GRK FASTENERS™**

R4™ MULTI-PURPOSE FRAMING & DECKING SCREWS	30-31
METAL CONNECTOR SCREWS	32
DECK ELITE SCREWS	33
RSS™ RUGGED STRUCTURAL SCREWS	34-35
AUGERBOLT™ THROUGH BOLT FASTENING	36
ANGLEPRO™ HIDDEN FASTENING SYSTEM	37
FIN/TRIM™ TRIM HEAD SCREWS	38-39
RT COMPOSITE™ TRIM HEAD SCREWS	40-41
LOW PROFILE CABINET™ SCREWS	42-43
TOP STAR™ SHIM SCREWS	44-45
CALIBURN™ CONCRETE SCREWS	46
MSS™ METAL SIDING SCREWS	47
STAR DRIVE BITS & ACCESSORIES	48

## **RAMSET®**

RAMSET P.A.T. TOOLS & ACCESSORIES	62-63
-----------------------------------	-------

## **TEKS®**

TEKS ROOFING SCREWS	66-67
TEKS METAL TO METAL SCREWS	68-69
TEKS LATH SCREWS AND WOOD TO METAL SCREWS	70-71

## **BACKER-ON®, ROCK-ON®**

CEMENT BOARD SCREWS, CBS	72-73
--------------------------	-------

## **E-Z ANCOR®**

E-Z ANCOR MULTI-USE ANCHORS	74-75
-----------------------------	-------

## **TAPCON®**

TAPCON CONCRETE SCREW ANCHORS	52-55
TAPCON+ HEAVY DUTY CONCRETE SCREW ANCHORS	56-57

## **FASTENER APPLICATION INFORMATION**

FASTENER APPLICATION INFORMATION	76-77
----------------------------------	-------

## **WARRANTIES**

LIABILITY AND WARRANTIES	78-79
--------------------------	-------



## REPUTATION IS EVERYTHING

Paslode created the world's first pneumatic nailing system, and has led the category ever since. For over 80 years we've committed to nailing excellence - it's all we do. From engineering and manufacturing to service and support, we deliver the best nailers, nails and fuel in the industry. Nailing systems that deliver unrivaled power, productivity and pride of craftsmanship to get the job done right in less time, every time. This dedication to performance excellence has earned respect and recognition from pros, and a reputation as the brand that knows nailing better than any other. If you're committed to building your reputation, there's no better choice than Paslode.



# FREE CORDLESS 2 YEAR SERVICE PROMISE

We're so confident in the quality of our cordless tools that we back each one with the industry's best guarantee.

If you have a problem with one of our cordless tools, you can send it to us and we'll fix it for free.



**NO QUESTIONS.  
NO HASSLES.  
NO COSTS.**

## FUEL SYSTEM

BETTER THAN BATTERY ALONE



### **LIGHTER**

The power of fuel means no heavy battery. Which makes our nailers the lightest on the market.

### **MORE DURABLE**

Simple self-maintenance/cleaning keeps Paslode cordless nailers running for up to 200,000 shots.

### **MORE RELIABLE**

The simple combustion mechanism means fewer parts and less complicated wiring that can break.

# PASLODE® CORDLESS TOOLS FRAMING



Operation Modes:  
 • Rapid Fire  
 • Single Fire

30°  
 FULL HEAD NAIL

Designed and  
 Assembled in the U.S.A.

FREE CORDLESS  
 2 SERVICE  
 YEAR PROMISE

## CORDLESS XPRO 30 DEGREE FRAMING NAILER

- Reliable** - Consistently drives nails from the first shot to the last.
- Productive** - Drives 8x more nails per battery charge than battery only tools.
- Powerful** - More power than previous XP model for even better drivability in engineered materials.

### TOOL SPECIFICATIONS

**Model** CF325XPRO24

**Part #** 906800

**Weight** 7.9 lbs w/battery

**Dimensions** 12" L x 4" W x 14.5" H

**Nail Capacity** 100 (1 Strip)

**Nail Range** 2" - 3-1/4"

**Nail Diameter** .113 / .120 / .131

**Nail Type** 30° Paslode RounDrive® Full Head

**Fuel Type** Cordless Framing Fuel  
 (part# 816008)

**Nails per Fuel Cell** Approx. 1,200

**Battery** Li-ion battery (part# 902654)  
 and Charger (part# 902667)

**Battery Life** 6,000 nails per charge

**Warranty** 1-year full  
 5-year extended limited



MC  
 METAL CONNECTOR  
 NAIL

FREE CORDLESS  
 2 SERVICE  
 YEAR PROMISE

Designed and  
 Assembled in the U.S.A.

## CORDLESS 1-1/2" POSITIVE PLACEMENT® METAL CONNECTOR NAILER

- Convenience** - Move freely through the job without a hose or compressor.
- Maneuverability** - Lightweight and compact design for easy use overhead and in tight spaces.
- Accuracy** - Quickly and accurately locate holes with the Positive Placement® probe.

### TOOL SPECIFICATIONS

**Model** CF150-PP

**Part #** 906200

**Weight** 6.65 lbs w/battery

**Dimensions** 12.25" L x 5.5" W x 13.5" H

**Nail Capacity** 29 (1 Strip)

**Nail Range** 1-1/2"

**Nail Diameter** .131" and .148"

**Nail Type** Positive Placement® Metal  
 Connector Nails

**Fuel Type** Cordless Metal Connector Fuel  
 (only available in fuel + nail packs)

**Nails per Fuel Cell** Approx. 800

**Battery** Li-ion battery (part# 902654)  
 and Charger (part# 902667)

**Battery Life** 9,000 nails per charge

**Warranty** 1-year full  
 5-year extended limited

# PASLODE® CORDLESS TOOLS

## FINISH AND EXTERIOR



**16**  
GA

ANGLED NAIL

**FREE CORDLESS  
2 YEAR  
SERVICE  
PROMISE**

Designed and  
Assembled in the U.S.A.

### CORDLESS 16GA ANGLED FINISH NAILER

- Durability** - Combustion technology that's proven to last for years of everyday use and exceed 150,000 shots.
- Productivity** - Narrow tapered body with high visibility no-mar tip and accurate depth control for a consistent, superior finish from shot 1 to shot 1,200.
- Lightweight** - Compact and lightweight. Best-in-class weight at 4.5 lbs for greater comfort, control, access and ease of use.

#### TOOL SPECIFICATIONS

**Model** IM250A-Li2

**Part #** 916200

**Weight** 4.5 lbs w/battery

**Dimensions** 12" L x 3.5" W x 11.25" H

**Nail Capacity** 100 (2 Strips)

**Nail Range** 1-1/4" - 2-1/2"

**Nail Type** Angled 16GA - Galvanized

**Fuel Type** Cordless Finish Fuel (part# 816007)

**Nails per Fuel Cell** Approx. 1,200

**Battery** Li-ion battery (part# 902654)  
and Charger (part #902667)

**Battery Life** 12,000 nails per charge

**Warranty** 1-year full  
5-year extended limited



**16**  
GA

STRAIGHT NAIL

**FREE CORDLESS  
2 YEAR  
SERVICE  
PROMISE**

Designed and  
Assembled in the U.S.A.

### CORDLESS 16GA STRAIGHT FINISH NAILER

- Durability** - Combustion technology proven to exceed 150,000 shots
- Productivity** - Consistent power from shot 1 to 1,200.
- Lightweight** - The lightest cordless finish nailer in its class. At only 4.6 lbs. it gives pros greater comfort, control, access, and ease of use.

#### TOOL SPECIFICATIONS

**Model** IM250S-Li2

**Part #** 916500

**Weight** 4.6 lbs w/battery

**Dimensions** 10.5" L x 3.5" W x 11.75" H

**Nail Capacity** 100 (2 Strips)

**Nail Range** 1-1/4" - 2-1/2"

**Nail Type** Straight 16GA - Galvanized

**Fuel Type** Cordless Finish Fuel (part# 816007)

**Nails per Fuel Cell** Approx. 1,200

**Battery** Li-ion battery (part# 902654)  
and Charger (part #902667)

**Battery Life** 12,000 nails per charge

**Warranty** 1-year full  
5-year extended limited



**18**  
GA

Designed and  
Assembled in the U.S.A.

**FREE CORDLESS  
2 YEAR SERVICE  
PROMISE**

## CORDLESS 18GA BRAD NAILER

- Maneuverable** - Able to fit in tight spaces where others can't.
- Precise** - Drives nails flush for high quality craftsmanship.
- Lightweight** - The lightest cordless nailer on the market makes for reduced fatigue and increased productivity.

### TOOL SPECIFICATIONS

**Model** CT200S24

**Part #** 918200

**Weight** 4.25 lbs w/battery

**Dimensions** 11" L x 3.5" W x 11.5" H

**Nail Capacity** 110

**Nail Range** 5/8" - 2"

**Nail Type** 18GA - Galvanized

**Fuel Type** Cordless Finish Fuel (part# 816007)

**Nails per Fuel Cell** Approx. 1,200

**Battery** Li-ion battery (part# 902654)  
and Charger (part #902667)

**Battery Life** 12,000 nails per charge

**Warranty** 1-year full  
5-year extended limited



**0°**

Designed and  
Assembled in the U.S.A.

**FREE CORDLESS  
2 YEAR SERVICE  
PROMISE**

## CORDLESS CSF SIDING & FENCING NAILER

- Reliable** - Fewer jams than 15° wire weld coil nails
- Convenient** - Faster set up & tear down time than pneumatic coil nailers
- Productive** - More nails with fuel + battery vs. battery only nailers

### TOOL SPECIFICATIONS

**Model** CE20024

**Part #** 919100

**Weight** 6.65 lbs w/battery

**Dimensions** 12.2" L x 4.7" W x 13.2" H

**Nail Capacity** 200 NAILS (1 COIL)

**Nail Range** 1-1/4" - 2"

**Nail Type** Paslode 0° Coil Nails  
(only available in fuel + nail packs)

**Fuel Type** Coil Fuel Sold in Fuel + Nail Packs

**Nails per Fuel Cell** Approx. 800

**Battery** Li-ion battery (part# 902654)  
and Charger (part #902667)

**Battery Life** 4,500 nails per charge

**Warranty** 1-year full  
5-year extended limited

# PASLODE® PNEUMATIC TOOLS

## FRAMING



30°

FULL HEAD NAIL

Designed and  
Assembled in the U.S.A.

### 30 DEGREE POWERMASTER PLUS™ FRAMING NAILER

- Durable** - Hassle-free design allows for long term, maintenance free operation which reduces associated costs.
- Reliable** - Consistently drives nails flush.
- Powerful** - Proven performance on the toughest jobsites.
- Hassel-Free Maintenance** - Regular lubrication not required. Full cleaning and lubrication recommended every 500k shots.

#### TOOL SPECIFICATIONS

**Model** F350S

**Part #** 501000

**Weight** 8.4 lbs

**Dimensions** 19.25" L x 6.5" W x 13.25" H

**Nail Capacity** 2 Strips (84 nails)

**Nail Range** 2" - 3-1/2"

**Nail Diameter** .113 / .120 / .131

**Nail Type** 30 Degree Paper Tape  
RounDrive®

**Operating Pressure** 80-120 psi (5.5 - 8.3 bar)

**Warranty** 1-year full  
5-year extended limited



30°

FULL HEAD NAIL

Designed and  
Assembled in the U.S.A.

### 30 DEGREE COMPACT FRAMING NAILER

- Compact** - At only 12 inches long, fits easily into tight spaces.
- Lightweight** - Comfortable and maneuverable when working overhead.
- Productive** - By-pass follower provides quick re-load for increased productivity.

#### TOOL SPECIFICATIONS

**Model** F325R

**Part #** 513000

**Weight** 7.0 lbs

**Dimensions** 12.3" L x 4.3" W x 12.9" H

**Nail Capacity** 1 strip (42 nails)

**Nail Range** 2" - 3-1/4"

**Nail Diameter** .113 / .120 / .131

**Nail Type** 30 Degree Paper Tape  
RounDrive®

**Operating Pressure** 90-120 psi (6.2 - 8.3 bar)

**Warranty** 1-year full  
5-year extended limited



# PASLODE® PNEUMATIC TOOLS

## POSITIVE PLACEMENT® & tetraGRIP™



Hassle-free maintenance



Designed and Assembled in the U.S.A. 

### 2 1/2" POSITIVE PLACEMENT® METAL CONNECTOR NAILER

- Fast and accurate** - The innovative Positive Placement® probe tip guides nails for unmatched hole to hole speed.
- Versatile** - Drives both 1 1/2" and 2 1/2" Positive Placement® metal connector nails with shank diameters from .131 to .162.
- Powerful** - Powerful motor drives nails flush, even into engineered lumber.
- Hassel-Free Maintenance** - Regular lubrication not required. Full cleaning and lubrication recommended every 500k shots.

#### TOOL SPECIFICATIONS

<b>Model</b>	F250S-PP
<b>Part #</b>	500855
<b>Weight</b>	8.5 lbs
<b>Dimensions</b>	19.5" L x 5" W x 13.88" H
<b>Nail Capacity</b>	44 (2 Strips)
<b>Nail Range</b>	1-1/2" - 2-1/2"
<b>Nail Diameter</b>	.131 / .148 / .162
<b>Nail Type</b>	Positive Placement® Brite, Galvanized
<b>Operating Pressure</b>	80-120 psi (5.5 - 8.3 bar)
<b>Warranty</b>	1-year full 5-year extended limited



Designed and Assembled in the U.S.A. 

### 1 1/2" POSITIVE PLACEMENT® METAL CONNECTOR NAILER

- Fast** - Positive Placement® probe for fastest hole to hole speed which provides widest angle of approach.
- Accurate** - Probing tip guides nails into hardware holes.
- Powerful** - Drives up to 1 1/2" x .148 Metal Connector Nails flush even into LVL for all day performance.

#### TOOL SPECIFICATIONS

<b>Model</b>	F150S-PP
<b>Part #</b>	515850
<b>Weight</b>	6.25 lbs
<b>Dimensions</b>	13" L x 3.7" W x 11.7" H
<b>Nail Capacity</b>	29 (1 Strip)
<b>Nail Range</b>	1-1/2"
<b>Nail Diameter</b>	.131 / .148
<b>Nail Type</b>	Positive Placement® Brite, Galvanized
<b>Operating Pressure</b>	90-120 psi (6.2 - 8.3 bar)
<b>Warranty</b>	1-year full 5-year extended limited



0°

COIL SIDING NAIL

Designed and  Assembled in the U.S.A.

## tetraGRIP™ COIL SUBFLOOR FASTENING SYSTEM

- Eliminates Nail Induced Floor Squeaks** - tetraGRIP fastener rotates as it drives to bond with the wood fibers. Use of glue between sheathing panels and floor framing is not required.
- Reduces Builder Warranty Costs** - Fewer call backs & repair costs
- Reduces Framer Repair Costs** - More efficient than screws and saves the framing company time and labor costs

### TOOL SPECIFICATIONS

**Model** PF237C

**Part #** 503000

**Weight** 8.3 lbs

**Dimensions** 12.25" L x 5" W x 13.5" H

**Nail Capacity** 120 (1 Coil)

**Nail Range** 2-3/8"

**Nail Diameter** .113

**Nail Type** tetraGRIP™ 0 Degree Coil Subfloor Fastener

**Operating Pressure** 90-120 psi (6.2 - 8.3 bar)

**Warranty** 1-year full  
5-year extended limited



tetraGRIP™ SUBFLOOR FASTENER							
Part #	Length	Diameter	Shank	Finish	Fasteners/Coil	Coils/Carton	Fasteners/Carton
650605	2-3/8"	.113	Barbed	Brite	120	18	2,160



0°

COIL SIDING NAIL

## tetraGRIP™ COIL SIDING NAILER SYSTEM

- Fast** - Install fiber cement siding 20% faster on average. Fast, secure installation without fastening to studs.
- Maneuverability** - The tetraGRIP™ Coil Siding Nailer weighs in at 4.9 lbs and has a compact design for maximum maneuverability.

### TOOL SPECIFICATIONS

**Model** TG100CSN

**Part #** 515400

**Weight** 4.9 lbs

**Dimensions** 12.25" L x 6" W x 11.5" H

**Nail Capacity** 120 (1 Coil)

**Nail Range** 1-1/8"

**Nail Diameter** .117

**Nail Type** tetraGRIP™ 0 Degree Studless Coil Siding Fastener

**Operating Pressure** 90-120 psi (6.2 - 8.3 bar)

**Warranty** 1-year full  
5-year extended limited



tetraGRIP™ SIDING FASTENER							
Part #	Length	Dia.	Shank	Finish	Fasteners/Coil	Coils/Carton	Fasteners/Carton
650964	1-1/8"	.117	Barbed	Galv. Steel	120	30	3,600

# PASLODE® PNEUMATIC TOOLS

## FINISH & EXTERIOR



**16**  
GA  
STRAIGHT NAIL

### 16GA STRAIGHT FINISH NAILER

- Lightweight** - Optimal balance, maximum comfort, and reduced fatigue for increased productivity.
- Consistent** - Each time the trigger is pulled, the nail drives flush into the applications.
- Durable** - Hassle-free design allows for long term, maintenance free operation which reduces associated costs.

#### TOOL SPECIFICATIONS

**Model** T250S-F16P

**Part #** 515500

**Weight** 3.9 lbs

**Dimensions** 12.3" L x 2.9" W x 11.6" H

**Nail Capacity** 100 (2 Strips)

**Nail Range** 1" - 2-1/2"

**Magazine Angle** Straight Collation

**Nail Type** 16GA Galvanized Straight

**Operating Pressure** 80-120 psi (5.5 - 8.3 bar)

**Warranty** 1-year full  
5-year extended limited



**18**  
GA  
BRAD NAIL

### 18GA STRAIGHT BRAD FINISH NAILER

- Durability** - Rugged lightweight body withstands high impact even if dropped.
- Reliability** - Professional-grade design offers consistent drive to finish the job right the first time.
- Precision** - Smaller nose provides clear line of sight for accurate nail placement.

#### TOOL SPECIFICATIONS

**Model** T200-F18P

**Part #** 515600

**Weight** 2.9 lbs

**Dimensions** 10.04" L x 2.56" W x 10.63" H

**Nail Capacity** 100 (2 Strips)

**Nail Range** 5/8" - 2"

**Magazine Angle** Straight Collation

**Nail Type** 18GA Galvanized Straight

**Operating Pressure** 80-120 psi (5.5 - 8.3 bar)

**Warranty** 1-year full  
5-year extended limited



0°

COIL SIDING NAIL

## 0 DEGREE COIL SIDING NAILER

- **Consistent** - Reliable depth of drive means greater efficiency on jobsites
- **Clean Finish** - Eliminates wire flagging
- **Lightweight & Balanced** - Increase comfort to work longer and finish jobs faster

### TOOL SPECIFICATIONS

**Model** PS225C

**Part #** 515900

**Weight** 4.5 lbs

**Dimensions** 12-1/2" L x 5-3/4" W x 12-5/8" H

**Nail Capacity** 300 (1 Coil)


**Nail Range** 1-1/2" - 2-1/4"

**Nail Diameter** .080 - .105

**Nail Type** 0 Degree Plastic Collated Coil Nails

**Operating Pressure** 80-120 psi

**Warranty** 1-year full  
5-year extended limited

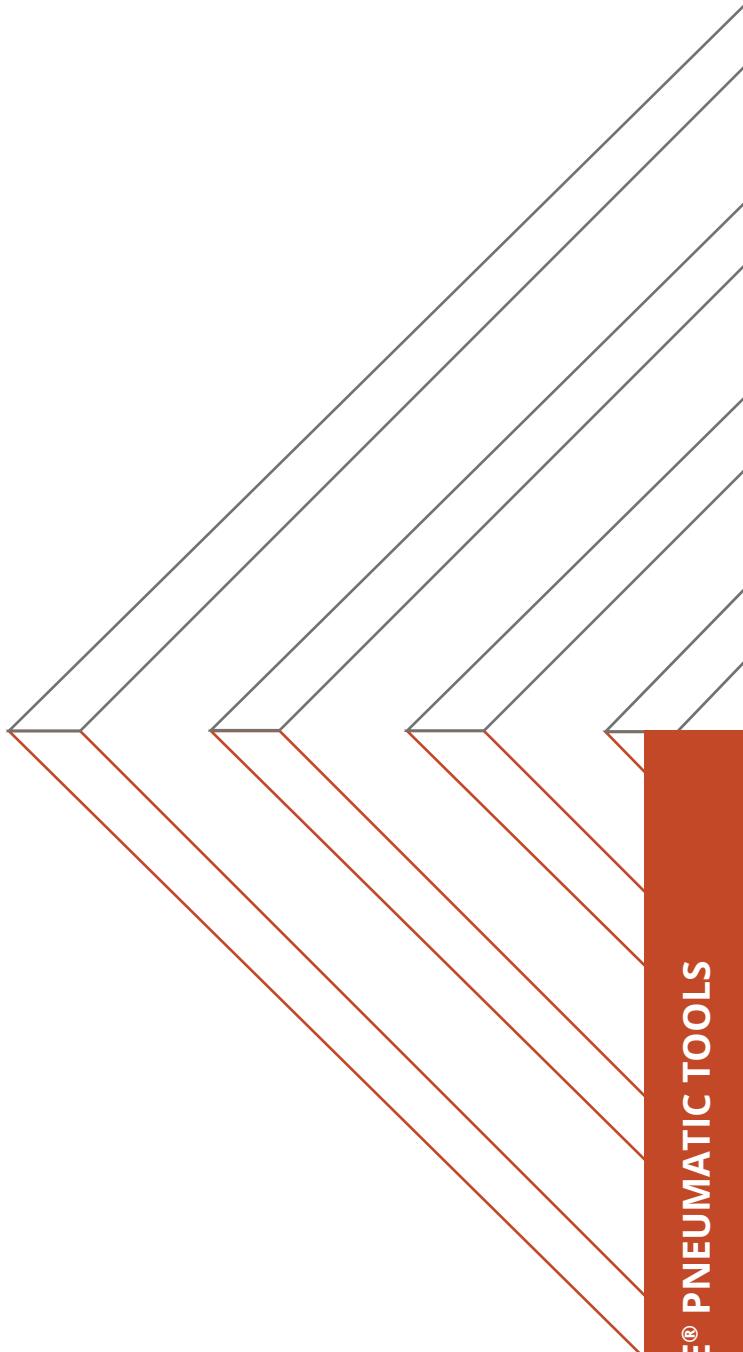

# PASLODE® PNEUMATIC TOOLS

## STAPLERS



**16**  
GA  
MEDIUM CROWN  
STAPLE PASLODE

### 16GA STANDARD CROWN STAPLER

- Speed** - Up to 10 staples per second.
- Power** - Drives flush in all materials.
- Durable** - Heavy duty all-metal magazine design.



**16**  
GA  
WIDE CROWN  
STAPLE PASLODE

### 16GA WIDE CROWN STAPLER

- Speed** - Up to 10 staples per second.
- Power** - Drives flush in all materials.
- Durable** - Heavy duty all-metal magazine design.

#### TOOL SPECIFICATIONS

<b>Model</b>	SCS200
<b>Part #</b>	515700
<b>Weight</b>	5.6 lbs
<b>Dimensions</b>	15.1" L x 3.4" W x 11.7" H
<b>Magazine Capacity</b>	150 staples
<b>Staple Range</b>	3/4" - 2"
<b>Staple Type</b>	1/2" Crown 16GA Galvanized
<b>Operating Pressure</b>	80-120 psi (5.5 - 8.3 bar)
<b>Warranty</b>	1-year full 5-year extended limited

#### TOOL SPECIFICATIONS

<b>Model</b>	WCS200
<b>Part #</b>	515800
<b>Weight</b>	5.9 lbs
<b>Dimensions</b>	15.1" L x 3.4" W x 11.7" H
<b>Magazine Capacity</b>	150 staples
<b>Staple Range</b>	3/4" - 2"
<b>Staple Type</b>	15/16" Crown 16GA Galvanized
<b>Operating Pressure</b>	80-120 psi (5.5 - 8.3 bar)
<b>Warranty</b>	1-year full 5-year extended limited



**18GA**  
NARROW CROWN  
STAPLE

## 18GA CAPSTAPLER

- **Convenient** - Staples and caps in one easy step.
- **Consistent Drive Performance** - Saves time on roofing felt and housewrap.
- **Easy Loading** - Open design makes staple and cap reloading a snap.

### TOOL SPECIFICATIONS

<b>Model</b>	CS150
<b>Part #</b>	502575
<b>Weight</b>	4.8 lbs
<b>Dimensions</b>	15.5" L x 4" W x 10.5" H
<b>Staple Capacity</b>	90 Staples
<b>Cap Capacity</b>	1 Spool (240 Caps)
<b>Staple Range</b>	1" - 1-1/2"
<b>Staple Type</b>	18GA 3/8" Narrow Crown
<b>Operating Pressure</b>	70-110 psi (4.8 - 7.6 bar)
<b>Warranty</b>	1-year full 5-year extended limited

# PASLODE® MANUAL TOOLS

## STAPLERS



### 20GA HAMMER TACKER STAPLER

- Durable** - Industrial strength design keeps you working for years.
- Professional** - Engineered specifically for professional building applications.
- Reliable** - Reduces tearing in roof paper, insulation and housewrap.



### 20GA COMPRESSION STAPLER


- Simple** - Install staples with an easy push/squeeze.
- Professional** - Engineered specifically for professional building applications.
- Versatile** - Adjust installation power for the specific job requirements.

#### TOOL SPECIFICATIONS

<b>Model</b>	HT-550
<b>Part #</b>	1013290
<b>Weight</b>	2 lbs
<b>Dimensions</b>	11.25" L x 1.25" W x 3" H
<b>Magazine Capacity</b>	168 staples (2 strips)
<b>Staple Type</b>	5000 Series
<b>Staple Gauge</b>	20
<b>Staple Crown Width</b>	1/2"
<b>Staple Length</b>	1/4" - 3/8"

#### TOOL SPECIFICATIONS

<b>Model</b>	CS-5000
<b>Part #</b>	1011910
<b>Weight</b>	1.8 lbs
<b>Dimensions</b>	7.5" L x 1.50" W x 4.75" H
<b>Magazine Capacity</b>	84 staples (1 strip)
<b>Staple Type</b>	5000 Series
<b>Staple Gauge</b>	20
<b>Staple Crown Width</b>	1/2"
<b>Staple Length</b>	1/4" - 9/16"

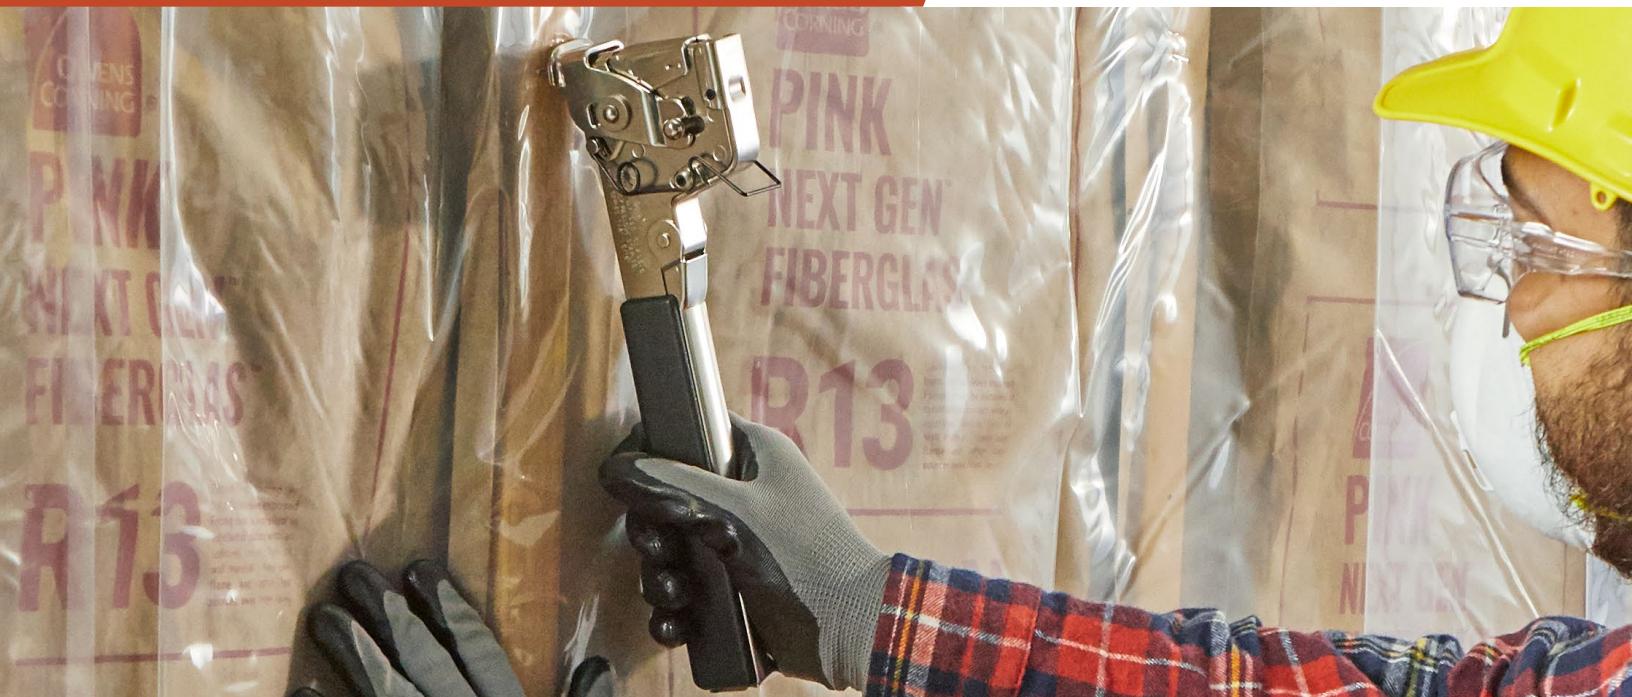

## COMING SUMMER 2026!

### NEW STAPLERS AND STAPLES PROGRAM



# PASLODE® FUEL + NAIL PACKS

## FUEL+ NAIL PACKS

### FUEL + NAIL PACKS



Power Boost Coating

CORDLESS 30 DEGREE FRAMING FUEL + NAIL PACKS						
Part #	Length	Diameter	Shank	Finish	Nail Qty.	Fuel Cell Qty.
650564	2"	.113	Ring	HDG	1,000	1
650526	2-3/8"	.113	Ring	HDG	1,000	1
650522	2-3/8"	.113	Smooth	Brite	1,000	1
650523	2-3/8"	.113	Ring	Brite	1,000	1
650565	2-3/8"	.113	Ring	Brite	3,000	3
650527	3"	.120	Ring	*HDG	1,000	1
650524	3"	.120	Smooth	*Brite	1,000	1
650631	3"	.120	Smooth	*Brite	3,000	3
650525	3"	.131	Smooth	*Brite	1,000	1
650566	3"	.131	Smooth	*Brite	3,000	3
650535	3-1/4"	.131	Smooth	*Brite	1,000	1
650630	3-1/4"	.131	Smooth	*Brite	3,000	3
650615	3-1/4"	.131	Smooth	*HDG	900	1



CORDLESS POSITIVE PLACEMENT® METAL CONNECTOR FUEL + NAIL PACKS						
Part #	Length	Diameter	Shank	Finish	Nail Qty.	Fuel Cell Qty.
650921	1-1/2"	.131	Smooth	Brite, Heat Treated	800	1
650923	1-1/2"	.131	Smooth	Mech Galv, Heat Treated	800	1
650935	1-1/2"	.131	Smooth	Brite, Heat Treated	1,600	2
650937	1-1/2"	.131	Smooth	Mech Galv, Heat Treated	1,600	2
650922	1-1/2"	.148	Smooth	Brite, Heat Treated	800	1
650924	1-1/2"	.148	Smooth	Mech Galv, Heat Treated	800	1
650936	1-1/2"	.148	Smooth	Brite, Heat Treated	1,600	2
650938	1-1/2"	.148	Smooth	Mech Galv, Heat Treated	1,600	2

### CORDLESS CSF 0 DEGREE COIL SIDING + FENCING FUEL + NAIL PACKS

Part #	Length	Diameter	Shank	Finish	Nail Qty.	Fuel Cell Qty.
650975	1-7/8"	.099	Screw	Aluminum	2,400	3
650972	1-7/8"	.086	Ring	Hot-Dipped	2,400	3
650973	2"	.099	Ring	Hot-Dipped	2,400	3
650977	2"	.099	Ring	316 Stainless Steel	2,400	3

### SIDING AND METAL CONNECTOR FUEL



PART #	PRODUCT	DESCRIPTION	ASSOCIATED PRODUCT(S)
816009	Cordless Coil Siding & Metal Connector Fuel	Drives 800 nails, 27 - month shelf life	919100 - CE20024 Cordless CSF Siding & Fencing Nailer 906200 - CF150-PP Cordless 1-1/2" Positive Placement Metal Connector Nailer

## FRAMING FUEL



PART #	PRODUCT	DESCRIPTION	ASSOCIATED PRODUCT(S)
<b>816008</b>	Cordless Framing Fuel - All Season	Drives 1,200 nails, 27 - month shelf life	906800 - CF325XPRO24 XPro Cordless Framing Nailer 906800DHL - CF325XPRO24 XPro Cordless Framing Nailer 906300 - CFN325XP Cordless XP Framing Nailer 905600 - CF325XP Cordless Framing Nailer 902600 - CF325Li Cordless Framing Nailer 900420 - IMCT Cordless Framing Nailer (with valve)

## FRAMING NAILS



30° ROUNDRIVE® FRAMING NAILS					
Part #	Length	Diameter	Shank	Finish	#/Box
<b>650272</b>	2"	.113	Smooth	Brite	5,500
<b>650381</b>	2"	.113	Ring	HDG	2,000
<b>650273</b>	2"	.113	Ring	Brite	5,500
<b>650382</b>	2-3/8"	.113	Smooth	HDG	2,000
<b>650604</b>	2-3/8"	.113	Smooth	Brite	2,000
<b>650237</b>	2-3/8"	.113	Smooth	Brite	5,000
<b>650383</b>	2-3/8"	.113	Ring	HDG	2,000
<b>650238</b>	2-3/8"	.113	Ring	Brite	5,000
<b>650966</b>	2-3/4"	.120	Smooth	Brite	3,500
<b>650836</b>	3"	.120	Smooth	Brite	2,500
<b>650384</b>	3"	.120	Smooth	HDG	2,000
<b>650385</b>	3"	.120	Ring	HDG	2,000
<b>650967</b>	3"	.120	Ring	Brite	3,000
<b>405253</b>	2-1/2"	.131	Smooth	Brite	3,000
<b>650830</b>	3"	.131	Smooth	Brite	2,500
<b>650386</b>	3"	.131	Smooth	HDG	2,000
<b>650387</b>	3"	.131	Ring	HDG	2,000
<b>650839</b>	3-1/4"	.131	Smooth	Brite	2,500
<b>650388</b>	3-1/4"	.131	Smooth	HDG	2,000
<b>650474</b>	3-1/4"	.131	Ring	HDG	2,000
<b>650968</b>	3-1/2"	.131	Smooth	Brite	2,500
<b>650476</b>	3-1/2"	.131	Smooth	HDG	2,000
<b>657381</b>	2"	.113	Ring	HDG	750
<b>657604</b>	2-3/8"	.113	Smooth	Brite	750
<b>657603</b>	2-3/8"	.113	Ring	Brite	750
<b>657383</b>	2-3/8"	.113	Ring	HDG	750
<b>657836</b>	3"	.120	Smooth	Brite	750
<b>657385</b>	3"	.120	Ring	HDG	750

30° ROUNDRIVE® FRAMING NAILS (Cont.)						
Part #	Length	Diameter	Shank	Finish	#/Box	
<b>657830</b>	3"	.131	Smooth	Brite	750	
<b>657387</b>	3"	.131	Ring	HDG	750	
<b>657388</b>	3-1/4"	.131	Smooth	HDG	750	
<b>657839</b>	3-1/4"	.131	Smooth	Brite	750	

For use with 906300, 906800, 906800DHL, 501000, 502000 and 513000



Positive Placement® Nail heads marked for easy identification

POSITIVE PLACEMENT® METAL CONNECTOR NAILS					
Part #	Length	Dia.	Finish	#/Box	
<b>650645</b>	1-1/2"	.131	Brite, Heat Treated	1,000	(4 boxes per carton, 4,000 Qty)
<b>650025</b>	1-1/2"	.131	Brite, Heat Treated	4,000	(Bulk box)
<b>650646</b>	1-1/2"	.148	Brite, Heat Treated	1,000	(3 boxes per carton, 3,000 Qty)
<b>650026</b>	1-1/2"	.148	Brite, Heat Treated	3,000	(Bulk box)
<b>650199</b>	2-1/2"	.131	Brite, Heat Treated	2,500	(Bulk box)
<b>650027</b>	2-1/2"	.148	Brite, Heat Treated	2,500	(Bulk box)
<b>650028</b>	2-1/2"	.162	Brite, Heat Treated	2,000	(Bulk box)
<b>650197</b>	1-1/2"	.131	Mech. Galv, Heat Treated	4,000	(Bulk box)
<b>650481</b>	1-1/2"	.148	Mech. Galv, Heat Treated	500	(4 boxes per carton, 2,000 Qty)
<b>650014</b>	1-1/2"	.148	Mech. Galv, Heat Treated	3,000	(Bulk box)
<b>650106</b>	2-1/2"	.148	Mech. Galv, Heat Treated	2,500	(Bulk box)
<b>650198</b>	2-1/2"	.162	Mech. Galv, Heat Treated	2,000	(Bulk box)


For use with 515850 (1-1/2") and 500855 (1-1/2" + 2-1/2")

# PASLODE® FINISH & EXTERIOR FUEL, NAILS & STAPLES

## FINISH FUEL

PART #	PRODUCT	DESCRIPTION	ASSOCIATED PRODUCT(S)
 816007	Cordless Finish Fuel (2 pack)	Drives 1,200 nails, 21 - month shelf life	916200 - Cordless 16 Ga Angled Li-ion Finish Nailer 902400 - Cordless 16 Ga Angled Li-ion Finish Nailer 916000 - Cordless 16 Ga Straight Li-ion Finish Nailer 916500 - Cordless 16 Ga Straight Li-ion Finish Nailer 918000 - Cordless 18 Ga Li-ion Brad Nailer 918100 - Cordless 18 Ga Straight Li-ion Brad Nailer 918200 - Cordless 18 Ga Li-ion Brad Nailer

## FINISH NAILS



### 16GA ANGLED FINISH

Part #	Length	Gauge	Finish	Qty.
650230	1-1/4"	16 GA Angled	Galvanized	2,000
650231	1-1/2"	16 GA Angled	Galvanized	2,000
650047	2"	16 GA Angled	Galvanized	2,000
650232	2-1/2"	16 GA Angled	Galvanized	2,000

6 boxes per carton, 12,000 Qty  
For use with 916200, 902400, 900600 and 500910



### 16GA STRAIGHT FINISH

Part #	Length	Gauge	Finish	Qty.
650282	1-1/4"	16 GA Straight	Galvanized	2,000
650283	1-1/2"	16 GA Straight	Galvanized	2,000
650285	2"	16 GA Straight	Galvanized	2,000
650287	2-1/2"	16 GA Straight	Galvanized	2,000

6 boxes per carton, 12,000 Qty  
For use with 916000, 916500, 515500 and 501680




### 18GA BRAD NAILS

Part #	Length	Gauge	Finish	Qty.
650212	1"	18 GA Brad	Galvanized	2,000
650213	1-1/4"	18 GA Brad	Galvanized	2,000
650214	1-1/2"	18 GA Brad	Galvanized	2,000
650215	2"	18 GA Brad	Galvanized	2,000

6 boxes per carton, 12,000 Qty  
For use with 918000, 918100, 918200, 515600 and 500959

## STAPLES



16GA STANDARD (1/2") CROWN STAPLES					
Part #	Length	Wire	Crown	Finish	Qty.
0T5242	1"	16GA	1/2"	Galvanized	16,500
0T5238	1-1/4"	16GA	1/2"	Galvanized	13,500
0T2695	1-1/2"	16GA	1/2"	Galvanized	10,500
0T2250	1-3/4"	16GA	1/2"	Galvanized	9,000
0T2258	2"	16GA	1/2"	Galvanized	7,500

For use with 515700, 900078NT, and 501230

16GA WIDE (15/16") CROWN STAPLES					
Part #	Length	Wire	Crown	Finish	Qty.
404069	7/8"	16GA	15/16"	Galvanized	9,000
404070	1"	16GA	15/16"	Galvanized	9,000
404071	1-1/4"	16GA	15/16"	Galvanized	9,000
0T2855	1-1/2"	16GA	15/16"	Galvanized	10,500
650098	1-3/4"	16GA	15/16"	Galvanized	9,000

For use with 515800, and 501265



20GA (1/2") CROWN 5000 SERIES STAPLES							
Part #	Length	Wire	Crown	Finish	Point	Qty.	Ctns/Case
650929	1/4"	20GA	1/2"	Galvanized	Chisel	5,000	20
650925	5/16"	20GA	1/2"	Galvanized	Chisel	5,000	20
650932	5/16"	20GA	1/2"	Galvanized	Divergent	5,000	20
650926	5/16"	20GA	1/2"	Galvanized	Chisel	5,000	10
650934	5/16"	20GA	1/2"	Galvanized	Chisel	1,000	20
650928	3/8"	20GA	1/2"	Galvanized	Chisel	5,000	20
650930	3/8"	20GA	1/2"	Galvanized	Chisel	5,000	10
650927	1/2"	20GA	1/2"	Galvanized	Chisel	5,000	20
650931	9/16"	20GA	1/2"	Galvanized	Chisel	5,000	20
650933	9/16"	20GA	1/2"	Galvanized	Chisel	5,000	10

For use with 1013290 and 1011910

# PASLODE® FINISH & EXTERIOR STAPLES (CONT.) & COIL SIDING NAILS

## CAP STAPLES



FasCaps PLASTIC CAPS AND STAPLES					
Part #	Length	Wire	Crown	Finish	Qty.
650592	1"	18GA	3/8"	Galvanized	10,080
650597	1-1/2"	18GA	3/8"	Galvanized	8,640

FasCaps are 6 inner boxes per carton  
For use with 502575

## COIL SIDING NAILS



0 DEGREE COIL SIDING NAILS					
Part #	Length	Dia.	Shank	Finish	Qty.
650955	1-7/8"	.086	Ring	Hot Dipped Galv.	3,600
650958	1-7/8"	.091	Ring	Electro-Galvanized	9,000
650960	1-7/8"	.091	Smooth	Electro-Galvanized	9,000
650954	1-7/8"	.099	Screw	Aluminum	9,000
650959	2"	.092	Smooth	Hot Dipped Galv.	3,600
650956	2-1/4"	.092	Ring	Hot Dipped Galv.	3,600
650957	2-1/4"	.099	Smooth	Electro-Galvanized	7,200
650961	2-1/4"	.099	Ring	Electro-Galvanized	7,200

Note: Coils contain 300 fasteners



# PASLODE® ACCESSORIES & CODE REPORTS

## CORDLESS & PNEUMATIC

### CORDLESS BATTERIES

PART #	PRODUCT	DESCRIPTION	ASSOCIATED PRODUCT(S)
<b>902654</b>	Paslode 7V Li-ion Battery	Full charge in 90 minutes  Framing: XPro: 6,000 nails per charge XP: 9,000 nails per charge PPN: 9,000 nails per charge CSF: 4,500 nails per charge  Finish: 12,000 nails per charge	906800 - CF325XPRO24 XPro Cordless Framing Nailer 906800DHL- CF325XPRO24 XPro Cordless Framing Nailer 906300 - CFN325XP Cordless XP Framing Nailer 905600 - CF325XP Cordless Framing Nailer 916200 - Cordless 16 Ga Angled Li-ion Finish Nailer 902400 - Cordless 16 Ga Angled Li-ion Finish Nailer 916000 - Cordless 16 Ga Straight Li-ion Finish Nailer 916500 - Cordless 16 Ga Straight Li-ion Finish Nailer 918000 - Cordless 18 Ga Li-ion Brad Nailer 918200 - Cordless 18 Ga Li-ion Brad Nailer 906200 - CF150-PP Cordless 1-1/2" Positive Placement Metal Connector Nailer
<b>902667</b>	Paslode 7V Li-ion Battery Charger	2x faster charge time, 2 minute quick charge drives up to 200 nails	902654 - Paslode 7V Li-ion Battery
<b>219413</b>	Auto Adapter Kit	Charger base and auto adapter cord	All Paslode Li-ion Tools
<b>900200</b>	Paslode Ni-Cd Stick Battery Charger	2 hour charge time	404717, 404717A - Oval Ni-Cd Battery

### CORDLESS ACCESSORIES


PART #	PRODUCT	DESCRIPTION	ASSOCIATED PRODUCT(S)
<b>219377</b>	Cordless 7V Li-ion Framing Tune-up Kit		906800 - CF325XPRO24 XPro Cordless Framing Nailer 906800DHL- CF325XPRO24 XPro Cordless Framing Nailer 906300 - CFN325XP Cordless XP Framing Nailer 905600 - CF325XP Cordless Framing Nailer 902600 - CF325Li Cordless Framing Nailer
<b>219409</b>	Cordless Li-ion Finish/Trim Tune-up Kit		902400 - IM250A-Li 16 Ga Angled Li-ion Finish Nailer 916000 - IM250S-Li 16 Ga Straight Li-ion Finish Nailer 918000 - IM200Li 18 Ga Straight Li-ion Brad Nailer 916200 - Cordless 16 Ga Angled Li-ion Finish Nailer 916500 - Cordless 16 Ga Straight Li-ion Finish Nailer 918200 - Cordless 18 Ga Li-ion Brad Nailer
<b>219348</b>	Cordless Tool Cleaner	12oz. Bottle	All Paslode Cordless Tools
<b>401482</b>	Cordless Nailer Lubrication Oil	4oz. Bottle	All Paslode fuel-powered cordless nailers
<b>902473</b>	No-Mar Tips	3-pack - Angled	902400 - Cordless 16 Ga Angled Finish Nailer 916200 - Cordless 16 Ga Angled Li-ion Finish Nailer 916500 - Cordless 16 Ga Straight Li-ion Finish Nailer
<b>219236</b>	No-Mar Tips	3-pack - Straight	916000 - Cordless 16 Ga Straight Finish Nailer

## PNEUMATIC ACCESSORIES

PART #	PRODUCT	DESCRIPTION	ASSOCIATED PRODUCT(S)
219228	No-Mar Nose	Protects wood surfaces	501000 - F350-S PowerMaster Plus

## CODE REPORTS

LISTED MANUFACTURER	PRODUCT	ESR NUMBER	QR CODE
ISANTA	Power-Driven Staples and Nails	ESR-1539	
Paslode, An Illinois Tool Works Company	Paslode Positive Placement Nails and Duo-Fast Connector Framing Nails	ESR-2126	
Paslode, An Illinois Tool Works Company	Paslode tetraGRIP nails	ESR-3071	
Paslode, An Illinois Tool Works Company	Paslode Nails	ESR-3072	
Paslode, An Illinois Tool Works Company	Paslode and Duo-Fast Galvanized Nails	ESR-3326	



**GREATNESS AT EVERY TURN**

GRK Fasteners offers a wide selection of fasteners that includes multipurpose, structural, deck, trim, cabinet, composite, stainless steel and metal connector screws, but they all have one thing in common—quality.

GRK Fasteners allows users to complete jobs with more productivity. Our patented W-Cut™ Threadform feature reduces installation torque and allows fast driving and ease of install, the recessed Star Drive eliminates recess stripping for improved productivity, and the Zip-Tip™ feature eliminates the need for pre-drilling and allows one-step installation. GRK's feature-rich screws drive jobsite productivity and allow users to keep moving from one job to the next.

GRK fasteners are corrosion resistant, approved for use in treated lumber and designed for both interior and exterior use.






**RSS™**  
RUGGED STRUCTURAL SCREWS



**METAL CONNECTOR**  
SCREWS




**FINISH**  
TRIM HEAD SCREWS

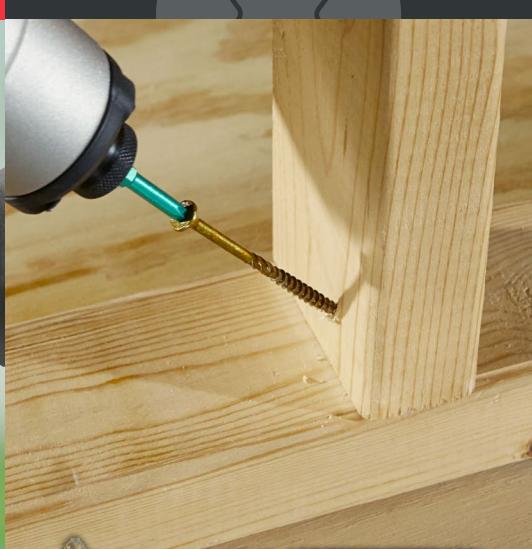


**RT COMPOSITE™**  
EXTERIOR TRIM SCREWS



**R4™**  
MULTI-PURPOSE SCREWS

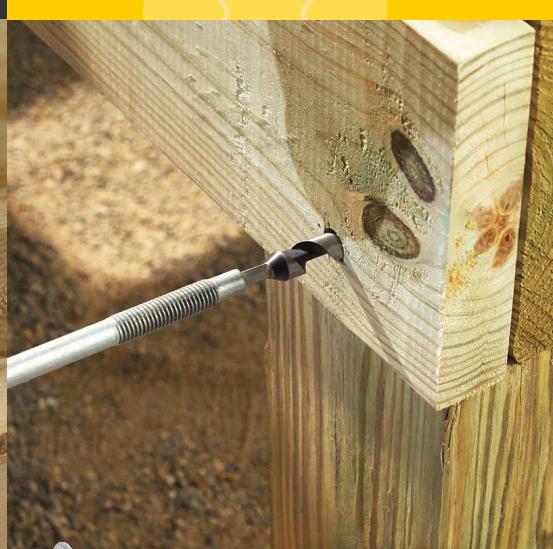

**AUGERBOLT™**  
THROUGH BOLT FASTENING

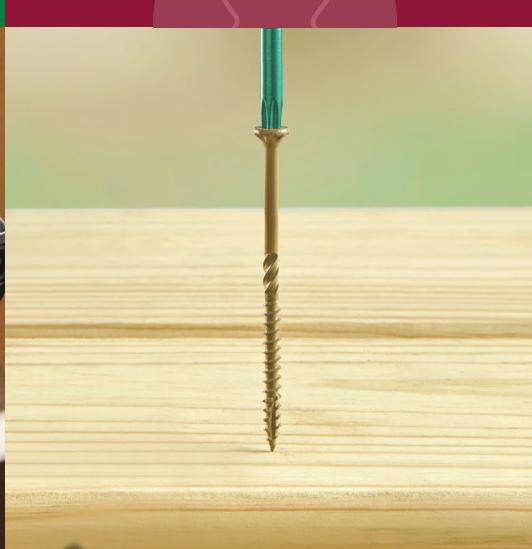

**CABINET**  
WASHERED SCREWS



**DECK ELITE**  
TOP DOWN DECKING SCREWS



**ANGLEPRO™**

# R4™ MULTI-PURPOSE FRAMING & DECKING SCREWS

## FASTER DRIVE FOR IMPROVED PRODUCTIVITY

GRK's R4™ Multi-purpose Screw is a versatile, code-approved fastener for hundreds of applications. Its feature-rich design provides a fast and reliable connection every time.

- **Fast Bite Tip:** Provides a fast start for one-step installation
- **Zip-Tip™:** Eliminates pre-drilling
- **W-Cut™:** Low torque, faster drive
- **Precision Fit:** Reduces wobble between R4 screws and GRK bits for improved productivity<sup>1</sup>
- **CEE Thread™:** Enlarges hole to reduce splitting<sup>2</sup>
- **Star Drive Recess:** Zero stripping, with 6 points of contact
- **Underhead Cutting Teeth:** Cuts wood fiber & provides flush seating
- **GRK Head Markings:** Easy identification of genuine GRK screws
- **Climatek™ Indoor/Outdoor Coating:** ICC-ES AC257 code approved for use in treated lumber<sup>3</sup>
- **Code Approved:** For structural applications (see ESR-3201)<sup>4</sup>
- For interior / exterior use

### 305 Stainless Steel

- For use within 1-15 miles of the coast
- For use in cedar, redwood, specialty hardwood, IPE, and Mangaris
- Corrosion resistance for wet environments
- Stain resistant in specialty wood

### 316 Stainless Steel

- For use within 1 mile of the coast
- Marine-Grade protection for superior corrosion resistance
- Superior Corrosion resistance for coastal environments
- Stain resistant in specialty wood

1. Precision Fit included on #9 and #10 sizes only
2. CEE Thread included on fasteners 2" and longer
3. For cedar, redwood and other naturally protected woods, GRK 305 and 316 stainless steel is recommended
4. ICC Code Approval for #9, #10, and #12 sizes only



ESR-3201



AC257 Treated  
Lumber Approved

	U.S (Std.) Size (Dia. x Length)	Bulk Part No.   Qty.	Contractor Packs (XL buckets) Part No.   Qty.	Pro Pack Part No.   Qty.	Handy Pack Part No.   Screw Qty.   MC Qty.
T-15	#6 x 1-1/4"	<b>00051</b>   13,000			
T-15	#8 x 1-1/4" #8 x 1-1/2" #8 x 1-3/4" #8 x 2" #8 x 2-1/2"			<b>01069</b>   1,300 <b>01073</b>   1,000 <b>01075</b>   925 <b>01077</b>   850 <b>01079</b>   650	<b>96080</b>   110   4 <b>96085</b>   110   4 <b>02075</b>   100   20 <b>02077</b>   100   20 <b>02079</b>   100   20
T-25	#9 x 1-1/2" #9 x 2" #9 x 2-1/2" #9 x 2-3/4" #9 x 3-1/8"	<b>00095</b>   5,200 <b>00099</b>   3,700 <b>00101</b>   2,900 <b>00103</b>   2,000 <b>00105</b>   1,900	<b>120990</b>   990 <b>121010</b>   900 <b>121050</b>   720	<b>01095</b>   820 <b>01099</b>   690 <b>01101</b>   575 <b>01103</b>   480 <b>01105</b>   425	<b>02095</b>   100   20 <b>103099</b>   110   4 <b>103101</b>   100   4 <b>103105</b>   80   4
T-25	#10 x 2-1/2" #10 x 3-1/8" #10 x 3-1/2" #10 x 4" #10 x 4-3/4"	<b>00133</b>   2,500 <b>00137</b>   1,500 <b>00139</b>   1,200 <b>00141</b>   1,000 <b>00143</b>   800	<b>95200</b>   630 <b>121410</b>   450	<b>01133</b>   470 <b>01137</b>   350 <b>01139</b>   300 <b>01141</b>   270 <b>01143</b>   230	<b>103133</b>   80   4 <b>103137</b>   70   4 <b>02139</b>   50   10 <b>103141</b>   50   4 <b>02143</b>   50   10
T-25	#12/14 x 5-5/8" #12/14 x 6-3/8"	<b>00173</b>   600 <b>00177</b>   1,000			<b>96089</b>   50   4 <b>02177</b>   50   9

	U.S (Std.) Size (Dia. x Length)	Bulk Part No.   Qty.	Pro Pack Part No.   Qty.	Handy Pack Part No.   Screw Qty.   MC Qty.
<b>R4™ SCREWS: 305 STAINLESS STEEL</b>				
T-25	#10 x 2-1/2" #10 x 3-1/8"	<b>25137</b>   1,500	<b>61633</b>   240 <b>61637</b>   210	<b>61733</b>   80   4 <b>61737</b>   70   4
<b>R4™ SCREWS: 316 STAINLESS STEEL</b>				
T-25	#10 x 2-1/2" #10 x 3-1/8"			<b>137133</b>   80   4 <b>137147</b>   70   4

- Pro Packs need to be ordered in multiples of two
- 2" bit included in Pro Packs. 1" bit with Handy Packs

# METAL CONNECTOR SCREW



ESR-2442



AC257 Treated Lumber Approved

## MAXIMIZE METAL CONNECTOR INSTALLATION SPEED

GRK's Metal Connector screws combine a precision fit star drive with a washer head to make installing metal connector hardware easier. Engineered with GRK's feature-rich design, these screws are made for pros who demand speed and structural strength.

- **Washer Head:** Designed for structural hardware connections
- **Fast Bite Tip:** Provides a fast start for one-step installation
- **W-Cut™:** Low torque, faster drive
- **Star Drive Recess:** Zero stripping, with 6 points of contact
- **Climatek™ Indoor/Outdoor Coating:** ICC-ES AC257 code approved for use in treated lumber<sup>1</sup>
- **Code Approved:** For structural applications (see ESR-2442)<sup>2</sup>

## APPLICATIONS:

- Joist Hangers
- Post Caps
- Post Bases



U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.   Qty.	Handy Pack Part No.   Qty.
#9 x 1-1/2"	29153   330	29151   110
#9 x 2-1/2"		29251   100
#10 x 1-1/2"	20153   300	20151   100
#10 x 2-1/2"		20251   80



T-25

1. For cedar, redwood and other naturally protected woods, GRK 305 and 316 stainless steel is recommended
2. ICC Code Approval for 1/4", 5/16", and 3/8" sizes only

# DECK ELITE DECKING SCREW



## SPEED. QUALITY. ELEVATED CRAFTSMANSHIP

GRK's Deck Elite screws are designed for use in wood deck boards and provide a quick drive and clean finish. Deck Elite screws start immediately in wood with a smooth, fast drive to increase productivity on the job and the tan color of the screw provides an ideal finish.

- **Tan Color:** Provides an ideal finish
- **Fast Bite Tip:** Provides a fast start for one-step installation
- **Zip-Tip™:** Eliminates pre-drilling
- **W-Cut™:** Low torque, faster drive
- **CEE Thread™:** Enlarges hole to reduce splitting<sup>1</sup>
- **Star Drive Recess:** Zero stripping, with 6 points of contact
- **GRK Head Markings:** Easy identification of genuine GRK screws
- **Corrosion Resistant Coating:** Resists rust and keeps decks looking new
- For use in wood deck boards, fencing, and deck rails, including pressure treated lumber<sup>2</sup>
- For interior / exterior use

1. CEE Thread included on fasteners 2" and longer
2. For cedar, redwood and other naturally protected woods, GRK 305 and 316 stainless steel is recommended

U.S (Std.) Size (Dia. x Length)	Contractor Packs (XL buckets) Part No.   Qty.	Pro Pack Part No.   Qty.	Handy Pack Part No.   Qty.
#8 x 2"	<b>40803</b>   1,080	<b>10803</b>   540	<b>30803</b>   110
#9 x 1-5/8"	<b>49159</b>   1,080	<b>19159</b>   540	<b>39159</b>   110
#9 x 2-1/2"	<b>49212</b>   800	<b>19212</b>   400	<b>39212</b>   100
#9 x 3"	<b>40903</b>   700	<b>10903</b>   350	<b>30903</b>   80

- Contractor Packs and Pro Packs need to be ordered in multiples of two
- 2" bit included in Pro Packs. 1" bit with Contractor Packs

# RSS™ STRUCTURAL RUGGED STRUCTURAL SCREWS



ESR-2442



AC257 Treated  
Lumber Approved

## EASY TO INSTALL LAG ALTERNATIVE

GRK's RSS™ Rugged Structural Screw is a structural fastener designed for ease of installation and the strongest of connections. RSS fasteners drive into most woods without the need for pre-drilling. The specially engineered design results in a low-effort installation, especially compared to conventional lag screws.

- **Fast Bite Tip:** Provides a fast start for one-step installation
- **Zip-Tip™:** Eliminates pre-drilling<sup>1</sup>
- **W-Cut™:** Low torque, faster drive
- **Precision Fit:** Reduces wobble between RSS screws and GRK bits for improved productivity<sup>2</sup>
- **Integrated Washer Head:** Maximum clamping force
- **Star Drive Recess:** Zero stripping, with 6 points of contact
- **GRK Head Markings:** Easy identification of genuine GRK screws
- **CEE Thread™:** Enlarges hole to reduce splitting<sup>3</sup>
- **Climatek™ Indoor/Outdoor Coating:** ICC-ES AC257 code approved for use in treated lumber<sup>4</sup>
- **Code Approved:** For structural applications (see ESR-2442<sup>5</sup>)
- **Black Structural Screw:** Black coating matches decorative hardware
- For interior / exterior use

### 305 Stainless Steel

- For use within 1-15 miles of the coast
- For use in cedar, redwood, specialty hardwood, IPE, and Mangaris
- Corrosion resistance for wet environments
- Stain resistant in specialty wood

1. Zip-Tip included on fasteners 2-1/2" and longer
2. Precision Fit included on 5/16" sizes only
3. CEE Thread included on fasteners 3-1/8" and longer
4. For cedar, redwood and other naturally protected woods, GRK 305 and 316 stainless steel is recommended
5. ICC Code Approval for 1/4", 5/16", and 3/8" sizes only

	U.S (Std.) Size (Dia. x Length)	Bulk Part No.   Qty.	Pro Pack Part No.   Screw Qty.   MC Qty.	Handy Pack Part No.   Screw Qty.   MC Qty.	Individually Tagged Part No.   Screw Qty.   MC Qty.
T-25	#10 x 2-1/2" #10 x 3-1/8"	<b>10133</b>   1,000 <b>10137</b>   80	<b>11137</b>   236	<b>12133</b>   50   10	
T-25	1/4" x 1-1/2" 1/4" x 2" 1/4" x 2-1/2" 1/4" x 3-1/2" 1/4" x 3-1/8"	<b>10151</b>   1,000 <b>10155</b>   80 <b>10157</b>   700 <b>10161</b>   500		<b>12155</b>   50   10 <b>12161</b>   50   10	<b>90305</b>   75   1 <b>90306</b>   75   1
T-30	5/16" x 2-1/2" 5/16" x 3-1/8" 5/16" x 3-1/2" 5/16" x 4" 5/16" x 5-1/8" 5/16" x 6"	<b>10217</b>   600 <b>10221</b>   500 <b>10223</b>   500 <b>10225</b>   400 <b>10231</b>   300 <b>10235</b>   300	<b>12221</b>   100   2 <b>12223</b>   100   2 <b>12225</b>   100   2 <b>12231</b>   50   9 <b>12235</b>   50   9	<b>12217</b>   100   9 <b>14221</b>   25   10 <b>95307</b>   45   4 <b>14225</b>   25   10 <b>14231</b>   25   10	<b>96001</b>   50   1 <b>90307</b>   50   1 <b>96005</b>   50   1 <b>96010</b>   50   1 <b>96015</b>   40   1
T-40	3/8" x 4" 3/8" x 6" 3/8" x 7-1/4" 3/8" x 8" 3/8" x 10" 3/8" x 12" 3/8" x 14-1/8" 3/8" x 16"	<b>10275</b>   400 <b>10281</b>   300 <b>10285</b>   200 <b>10287</b>   300 <b>10293</b>   300 <b>10299</b>   300 <b>10311</b>   100	<b>12275</b>   50   9 <b>12281</b>   50   2 <b>12285</b>   50   2 <b>12287</b>   50   2 <b>12293</b>   50   2 <b>12299</b>   50   2 <b>12307</b>   50   2 <b>12311</b>   50   2		<b>96020</b>   25   1 <b>96025</b>   25   1 <b>96030</b>   20   1

#### RSS™ BLACK STRUCTURAL SCREW

T-30	5/16" X 3-1/8" 5/16" X 4" 5/16" X 5-1/8" 5/16" X 6"	<b>95314</b>   500 <b>95414</b>   400 <b>95514</b>   300 <b>95614</b>   300	<b>95313</b>   100 <b>95413</b>   100 <b>95612</b>   25	<b>95312</b>   25 <b>95412</b>   25 <b>95512</b>   25	<b>95311</b>   1 <b>95411</b>   1 <b>95511</b>   1 <b>95611</b>   1
	3/8" X 8" 3/8" X 10" 3/8" X 12"				<b>93811</b>   1 <b>93101</b>   1 <b>93121</b>   1

#### RSS™ JTS - JOIST AND TRUSS SCREW

T-25	1/4" x 5" 1/4" x 6-3/4"	<b>91743</b>   300		<b>93735</b>   50 <b>93743</b>   50	
------	----------------------------	--------------------	--	--	--

#### RSS™ SCREWS: 305 STAINLESS STEEL

	U.S (Std.) Size (Dia. x Length)	Bulk Part No.   Qty.	Handy Pack Part No.   Screw Qty.   MC Qty.
T-30	5/16" x 3-1/8" 5/16" x 4" 5/16" x 5-1/8" 5/16" x 6"		<b>30221</b>   500 <b>30225</b>   400 <b>30235</b>   300

# AUGERBOLT™

## THROUGH BOLT FASTENING



## THROUGHBOLTING MADE SIMPLE

AugerBolt™ simplifies the installation process of throughbolts by combining the drilling and install steps and eliminating loose components.

- **Integrated Washer head:** Fewer components
- **Recessed Tip:** One step install
- **Auger Drill Bit Included:** For faster drilling

Nuts and washers included in each package

## APPLICATIONS:

- Deck Post to Beam



U.S (Std.) Size (Dia. x Length)	Part No.	Qty. (Bolts, Nuts, Washers)	Qty. (Auger Bit)
1/2" x 7"	<b>81274</b>	2	-
	<b>81270</b>	2	1
	<b>81273</b>	4	-
	<b>81271</b>	10	1
	<b>81272</b>	24	1



Treated  
Lumber Approved

## GET A PREMIUM AESTHETIC FINISH WITH SECURE LONG-LASTING STRENGTH

The AnglePro™ Hidden Fastening System provides a premium aesthetic by eliminating the visibility of screws. The AnglePro™ guides Deck Elite Hidden Deck Fasteners precisely between the gaps of each board leaving a perfect finish.

Deck Elite Hidden Deck Fasteners are designed for use with the AnglePro tool. Combined with the trim head, these fasteners provide an aesthetic finish with the clamping power that rivals top down decking fasteners.

### TOOL:

- **Adjustable Gapping:** Adjust topboard gapping between 0.12" - 0.3"
- **Adjustable Width:** Adjust to topboard width from 3.35" - 5.9"
- **Precision Guides:** Quick, accurate fastening
- **Reinforced Handle:** Jobsite Durability


### FASTENERS:

- **Drill Point Tip:** Reduces board splitting and provides a clean finish
- **Dual Thread Form:** Delivers superior clamping force, replicating the holding power of topdown fastening
- **Drill Point Tip:** 6 Points of contact eliminates stripping

## APPLICATIONS:

- Top Deck Boards


Tool Model	Part No.   Qty.
AnglePro Tool	<b>43126</b>   1
U.S (Std.) Size (Dia. x Length)	Part No.   Qty.
#9 x 2-3/8"	<b>10923</b>   100 <b>19238</b>   350
#9 x 2-3/8" Stainless Steel	<b>39238</b>   200



AC257 Treated  
Lumber Approved



# FIN/TRIM™ FINISHING TRIM HEAD SCREWS

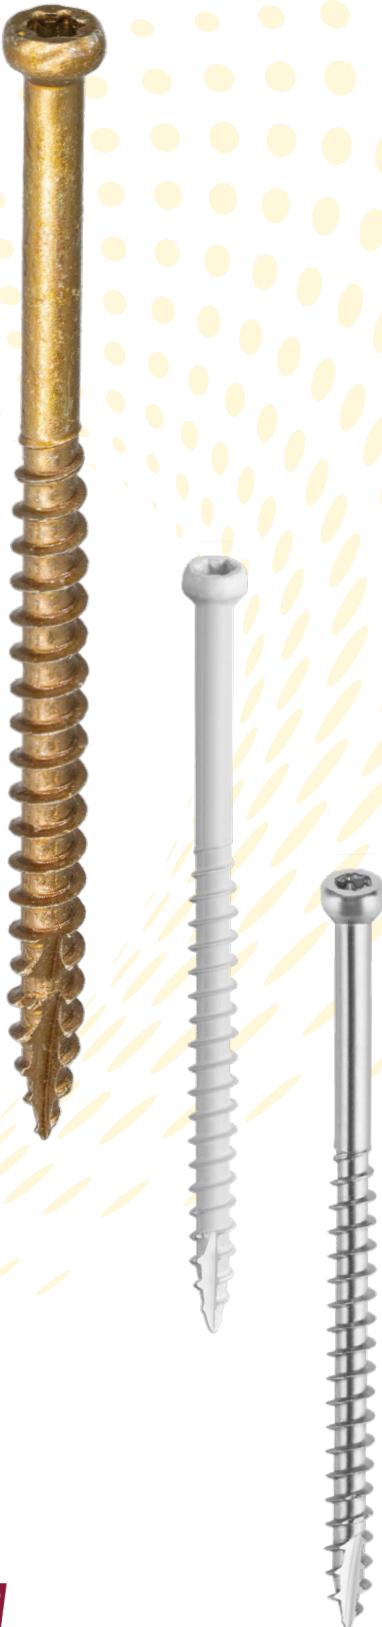

ESR-3201



AC257 Treated  
Lumber Approved

## PROFESSIONAL FINISH, PROFESSIONAL LOOK

GRK's Fin/Trim™ screws are an excellent choice for most fine carpentry applications, as well as window extension jambs, joining cabinets and more. A combination of the smallest screw head available and code approved structural performance means the most secure, concealed fastening in the industry.

- **Trim Head:** Clean, finished look
- **Star Drive Recess:** Zero stripping, with 6 points of contact
- **W-Cut™:** Low torque, faster drive
- **Zip-Tip™:** Eliminates pre-drilling
- **Climatek™ Indoor/Outdoor Coating:** ICC-ES AC257 code approved for use in treated lumber<sup>1</sup>
- **Code Approved:** For structural applications (see ESR-3201)
- For interior / exterior use

### 305 Stainless Steel

- For use within 1-15 miles of the coast
- For use in cedar, redwood, specialty hardwood, IPE, and Mangaris
- Corrosion resistance for wet environments
- Stain resistant in specialty wood

### 316 Stainless Steel

- For use within 1 mile of the coast
- Marine-Grade protection for superior corrosion resistance
- Superior Corrosion resistance for coastal environments
- Stain resistant in specialty wood

1. For cedar, redwood and other naturally protected woods, GRK 305 and 316 stainless steel is recommended

	U.S (Std.) Size (Dia. x Length)	Bulk Part No.   Qty.	Pro Pack Part No.   Qty.	Handy Pack Part No.   Screw Qty.   MC Qty.
T-10	#8 x 1-1/4"			<b>96055</b>   100   6
	#8 x 1-1/2"			<b>119724</b>   100   6
	#8 x 2"		<b>116728</b>   510	<b>119728</b>   100   6
	#8 x 2-1/2"	<b>15730</b>   3,500	<b>16730</b>   605	<b>119730</b>   100   6
	#8 x 3-1/8"	<b>15734</b>   2,500	<b>115734</b>   300	<b>119734</b>   100   6
T-15	#9 x 4"			<b>117760</b>   50   4
	#9 x 5"			<b>117766</b>   50   4
<b>WHITE FIN/TRIM™</b>				
T-10	#8 x 2"		<b>16828</b>   605	<b>96060</b>   100   4
	#8 x 2-1/2"		<b>16830</b>   505	<b>96065</b>   100   4

- Pro Packs need to be ordered in multiples of two
- 2" bit included in Pro Packs. 1" bit with Handy Packs

<b>FIN/TRIM™ SCREWS: 305 STAINLESS STEEL</b>				
T-10	#8 x 1-1/2"			<b>37724</b>   100   20
	#8 x 2"		<b>61728</b>   510	<b>67728</b>   100   6
	#8 x 2-1/2"		<b>61730</b>   420	<b>67730</b>   100   6
	#8 x 3-1/8"		<b>36734</b>   385	<b>37734</b>   100   10
<b>FIN/TRIM™ SCREWS: 316 STAINLESS STEEL</b>				
T-10	#8 x 2-1/2"			<b>147730</b>   100   6

- 2" bit included in Pro Packs. 1" bit with Handy Packs



## APPLICATIONS:

- Trim Work
- Cabinets
- Fine Carpentry

# RT COMPOSITE™ EXTERIOR TRIM SCREW



## INSTALL RIGHT THE FIRST TIME

The RT Composite™ screw is a specially designed fastener for attaching composite and cellular PVC materials. Reverse threading under the head of the fastener helps the screw head disappear beneath the surface of the classic wood composite material while reducing or eliminating the dimple that is common in this substrate.

- **Trim Head:** Clean, finished look
- **Underhead Reverse Thread:** Reduces or eliminates mushrooming
- **Star Drive Recess:** Zero stripping, with 6 points of contact
- **W-Cut™:** Low torque, faster drive
- **Zip-Tip™:** Eliminates pre-drilling
- **Climatek™ Indoor/Outdoor Coating:** ICC-ES AC257 code approved for use in treated lumber<sup>1</sup>
- Available in Climatek or White Climatek coated finish
- For interior / exterior use

### 305 Stainless Steel

- For use within 1-15 miles of the coast
- For use in cedar, redwood, specialty hardwood, IPE, and Mangaris
- Corrosion resistance for wet environments
- Stain resistant in specialty wood



ESR-3201



AC257 Treated  
Lumber Approved

1. For cedar, redwood and other naturally protected woods, GRK 305 and 316 stainless steel is recommended

	U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.   Qty.	Handy Pack Part No.   Screw Qty.   MC Qty.
T-10	#8 x 2"	16077   725	119077   100   6
	#8 x 2-1/2"	16079   605	119079   100   6
	#8 x 3-1/8"	16083   514	119083   100   6
T-15	#9 x 2-1/2"	16101   408	
	#9 x 3-1/8"	16105   348	
<b>WHITE RT COMPOSITE™</b>			
T-10	#8 x 2"	16628   605	17628   100   20
	#8 x 2-1/2"	16630   505	96075   100   4
	#8 x 3-1/8"		17634   100   10
<ul style="list-style-type: none"> <li>• Pro Packs need to be ordered in multiples of two</li> <li>• 2" bit included in Pro Packs. 1" bit with Handy Packs</li> </ul>			
<b>RT COMPOSITE™ TRIM SCREWS: 305 STAINLESS STEEL</b>			
T-15	#8 x 2"	36077   600	
	#8 x 2-1/2"	36079   560	
	#9 x 2-1/2"	36101   365	
<ul style="list-style-type: none"> <li>• 2" bit included in Pro Packs. 1" bit with Handy Packs</li> </ul>			



## APPLICATIONS:

- Exterior Trim
- cPVC Deck Boards
- Hidden Fastening Systems

# LOW PROFILE CABINET™ CABINET SCREWS



## QUICK AND SECURE INSTALLATION

GRK's Cabinet screws are designed for use in cabinet construction and installation. Cabinet screws are manufactured in a #8 gauge (4 mm) diameter for universal size convenience.

- **Star Drive Recess:** Zero stripping, with 6 points of contact
- **Zip-Tip™:** Eliminates pre-drilling<sup>1</sup>
- **W-Cut™:** Low torque, faster drive
- **Washer Head:** Creates a flush, clean hold for a strong and secure installation
- **Climatek™ Indoor/Outdoor Coating:** ICC-ES AC257 code approved for use in treated lumber<sup>2</sup>
- **White Cabinet Coating:** Color matched for interior applications
- For interior / exterior<sup>3</sup> use



AC257 Treated  
Lumber Approved

1. Zip-Tip included on fasteners 1-1/4" and longer
2. For cedar, redwood, and other naturally-protected woods, GRK recommends stainless steel fasteners
3. White Cabinet Coating only suitable for interior use

U.S (Std.) Size (Dia. x Length)	Bulk Part No.   Qty.	Pro Pack Part No.   Qty.	Handy Pack Part No.   Screw Qty.   MC Qty.
T-15	#8 x 1"		<b>96050</b>   100   6
	#8 x 1-1/4"	<b>10069</b>   4,000	<b>114069</b>   100   6
	#8 x 1-1/2"	<b>10073</b>   3,000	<b>114073</b>   100   6
	#8 x 2"	<b>10077</b>   2,000	<b>113077</b>   100   4
	#8 x 2-1/2"	<b>10079</b>   1,500	<b>113079</b>   100   4
	#8 x 2-3/4"		<b>113081</b>   100   4
	#8 x 3-1/8"	<b>10083</b>   1,000	<b>114083</b>   50   6
<b>WHITE LOW PROFILE™ CABINET SCREWS</b>			
T-15	#8 x 1-1/4"		<b>120680</b>   80   6
	#8 x 1-1/2"		<b>120670</b>   80   6
	#8 x 2-1/2"		<b>120660</b>   80   6

- Pro Packs need to be ordered in multiples of two
- 2" bit included in Pro Packs



## APPLICATIONS:

- Cabinet Construction & Installations
- Trim & Moulding
- Light-Duty Framing

# TOP STAR™ ADJUSTABLE SHIM SCREWS



## FOR PLUMB INSTALLATION OF WOODEN DOORS AND WINDOWS. NO MORE SHIMS!

GRK's adjustable Top Star™ shim screw is a screw within a screw that allows you to install wooden doors or windows without the use of shims. The quick and easy system reduces labor and allows for hassle free adjustment to ensure plumb installation.

The 4-point top sleeve provides a secure hold into the frame, while the GRK Star Drive bit is used to make the adjustments needed for a perfect, shim-free installation.

The Top Star's highly-engineered system can be used for installation of wooden doors, windows, insulation, paneling, wall-units, and cabinets.

- **Recessed Star Drive:** Zero stripping, with 6 points of contact
- **4-point 3/8" Diameter Threaded Sleeve** provides a secure hold in your wooden frame
- **Micro-Adjustments** allow for an absolute plumb installation
- **Use with GRK's Top Star™ Crown and T-15 Star Bit System**
- **Zinc Plated** finish for lasting durability
- **For Shim Free Installation** of wooden doors, windows, insulations, paneling, built-in wall units, and cabinets

U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.   Qty.
3/8" x 3-1/8"	20161   100





### The Complete Top Star™ System Includes:

Bit

Crown

Threaded Sleeve

- Pro Packs need to be ordered in multiples of two



## APPLICATIONS:

- Wooden Doors
- Windows
- Insulation

# CALIBURN™ CONCRETE SCREW



## HEAVY DUTY CONCRETE AND MASONRY FASTENER

Caliburn™ Concrete screws are professionally engineered fasteners with a patented thread design for ease of driving the screw into concrete and similar applications.

- **Star Drive Recess:** Zero stripping, with 6 points of contact
- **Aggressive Heavy Duty Threads** lock into concrete and can be removed/reinserted without screw damage
- **Caliburn™ XL:** washer head design for superior holding power
- **Climatek™ Indoor/Outdoor Coating:** ICC-ES AC257 code approved for use in treated lumber
- Ideal for use in anchoring to concrete or wood to concrete applications including basement framing and sheds

## APPLICATIONS:

- Wood to Concrete Framing
- Electrical and Plumbing Fixtures
- Caliburn XL for Heavy Duty Concrete Anchoring




AC257 Treated  
Lumber Approved



U.S (Std.) Size (Dia. x Length)	Bulk Part No.   Qty.	Handy Pack Part No.   Screw Qty.   MC Qty.
<b>Caliburn™ XL</b>		
19/64" x 2-3/4"		<b>57774</b>   25   10
19/64" x 3-1/2"	<b>55778</b>   400	<b>57778</b>   25   10
19/64" x 5"		<b>57785</b>   25   10

- 1" bit included in Handy Packs

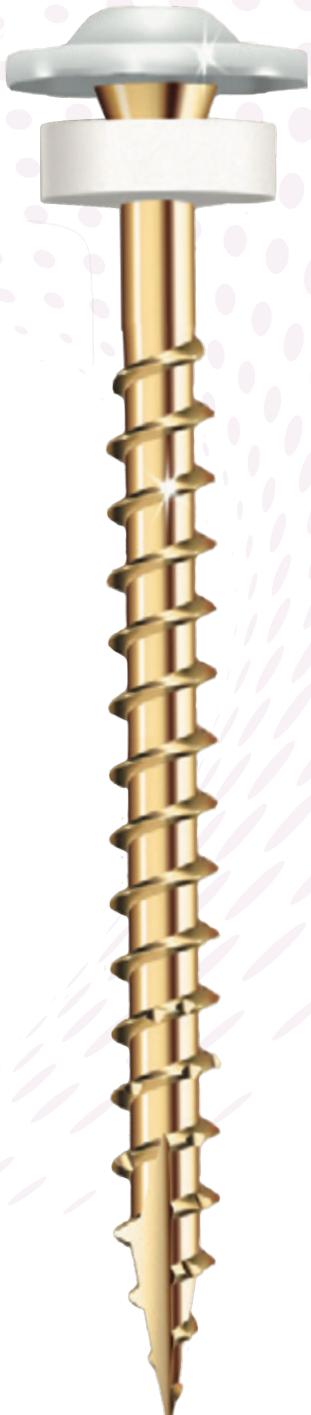

T-25

## POWDER COATED HEAD FOR A CLEAN FINISHED LOOK

This screw has an integrated washer-head and is complemented by a rubber washer below the screw head. This feature also helps protect the washer from prolonged exposure to the sun for long lasting, secure siding installations.

- **White Color, Low Profile Head** produces a clean, finished look which is preferred for moldings, closet organizers, and metal siding
- **Washer Head** increases holding power
- **Rubber Washer**: seals drill hole from the elements
- **W-Cut™ Thread Design** tiny saw blades reduce torque by cutting through the material
- **ZIP-TIP™** for easy starts and no pre-drilling
- For use in interior or exterior applications including metal siding, garage door trim, and even closet organizers. Not for use with treated lumber

## APPLICATIONS:

- Metal Siding
- Garage Door Trim
- Closet Organizers



U.S (Std.) Size (Dia. x Length)	Bulk Part No.   Qty.
#9 x 1-1/2"	<b>40090</b>   3,000

• 1" bit included in Handy Packs

MSS™

CALIBURN™

# STAR DRIVE BITS

## CROWN / BIT



Bit Size	Bit Color	Fits	Bulk Part No.   Qty.	Carded Part No.   Qty.
T-10 2" T-10 3"	Yellow Yellow	Trim™ Head #8		187419   2 87421   2
T-15 2" T-15 3"	Red Red	R4™ Screw #6 & 8 Trim™ Head #9 Cabinet™ Screw		187427   2 87429   2
T-20 2"	Purple			187435   2
T-25 2" T-25 3"	Green Green	R4™ #9,10 &12 RSS™ #10 & 1/4" MSS™ #9	86443   25	187443   2 87445   2
T-30 2" T-30 3"	Black Black	RSS™ Structural Screw 5/16" Caliburn™ & Caliburn PH™	86451   25	187451   2 87453   2
T-40 2"	Blue	Caliburn XL™ Screws RSS™ Structural Screw 3/8"		187459   2



## STAR DRIVE BITS & ACCESSORIES





Tapcon® is the #1 recognized screw anchor brand in the industry. For decades, Tapcon has helped professionals get their concrete anchoring jobs done right the first time, every time.

The blue, corrosion-resistant coating enables our anchors to withstand the harshest conditions, and their unmatched performance (30% less torque and 20% more holding power) in concrete, block and brick applications make them an excellent alternative to expansion anchors, plugs and lag shields.

For quality, strength, and ease of installation, nobody matches the confidence pros get from using the original true blue screw.





# TAPCON® CONCRETE SCREW ANCHORS



## NOTHING ANCHORS LIKE A TAPCON.

Tapcon concrete anchors deliver the ease of use, superior precision, and unparalleled performance that professionals demand.

- **Eliminate bit slips** and increase productivity with star recess on flat head Tapcon anchors
- **Resist head snaps** and spin outs with under-head ribs on hex head Tapcon anchors
- **Superior holding strength** for confidence in a job done right
- **Corrosion resistant**, long lasting performance with Climaseal™ coating
- **WERCS threadform** allows for easy installation across a variety of masonry substrates
- **ICC-ES** recognized for use in concrete and masonry (ESR-2202 & ESR-1671)

## APPLICATIONS:

### Star Head

- Furring Strips
- Wood Framing
- Window Frames

### Hex Head

- Electrical Boxes



ESR-1671



ESR-2202

U.S (Std.) Size (Dia. x Length)	Large Bucket Part No.   Qty.	Bucket Part No.   Qty.	Lg. Clam Part No.   Qty.	Med. Pack Part No.   Qty.	Small Pack Part No.   Qty.
<b>STAR HEAD</b>					
3/16" x 1-1/4"	28731   450	28550   225	28350   75	28250   25	28150   8
3/16" x 1-3/4"	28655   450	28555   225	28355   75	28255   25	28155   8
3/16" x 2-1/4"		28560   225	28360   75	28260   25	28160   8
3/16" x 2-3/4"		28565   225	28365   75	28265   25	28165   8
3/16" x 3-1/4"		28507   150	28307   75		28107   8
1/4" x 1-3/4"		28575   225	28375   75	28275   25	28175   8
1/4" x 2-1/4"		28580   225	28380   75	28280   25	28180   8
1/4" x 2-3/4"		28585   150	28385   75	28285   25	28185   8
1/4" x 3-3/4"			28395   75	28390   25	28295   8
1/4" x 4"			28304   75	28397   25	28204   8
<b>HEX HEAD</b>					
3/16" x 1-1/4"		24500   225	24300   75	24200   25	24100   8
3/16" x 1-3/4"			24305   75	24205   25	24105   8
3/16" x 2-3/4"			24310   75	24210   25	24110   8
1/4" x 1-1/4"	24711   450	24515   225	24315   75	24215   25	24115   8
1/4" x 1-3/4"		24520   225	24320   75	24220   25	24120   8
1/4" x 2-1/4"		24525   225	24325   75	24225   25	24125   8
1/4" x 2-3/4"		24530   150	24330   75	24230   25	24130   8
1/4" x 3-1/4"		24501   150	24301   75		24101   8
1/4" x 3-3/4"			24340   75	24335   25	24240   8
1/4" x 4"				24345   25	24245   8
1/4" x 5"				24400   25	
<b>BLACK TAPCON STAR HEAD</b>					
3/16" x 1-3/4"			28373   75		28173   8
3/16" x 2-3/4"			28368   75		28168   8
3/16" x 3-3/4"			28393   75		28193   8
1/4" x 2-3/4"			28314   75		28114   8
<b>BLACK TAPCON HEX HEAD</b>					
1/4" x 1-1/4"			24311   75		24111   8
1/4" x 1-3/4"			24343   75		24143   8
1/4" x 2-1/4			24313   75		24113   8
1/4" x 2-3/4"			24389   75		24189   8
1/4" x 3-3/4"			24394   75		24194   8

• Pre-drill bit included in Star Head and Hex Head packs of 75 quantity and larger

# TAPCON®

## CONCRETE SCREW ANCHORS

U.S (Std.) Size (Dia. x Length)	Bulk Part No.   Qty.	Bucket Part No.   Qty.	Lg. Clam Part No.   Qty.	Med. Pack Part No.   Qty.	Small Pack Part No.   Qty.
<b>WHITE ULTRASHIELD TAPCON - STAR HEAD</b>					
3/16" x 1-3/4"		28571   225	28371   75		28171   8
3/16" x 2-1/4"		28572   225	28372   75		28172   8
3/16" x 2-3/4"		28567   225	28367   75	28267   25	28167   8
<b>WHITE ULTRASHIELD TAPCON - HEX HEAD</b>					
1/4" x 1-1/4"			24341   75		24141   8
1/4" x 1-3/4"			24342   75		24142   8
1/4" x 2-1/4"			24323   50		
<b>WHITE ULTRASHIELD TAPCON - PHILLIPS HEAD</b>					
1/4" x 2-3/4"	24688   1,000	24588   150	24388   75	24288   25	24188   8
1/4" x 3-1/4"	24691   1,000	24591   150	24391   75		
1/4" x 3-3/4"			24392   75		
<b>410 STAINLESS STEEL TAPCON</b>					
3/16" x 1-3/4"					26155   8
3/16" x 2-3/4"					26165   8
1/4" x 1-3/4"					26120   8
1/4" x 2-3/4"					26130   8
<b>MAXI-SET TAPCON</b>					
1/4" x 2-1/4"			24326   50		
<b>TAPCON DRILL BITS</b>					
5/32" x 3-1/2"					11256   1
5/32" x 4-1/2"					11247   1
5/32" x 5-1/2"					11363   1
3/16" x 3-1/2"					11257   1
3/16" x 4-1/2"					11248   1
3/16" x 5-1/2"					11362   1
5/32" x 7" SDS					11492   1
3/16" x 7" SDS					11491   1
1/4" x 7" SDS					11493   1
3/8" x 8" SDS					11494   1
1/2" x 10" SDS					11495   1
<b>TAPCON PRO INSTALLATION KIT</b>					
Tapcon Pro Install Tool					79013   1

• Pre-drill bit included in Star Head and Hex Head packs of 75 quantity and larger



**TAPCON® CONCRETE SCREW ANCHORS**

# TAPCON+® HEAVY DUTY CONCRETE SCREW ANCHORS



## STRONGER. FASTER. EASIER.

Tapcon+ unmatched performance in concrete, block and brick applications make them an excellent alternative to expansion anchors, plugs, lag shields. Available with a blue corrosion resistant coating that enables them to withstand the harshest conditions and mechanically galvanized for use in exterior applications and pressure treated lumber. That's why when pros look for quality, strength and ease of installation, they choose Tapcon.

- **ICC-ES Approved** for use in uncracked & cracked concrete and seismic conditions (ESR-3699)
- **Heavy-Duty Holding Power** in all concrete conditions
- **Flexibility:** To install closer to the edge & closer together with confidence
- **Threaded Design:** Flexible heavy duty alternative to expansion anchors
- **Precision Fit:** A long-standing reputation for quality, strength, and ease of installation from industry professionals
- **Blue Climaseal™ Coating:** Corrosion resistance to maintain long lasting quality
- **Mechanically Galvanized:** Approved for use in exterior applications and pressure treated lumber



ESR-3699



ICC-ES ESR-3699  
For use in concrete

U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.   Qty.	Handy Pack Part No.   Qty.	Small Pack Part No.   Qty.
<b>STANDARD TAPCON®+</b>			
5/16" x 2-1/4"		<b>24292</b>   15	<b>24192</b>   4
5/16" x 3"		<b>24293</b>   15	<b>24193</b>   4
3/8" x 1-3/4"	<b>11440</b>   10		<b>50440</b>   2
3/8" x 2-1/4"	<b>11441</b>   10		<b>50441</b>   2
3/8" x 3"	<b>11413</b>   10		<b>50403</b>   2
3/8" x 4"	<b>11414</b>   10		<b>50404</b>   2
3/8" x 5"			<b>50445</b>   2
3/8" x 6"			<b>50446</b>   2
1/2" x 3"	<b>11447</b>   10		<b>50447</b>   2
1/2" x 4"	<b>11420</b>   10		<b>50408</b>   2
1/2" x 5"	<b>11449</b>   10		<b>50449</b>   2
1/2" x 6"	<b>11421</b>   10		<b>50426</b>   2
5/8" x 6"			<b>50416</b>   2
<b>MECHANICALLY GALVANIZED TAPCON®+</b>			
1/2" x 6"			<b>50326</b>   2



## APPLICATIONS:

- Sill Plates
- Post Cap Connector
- Ledger Board
- Heavy Equipment
- Industrial Racking/Shelving
- Modular Walls
- Machinery

# **Trubolt WEDGE ANCHORS**

## **HEAVY DUTY CONCRETE ANCHORS**



## **MAXIMUM STRENGTH FOR HEAVY-DUTY CONCRETE ANCHORING**

Trubolt Wedge Anchors offer maximum strength and ultimate flexibility making them the PRO choice for heavy-duty anchoring. This wedge anchor features a high-strength body that is built to resist tension and shear loads.



Trubolt Wedge  
Anchor



ESR-2251

T7+ Adhesive  
Anchor



ESR-3903



ESR-3951

## **APPLICATIONS:**

- Machinery
- Sill plate installation



U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.   Qty.	Handy Pack Part No.   Qty.	Poly-Bag Part No.   Qty.
1/4" x 2-1/4"		<b>12377</b>   25	<b>50080</b>   1
3/8" x 2-1/4"	<b>12367</b>   50	<b>12015</b>   15	<b>50081</b>   1
3/8" x 3"	<b>03014</b>   50		<b>50082</b>   1
3/8" x 3-3/4"	<b>12370</b>   50	<b>12016</b>   15	<b>50083</b>   1
3/8" x 5"		<b>12022</b>   15	<b>50084</b>   1
1/2" x 2-3/4"			<b>50085</b>   1
1/2" x 3-3/4"	<b>12371</b>   25	<b>12017</b>   10	<b>50181</b>   1
1/2" x 4-1/4"	<b>12372</b>   25	<b>12020</b>   10	<b>50086</b>   1
1/2" x 5-1/2"	<b>12373</b>   25		<b>50087</b>   1
1/2" x 7"			<b>50088</b>   1
5/8" x 5"	<b>12310</b>   10		<b>50089</b>   1
5/8" x 6"	<b>03041</b>   10		
5/8" x 7"	<b>03044</b>   10		<b>51030</b>   1
5/8" x 8-1/2"			<b>50305</b>   1
3/4" x 5-1/2"	<b>02992</b>   10		<b>51001</b>   1
<b>HOT-DIPPED GALVANIZED</b>			
1/2" x 5-1/2"HDG		<b>12021</b>   10	<b>50303</b>   1
1/2" x 7" HDG	<b>12029</b>   10		<b>50307</b>   1
5/8" x 6" HDG	<b>03555</b>   10		

## T7+ ADHESIVE ANCHORS

### HIGH STRENGTH ADHESIVE ANCHORING SOLUTIONS



Red Head T7+ concrete adhesive anchor features a fast cure formula that meets the highest standards of building codes. T7+ adhesive is approved for cracked and uncracked concrete and seismic applications. The versatile formula is easy to dispense at all temperatures and is moisture resistant for damp or submerged applications.

Size (Fl. Oz.)	Part No.   Qty.	Cure Time
9.5 Fl. Oz Cartridge	<b>07112</b>   1	30 mins at 90°F

## APPLICATIONS:

- Concrete
- Grout-filled and hollow brick
- Clay tile

# RED HEAD® CONCRETE ANCHORS

## CONCRETE ANCHORS




SLEEVE ANCHOR

## VERSATILE ANCHORING SOLUTIONS FOR CONCRETE & BUILDING

Red Head can help you get any job done right, from heavy-duty ceiling applications to light-duty work in block and brick.

Our sleeve anchor is our most versatile anchor with the ability to fasten in block, brick, masonry, and solid concrete.

For a lighter duty project, Poly-Set and Hammer-Set are great choices for block, brick and concrete and allow for a quick and easy installation. For heavy-duty overhead applications, use our Drop-In anchors. Use the complete family of anchors and SDS bits to ensure precise hole depth and diameter when using our anchors.

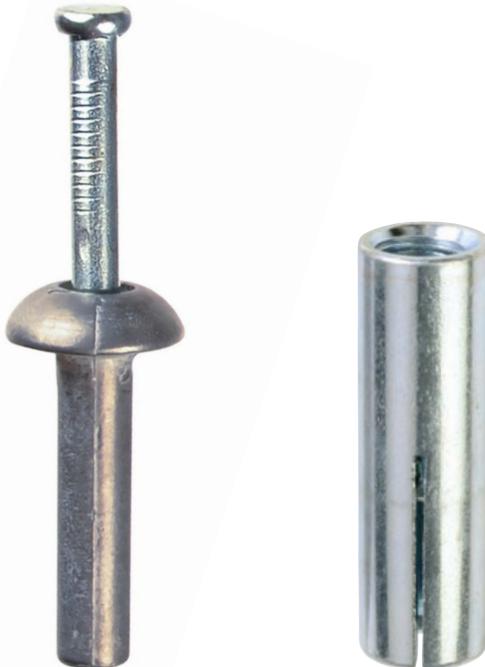

HAMMER-SET

DROP-IN

U.S (Std.) Size (Dia. x Length)	Bucket Part No.   Qty.	Pro Pack Part No.   Qty.	Handy Pack Part No.   Qty.	Poly-Bag Part No.   Qty.
<b>SLEEVE ANCHORS</b>				
1/4" x 2-1/4" Acorn Hd				50122   1
1/4" x 2-1/4" Threshold Hd				50123   1
1/4" x 3-1/8" Flat Hd				50121   1
5/16" x 1-1/2" Hex Hd				50112   1
5/16" x 2-1/2" Hex Hd				50113   1
3/8" x 1-7/8" Hex Hd		11281   50	11013   15	50114   1
3/8" x 3" Hex Hd				50115   1
1/2" x 2-1/4" Hex Hd		11283   25	11014   10	50116   1
1/2" x 3" Hex Hd		11285   25	11018   10	50117   1
1/2" x 4" Hex Hd				50118   1
5/8" x 4-1/4" Hex Hd				50119   1
5/8" x 6" Hex Hd				50120   1
<b>HAMMER-SET ANCHORS</b>				
1/4" x 1"	35510   225	35300   75	35200   25	
1/4" x 1-1/2"	35511   150	35303   50	35203   15	
1/4" x 2"	35512   150	35305   50	35205   15	
1/4" x 3"	35513   75	35207   25		
<b>DROP-IN ANCHORS</b>				
3/8" Anchor		01891   50		50125   1
1/2" Anchor				50126   1
3/8" Setting Tool				07499   1
1/2" Setting Tool				07501   1



## APPLICATIONS:

- Conduit Clips
- Drywall tracks
- Curtain rods
- Shelving
- Shelf Ledgers
- Racking
- Secure Transformers
- Light Fixtures

# RAMSET® TOOLS

## PINS + LOADS



Cobra+



MasterShot



TriggerShot



HammerShot



ESR-1799



IFS Conversion Kit

- 1 Cobra+ IFS Piston
- 1 Cobra+ IFS Barrel
- 1 Cobra+ IFS Buffer

ESR-2690

## DURABLE. STURDY. POWERFUL.

From concrete to steel, Ramset has the tool to help you get the job done on time. Ramset is designed with speed and productivity in mind. With innovative solutions we provide you with the best anchoring experience.


- Powder actuated tools for concrete or steel
- Drives jobsite speed through quick and efficient fastening
- Market leading tool innovations help you get the job done right
- The Powder Actuated Tool choice for PROs

Item/Tool	Part No.   Qty.
<strong>POWDER ACTUATED TOOLS</strong>	
<strong>Cobra+ .27 Caliber Semi-Automatic Powder Actuated Tool</strong>	<strong>16944   1</strong>
<strong>MasterShot .22 Caliber Single-Shot Powder Actuated Tool</strong>	<strong>40088   1</strong>
<strong>TriggerShot .22 Caliber Single-Shot Powder Actuated Tool</strong>	<strong>40066   1</strong>
<strong>HammerShot .22 Caliber Single-Shot Powder Actuated Tool</strong>	<strong>00022   1</strong>
<strong>ACCESSORIES</strong>	
<strong>Ramset Cobra+ IFS Insulation Fastening System Conversion Kit</strong>	<strong>16900   1</strong>

Compatible with Ramset Cobra+ Tools  
Part No. 16942 or 16944

U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.   Qty.	Handy Pack Part No.   Qty.
<b>DRIVE PINS</b>		
.300 x 1/2"	<b>06171</b>   100	
.300 x 3/4"	<b>00747</b>   100	
.300 x 1"	<b>00759</b>   100	
.300 x 1-1/2"	<b>00774</b>   100	
.300 x 2"	<b>00780</b>   100	
.300 x 2-1/2"	<b>00786</b>   100	<b>00787</b>   25
.300 x 3"	<b>00794</b>   100	
<b>DRIVE PINS WITH WASHERS</b>		
.300 x 1"	<b>00797</b>   100	
.300 x 1-1/2"	<b>00803</b>   100	<b>00804</b>   25
.300 x 1-1/4"	<b>00800</b>   100	
.300 x 2"	<b>00806</b>   100	
.300 x 2-1/2"	<b>00809</b>   100	<b>00810</b>   15
.300 x 3"	<b>07886</b>   100	<b>07887</b>   15
<b>RAMGUARD DRIVE PINS FOR USE IN TREATED LUMBER</b>		
.300 x 2-1/2"	<b>09167</b>   100	
.300 x 2-1/2" with Washers	<b>09173</b>   100	
.300 x 3" with Washers	<b>09176</b>   100	
<b>RAMSET IFS PINS</b>		
1"	<b>16625</b>   50	
1-1/2"	<b>16638</b>   50	
2"	<b>16650</b>   50	

Caliber	Color	Type	Strip Load Part No.   Qty.	Single Shot Box Part No.   Qty.
.22	Brown	Powder		<b>00594</b>   100
.22	Green	Powder		<b>00601</b>   100
.22	Yellow	Powder		<b>00607</b>   100
.27	Green	Strip	<b>00652</b>   100	
.27	Yellow	Strip	<b>00667</b>   100	
.27	Red	Strip	<b>00682</b>   100	

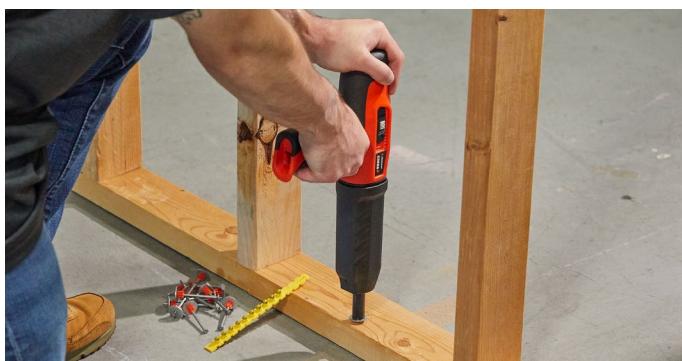

## APPLICATIONS:

- 2 x 4 framing
- Furring strips
- Attaching electrical boxes

# Teks®

Teks was established in 1967 with the introduction of the original self-drilling screw. Since then, we have continued to innovate and provide value-added metal fastening solutions to the construction market.

We take pride in our commitment to operational excellence, superior service and new product development. That has guided the company through decades of growth by meeting the ever-changing needs of the residential/renovation construction industry. Focusing on the needs of our end-users enables us to optimize our product offering and service based on their requirements.



# TEKS® METAL FASTENERS

## ROOFING SCREWS



Teks Roofing Screw



Teks Painted Roofing Screw



Teks Standing Seam Roofing Screw

## TEKS ROOFING SCREWS

**Teks Roofing Screws** provide secure metal to metal fastening with strong holding power, without need to pre-drill.

- **Self-Sealing Neoprene Washer:** Provides a waterproof seal
- **Premium Finish:** Provides exceptional corrosion resistance in harsh outdoor environments

**Teks painted roofing screws** are designed for fastening green or white metal roofing and siding panels with a perfect color match that provides a clean look and quality finish.

- **Full head paint coverage**
- Incorporates durable and long lasting liquid paint
- **High grade steel**
- **Weather tight seal**

**Teks Standing Seam Roofing Screws** are designed for attaching standing seam roofing panels into wood deck and framing.

- **Low Profile Head:** Flush finish that prevents dimples on panel
- **Star Drive:** Better bit to screw engagement
- **Zinc Plated:** Corrosion resistant coating
- **Coarse Thread:** Maximum gripping power in wood decking
- **Sharp Point:** Quick bite and faster install

U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.   Qty.	Handy Pack Part No.   Qty.
<b>TEKS® ROOFING SCREWS</b>		
<b>HEX WASHER HEAD / SHARP POINT ( METAL TO WOOD )</b>		
9 x 1"	<b>21401</b>   360	<b>21400</b>   120
9 x 1-1/2"	<b>21406</b>   400	<b>21404</b>   100
<b>HEX WASHER HEAD / DRILL POINT ( METAL TO METAL )</b>		
12 x 3/4"		<b>21408</b>   90
12 x 1"	<b>21418</b>   400	<b>21412</b>   80
12 x 1-1/2"	<b>21422</b>   300	<b>21419</b>   75
12 x 3"		<b>21417</b>   40
<b>TEKS® PAINTED ROOFING SCREWS (SHARP POINT)</b>		
9 x 1-1/2" (Green)		<b>21414</b>   100
9 x 1-1/2" (White)		<b>21424</b>   100
<b>TEKS® STANDING SEAM ROOFING SCREWS</b>		
10 x 1"	<b>21601</b>   360	<b>21607</b>   120
10 x 1-1/2"		<b>21605</b>   100
12 x 1"		<b>21603</b>   120

# TEKS® ELITE METAL FASTENERS

## ROOFING SCREWS

Teks®



Teks Elite  
Roofing Screw



## TEKS ELITE ROOFING SCREWS

The Teks Elite Roofing Screws are trusted for their superior drilling performance, fast installation and holding power – making them the go-to screw for pros who want unparalleled performance and superior results.

- **Maxiseal™ Washer:** Integrated washer head with a large EPDM rubber washer for better waterproofing - even at an angle.
- **Shankguard™:** Improved under-roof corrosion resistance.
- **Hi-grip™\* Threading:** Prevents water entry and over-drilling  
\*Not available on 1" screws
- **Climacoat Coating:** No streaking or rust from corrosion
- Available in drill point and sharp point


U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.   Qty.	Handy Pack Part No.   Qty.
<b>TEKS® ELITE PREMIUM ROOFING SCREWS</b>		
<b>SHARP POINT</b>		
10 x 1-1/2"	<b>21453</b>   300	<b>21452</b>   100
10 x 2"	<b>21455</b>   240	<b>21454</b>   80
10 x 2-1/2"		<b>21456</b>   60
12 x 1"	<b>21451</b>   360	<b>21450</b>   120
<b>DRILL POINT</b>		
12 x 1"	<b>21471</b>   240	<b>21470</b>   80
12 x 1-1/2"	<b>21473</b>   225	<b>21472</b>   75
12 x 2"	<b>21475</b>   150	<b>21474</b>   50
12 x 3"		<b>21476</b>   40

# TEKS® METAL FASTENERS

## METAL TO METAL SCREWS



**Teks**  
Metal to Metal Screw

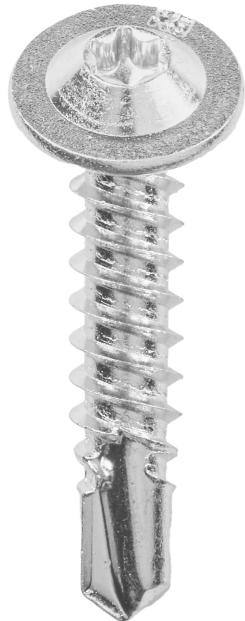

**Teks Elite**  
Metal to Metal Screw

## SECURELY FASTEN METAL WITH SPEED

Teks® fasteners are offered in sharp and drill points that easily penetrate light to heavy gauge metal and wood. Professionals no longer have to struggle when engaging their work surface.

Teks® fasteners are offered in a wide variety of head styles to meet professionals installation needs. No tool slippage or cam-outs even with old sockets and worn bits. Professionals can drill, tap, and fasten – all in one motion.

- **Drive surface and recess:** Reduces cam-outs to prevent slipping during installation
- **Drill Points:** Self-drills through light to heavy gauge metal with ease
- **Sharp Points:** Self-pierces into light gauge metal to start drilling faster
- **Self-Tapping Threads:** Taps their own threads to provide less effort when fastening into metal
- **Corrosion Resistant Finish:** Protects the job's appearance with long lasting coating

The Teks Elite Metal to Metal Screws are trusted for their stronger holding power and improved waterproofing. Less rework. More productivity. These top-of-the-line fasteners are among the best in the industry.

- **T-20 Star Drive:** Reduces wobble and screw loss.
- **Lightning Point™:** Starts faster and reduces walking on metal
- **Low Profile Head:** Provides semi-flush finish and better clamping force for any application

U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.   Qty.	Handy Pack Part No.   Qty.
<b>TEKS® METAL TO METAL SCREWS</b>		
<b>HEX WASHER HEAD / DRILL POINT ( METAL TO METAL )</b>		
8 x 1/2"		<b>21308</b>   280
8 x 3/4"		<b>21312</b>   180
8 x 1"		<b>21316</b>   170
10 x 5/8"		<b>21396</b>   170
10 x 3/4"	<b>21322</b>   450	<b>21320</b>   150
10 x 1"		<b>21328</b>   140
10 x 1-1/2"		<b>21332</b>   90
12 x 3/4"		<b>21336</b>   120
12 x 1"	<b>21341</b>   400	<b>21340</b>   100
12 x 1-1/2"		<b>21344</b>   80
12 x 2"		<b>21348</b>   60
12/14 x 2"		<b>21820</b>   60
14 x 3/4"		<b>21349</b>   100
14 x 1"		<b>21351</b>   60
14 x 1-1/2"		<b>21352</b>   50
14 x 2-1/2"	<b>21358</b>   120	<b>21356</b>   30
<b>HEX WASHER HEAD / SHARP POINT ( METAL TO METAL )</b>		
6 x 1/2"		<b>21301</b>   320
8 x 1-1/2"		<b>21318</b>   85
10 x 3/4"		<b>21327</b>   150
<b>PAN HEAD / DRILL POINT ( METAL TO METAL )</b>		
8 x 1/2"		<b>21360</b>   300
8 x 3/4"		<b>21364</b>   240
10 x 3/4"		<b>21372</b>   170
<b>PAN HEAD / SHARP POINT ( METAL TO METAL )</b>		
6 x 1/2"		<b>21359</b>   300
<b>PANCAKE HEAD / DRILL POINT ( METAL TO METAL )</b>		
10 x 5/8"		<b>21376</b>   190
<b>TEKS® ELITE METAL TO METAL SCREWS</b>		
<b>DRILL POINT ( METAL TO METAL )</b>		
8 x 1/2"		<b>21303</b>   240
8 x 3/4"		<b>21304</b>   180
10 x 1"		<b>21307</b>   140
10 x 3/4"		<b>21306</b>   150
12 x 1"		<b>21309</b>   100
<b>SHARP POINT ( METAL TO METAL )</b>		
8 x 3/4"		<b>21300</b>   180

# TEKS® METAL FASTENERS

## LATH SCREWS AND WOOD TO METAL SCREWS



**LATH SCREW**



**WOOD TO METAL SCREW**

**Teks Lath Screws** provide secure metal-to-metal and metal-to-wood fastening with strong holding power, without the need to pre-drill.


- **Lath head:** Lath Screws feature a low-profile head for a semi-flush finish for virtually any application
- **Self-tapping threads:** Ensure strong holding power
- **Zinc plated finish:** Protects the job's appearance.

**Teks Wood-to-Metal screws** help you secure wood to metal without pre-drilling. The special wings ream a hole in the wood to prevent thread engagement during drilling; these wings break away when self-tapping into metal providing a secure hold.

- **Star Drive:** zero stripping with 6 points of contact
- **Precision point with wings:** Designed to drill, tap, and fasten all in one motion
- **Climacoat premium coating:** Provides a long life finish for exterior applications
- **High performance drive:** Surfaces reduce cam-outs to penetrate surface the first time for easy installation
- **Wings:** Ream a hole in the wood to prevent thread engagement and break away when self-tapping into metal

U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.   Qty.	Handy Pack Part No.   Qty.
<b>TEKS® LATH SCREWS</b>		
<b>MODIFIED TRUSS HEAD / SHARP POINT ( METAL OR LATH TO WOOD )</b>		
8 x 1/2"		<b>21500</b>   260
8 x 3/4"	<b>21506</b>   600	<b>21504</b>   200
8 x 1"	<b>21510</b>   510	<b>21508</b>   170
8 x 1-1/4"		<b>21512</b>   140
8 x 1-5/8"		<b>21516</b>   120
8 x 2"		<b>21518</b>   100
8 x 2-1/2"		<b>21519</b>   80
<b>MODIFIED TRUSS HEAD / DRILL POINT ( LATH OR METAL TO METAL )</b>		
8 x 1/2"		<b>21520</b>   260
8 x 3/4"	<b>21525</b>   600	<b>21524</b>   200
8 x 1"	<b>21530</b>   510	<b>21528</b>   170
8 x 1-1/4"		<b>21532</b>   140
8 x 1-5/8"		<b>21536</b>   120
8 x 2"		<b>21538</b>   100
8 x 2-1/2"		<b>21540</b>   80
<b>TEKS® WOOD TO METAL SCREWS</b>		
<b>STAR HEAD / DRILL POINT W/REAMER WINGS ( WOOD TO METAL )</b>		
1/4-20 x 3"		<b>21395</b>   40
10 x 1-7/16"	<b>21392</b>   300	<b>21391</b>   100
12 x 2-3/4"	<b>21394</b>   200	<b>21393</b>   40

## APPLICATIONS



### LATH SCREWS:

- Attaching lath to wood or steel studs for stucco/plaster applications
- Attaching pre-drilled metal brackets to post-framing
- Any general applications requiring a wide low-profile head



### WOOD TO METAL:

- Attaching roof/subfloor decking
- Attaching trailer beds to frame
- Attaching wood headers to steel frame

# BACKER-ON® ROCK-ON® CEMENT BOARD SCREWS

## CEMENT BOARDS FASTENED RIGHT




Backer-On® Rock-On® cement board screws are designed for attaching HardieBacker® cement board and Durock® cement board to wood or light gauge steel studs. The patented serrated head design countersinks for a flush finish even at angle, providing a smooth surface for tile installation. The T-25 Star Drive recess provides Stikfit™ for onehanded installation. Climacoat corrosion resistant finish prevents rust from bleeding into grout. Making it perfect for use in high moisture areas such as bathrooms and kitchens.

Backer-On® Rock-On® cement board screws comply with ANSI standards for cement board installation as specified by cement board manufacturers. Cement board manufacturers require ANSI compliance in order to remain eligible for warranty.

- **Serrated Head:** Designed to drive flush even at an angle
- **Star Drive with T-25 Bit:** Provides Stikfit™ for easy one-handed installation and eliminates cam-outs
- **Hi-Lo / Single Threads:** Starts quickly and drives smooth in cement boards
- **Sharp Points:** Offers immediate pick-up and eliminates the need to pre-drill
- **Climacoat Finish:** Corrosion resistant for preventing rust from bleeding into tile

# BACKER-ON.<sup>®</sup> ROCK-ON.<sup>®</sup>

U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.   Qty.	Handy Pack Part No.   Qty.
<b>BACKER-ON<sup>®</sup> ROCK-ON<sup>®</sup> SCREWS</b>		
#9 x 1-1/4"	<b>23505</b>   750	<b>23500</b>   185
#9 x 1-5/8"	<b>23515</b>   575	<b>23510</b>   140
#9 x 2-1/4"		<b>23520</b>   100

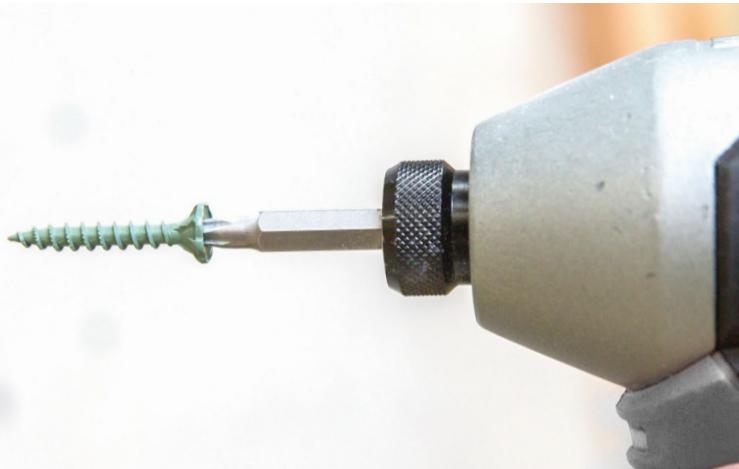

## APPLICATIONS:

- Attaching fiber cement board to wood or light gauge steel framing
- Attaching fiberglass reinforced cement board to wood or light gauge steel framing

**Pro Tip:** Standard roofing nails, dry wall screws, and other alternatives to cement board screws are typically not specified by cement board manufacturers and not ANSI compliant.

# E-Z ANCOR® DRYWALL ANCORS



E-Z Ancor® Twist-N-Lock



E-Z Ancor® Stud Solver



E-Z Ancor® Toggle Lock



E-Z Ancor® Heavy Duty  
Toggle Lock

## EASY TO INSTALL WITH STRONG HOLDING POWER

**E-Z Ancor®** are ideal for hanging accessories, signs, fixtures, and shelving units on drywall. Designed to self-drill flush into drywall for easy and fast installations. No pre-drilling necessary. The threads are formed to provide increased stability and a secure hold.

**E-Z Ancor® Twist-N-Lock** is designed for light to medium-duty applications. The audible click provides confirmation of the anchor being firmly set. Threads cut deeply to resist pull-out and provide a secure hold.

**E-Z Ancor® Stud Solver** is designed for light to medium-duty applications. Installs anywhere on a wall, even if you hit a wood stud behind the drywall. Threads cut deeply to resist pull-out and provide a secure hold.

**E-Z Ancor® Toggle Lock** is designed for heavy-duty drywall applications. The superior 1-piece assembly prevents losing extra pieces behind the wall. The toggle bar swivels easily during assembly to provide a secure hold.

**Buildex® Stucco Anchor** is designed for light to medium-duty applications in stucco. The zinc plating is designed to be durable in exterior and interior applications. Kits include a drill bit for installation.

**E-Z Ancor® Heavy Duty Drywall Toggle Anchors** are designed for medium to heavy-duty hollow wall applications. The metal toggle bar clamps the wall providing an even and secure hold. The flexible plastic straps allow the toggle bar to swivel for easy installation.

- **No Pre-Drilling:** Screws directly into drywall with a Phillips screwdriver
- **Self-Piercing Point:** Positions anchor in desired location without slipping and starts self-drilling faster
- **Clean Finish:** Installs flush into drywall
- **Strong Holding Power:** Prevents loose connections and items from wobbling

U.S (Std.) Size (Max Load)	Lg. Pack Part No.   Qty.	Med. Pack Part No.   Qty.	Small. Pack Part No.   Qty.
<b>E-Z ANCOR TWIST-N-LOCK ANCHORS</b>			
50 lbs.	<b>25350</b>   50	<b>25200</b>   25	<b>11353</b>   6
75 lbs.	<b>25310</b>   50	<b>25210</b>   20	<b>11364</b>   4
<b>E-Z ANCOR STUD SOLVER ANCHORS</b>			
40 lbs.	<b>25325</b>   50	<b>25225</b>   25	<b>25125</b>   4
50 lbs.	<b>25316</b>   50	<b>25216</b>   20	<b>29503</b>   4
<b>E-Z ANCOR / E-Z TOGGLE LOCK ANCHOR</b>			
100 lbs.	<b>25320</b>   25	<b>25220</b>   10	<b>10006</b>   2
<b>BUILDEX® STUCCO ANCHORS</b>			
3/16"x 1-1/2"Hex Hd		<b>31810</b>   25	<b>31710</b>   4
3/16"x 1-1/2"Flat Hd		<b>31820</b>   25	<b>31720</b>   4
1/4"x 2-7/8"		<b>31840</b>   25	<b>31740</b>   4
<b>E-Z ANCOR HEAVY DUTY TOGGLE ANCOR</b>			
110 lbs. - 3/16" Bolt		<b>25730</b>   25	<b>25720</b>   10
120 lbs. - 1/4" Bolt		<b>25731</b>   25	<b>25721</b>   10

<b>E-Z ANCOR CONTRACTOR PACKS</b>	
U.S (Std.) Size (Max Load)	Contractor Pack Part No.   Qty.
<b>E-Z ANCOR CONTRACTOR TWIST-N-LOCK ANCHORS</b>	
75 lbs.	<b>25410</b>   100
<b>E-Z ANCOR CONTRACTOR STUD SOLVER ANCHORS</b>	
50 lbs.	<b>25616</b>   100
<b>E-Z ANCOR TWIST-N-LOCK AND STUD SOLVER ANCHORS COMBO</b>	
50 lbs./75 lbs.	<b>25600</b>   25/25

**Warning:** Do not use Twist-N-Lock or Stud Solver anchors for ceiling applications. Do not use for mounting televisions. Load ratings are for items hung flush to the wall. Load ratings decrease when hanging items that project from the wall.



## APPLICATIONS:

For Mounting:

- Picture Frames
- Shelving
- Mounting Brackets
- Hooks
- And more

# FASTENER APPLICATION INFORMATION

ITW's Residential and Renovation Construction product lines are used in a variety of fastening applications. When choosing a fastener for a particular application, consideration needs to be made regarding its environment, particularly when exposed to moisture, treated lumber, dissimilar materials, and/or marine environments. These coating and material guidelines are not exhaustive and individual application conditions need to be considered prior to design or use.

For more assistance, please contact Customer Service at (877) 489-2726.

## ENVIRONMENTAL CONDITION QUICK REFERENCE<sup>1</sup>

Product Line	Coating	Interior <sup>2</sup>	Exterior, Protected <sup>3</sup>	Exterior, Exposed <sup>4</sup>	Freshwater/ Coastal <sup>5</sup>	Marine/High Chloride <sup>6</sup>
Paslode	Brite	X				
	Electrogalvanization	X				
	Hot Dip Galvanization	X	X	X		
	Mechanical Galvanization	X	X	X		
	HDG PLUS	X	X	X		
	304 Stainless Steel	X	X	X	X	
	Aluminum	X	X	X		
Tapcon	Blue Climaseal	X	X			
	Black Climaseal	X	X			
	White Ultrashield	X	X	X		
	Silver Ultrashield	X	X	X		
	410 Stainless Plus Ultrashield	X	X	X		
Red Head	Zinc Electroplate	X				
	Hot Dip Galvanization	X	X	X		
Ramset	Zinc Plated	X				
	Ramguard	X	X			
GRK	Zinc Electroplate with Painted Head	X				
	Climatek	X	X	X		
	White Climatek	X	X	X		
	Black Climatek	X	X	X		
	Silver Climatek	X	X	X		
	Deck Elite	X	X	X		
	305 Stainless Steel	X	X	X	X	
	316 Stainless Steel	X	X	X	X	X
Rock-On/Backer-On	Climacoat	X				
TEKS	Zinc Electroplate	X				
	Zinc Flake	X	X			
	Gray Spex	X	X			
	TEKS Climacoat	X	X	X		

1. For cases when the environmental condition is not known, it is recommended to conservatively choose a fastener with a higher level of corrosion resistance.
2. Dry, interior conditions, with minimal direct moisture contact.
3. Outdoor conditions that result in intermittent water exposure. Applications are either covered by features such as roofing or lap siding or temporarily exposed to precipitation but allow for quick drainage.
4. Outdoor conditions that result in exposure to the full effects of weather.
5. Conditions where fasteners are regularly exposed to freshwater, or in regions of high humidity, such as being within 1 and 15 miles of a coast.
6. Within one (1) mile of seawater coast or direct exposure to chlorides, such as de-icing salts.

## WOOD APPLICATION QUICK REFERENCE

Product Line	Coating	Untreated Wood <sup>1</sup>	Chemically Treated Wood, Above Ground <sup>2</sup>	Chemically Treated Wood, Ground Contact <sup>3</sup>	Naturally Protected Wood <sup>4</sup>
Paslode	Brite	X			
	Electrogalvanization	X			
	Hot Dip Galvanization	X	X	X	X <sup>5</sup>
	Mechanical Galvanization	X	X	X	X
	HDG PLUS	X	X	X	X
	304 Stainless Steel	X	X	X	X
	Aluminum	X			X
Tapcon	Blue Climaseal	X			
	Black Climaseal	X			
	White Ultrashield	X			
	Silver Ultrashield	X			
	410 Stainless Plus Ultrashield	X			
Red Head	Zinc Electroplate	X			
	Hot Dip Galvanization	X	X	X	X <sup>5</sup>
Ramset	Zinc Plated	X			
	Ramguard	X	X		
GRK	Zinc Electroplate with Painted Head	X			
	Climatek	X	X <sup>6</sup>	X <sup>6</sup>	
	Black Climatek	X	X <sup>6</sup>	X <sup>6</sup>	
	White Climatek	X	X <sup>6</sup>	X <sup>6</sup>	
	Silver Climatek	X	X <sup>6</sup>	X <sup>6</sup>	
	Deck Elite	X	X	X	
	305 Stainless Steel	X	X	X	X
	316 Stainless Steel	X	X	X	X
Rock-On/Backer-On	Climacoat	X			
TEKS	Zinc Electroplate	X			
	Zinc Plate	X			
	Gray Spex	X			
	TEKS Climacoat	X	X		

1. Sawn or processed lumber that has not undergone chemical treatment.
2. Wood with preservative treatment such as ACQ or CA, with above ground contact according to AWPA Use Category UC3A.
3. Wood with preservative treatment such as ACQ or CA, with ground contact according to AWPA Use Category UC4A or ICC-ES AC257 Exposure Condition 3.
4. Wood species such as cedar or redwood that are naturally protected from environmental decay.
5. Interaction between naturally protected woods and HDG coatings may result in staining.
6. See ICC-ES ESR-3201 or ESR-2442 for details on approved preservative types.

## **LIABILITY AND WARRANTIES**

**Mechanical Fastening Warranty:** (Includes GRK Fasteners, Tapcon, Red Head, Ramset, Teks, Rock-On, Backer-On, and E-Z Ancor). ITW Brands warrants that these products are free from defects in material and workmanship. ITW Brands's sole liability for any breach of this warranty shall be to replace this product or refund the purchase price.

**Liability:** Claims against GRK or ITW Brands shall be limited to a refund or credit for the price billed or paid for faulty or incorrect merchandise. Seller shall not be responsible for buyer's manufacturing costs, labor, alternate purchases, extra freight, replating, plating, lost profit, good will, recall costs, or other incidental or consequential damages.

**Refunds/Replacements:** In order to request a refund or replacement, please contact ITW Customer Service at [BrandsCS@itwbrands.com](mailto:BrandsCS@itwbrands.com) or 877-489-2726 to start the process.

**THERE ARE NO UNDERSTANDINGS, AGREEMENTS, REPRESENTATIONS, OR ADDITIONAL WARRANTIES, EXPRESSED OR IMPLIED (INCLUDING ANY REGARDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), NOT SPECIFIED HEREIN, RESPECTING ANY SALE OF PRODUCTS BY GRK FASTENERS™ (TO THE EXTENT PERMITTED BY LAW).**

## **LIABILITY AND WARRANTIES**

GRK Fasteners™ (“GRK”) is a distributor of commercial-grade fasteners. The parts that we supply are quality inspected by independent labs.

We maintain lot traceability on all products listed in this catalog as long as they are in their original bulk boxes. Certifications are maintained on all fasteners.

**Hydrogen Embrittlement:** GRK takes measures during production of all fasteners to mitigate hydrogen embrittlement, including post-coating baking. These processes, however, do not guarantee that hydrogen embrittlement will not still be present or that it will not occur at a later date while in service. Specialized testing or a substitute part may be required, depending on the application.

**GRK Warranty:** GRK warrants to the first retail purchaser that its Climatek™ coated, Deck Elite coated, and stainless steel screws will not rust under normal environmental conditions when used in accordance with the recommendations listed in this catalog. This warranty is not transferable.

Visit [www.grkfasteners.com](http://www.grkfasteners.com) for more information.

# FULL-LINE CATALOG

